


8.5 mm Diameter Single-Turn Fully Sealed Container Cermet Trimmer

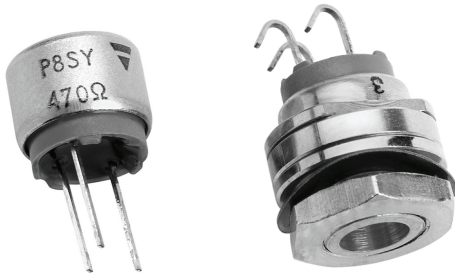


FEATURES

- Industrial grade
- High quality cermet resistive track:
 - 1 W at 70 °C, P8ST
 - 0.5 W at 70 °C, P8SX and P8SY
- Test according to CECC 41000 or IEC 60393-1
- Wide resistance range (10 Ω to 2.2 MΩ)
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

The P8S series trimmers are well adapted for all industrial applications as their maximum resistance contact variation is within 3 % of R_n and as they are fully sealed.

For more stringent requirements the P8P series is recommended.

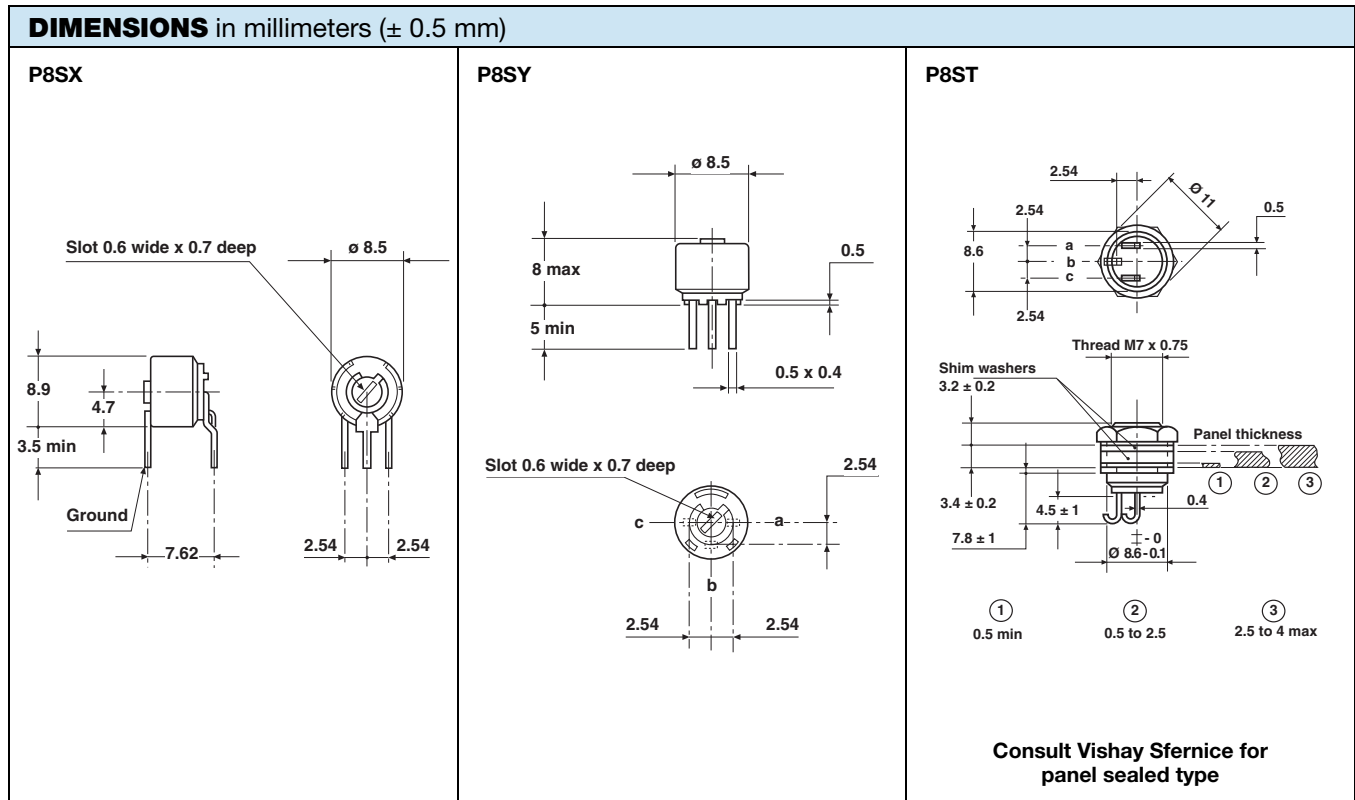

ELECTRICAL SPECIFICATIONS																													
Resistive element		Cermet																											
Electrical travel		270° ± 15°																											
Resistance range		10 Ω to 2.2 MΩ																											
Standard series E3		1 - 2.2 - 4.7 and on request 1 - 2 - 5																											
Tolerance	standard	± 10 %																											
	on request	± 5 %																											
Power rating	P8SX, P8SY	0.5 W at 70 °C																											
	P8ST	1 W at 70 °C																											
Power rating chart	<table border="1"> <caption>Power Rating Chart Data</caption> <thead> <tr> <th>Ambient Temperature (°C)</th> <th>P8ST Power (W)</th> <th>P8SX - P8SY Power (W)</th> </tr> </thead> <tbody> <tr><td>0</td><td>1.0</td><td>0.5</td></tr> <tr><td>20</td><td>1.0</td><td>0.5</td></tr> <tr><td>40</td><td>1.0</td><td>0.5</td></tr> <tr><td>60</td><td>1.0</td><td>0.5</td></tr> <tr><td>70</td><td>1.0</td><td>0.5</td></tr> <tr><td>80</td><td>0.8</td><td>0.4</td></tr> <tr><td>100</td><td>0.4</td><td>0.2</td></tr> <tr><td>125</td><td>0</td><td>0</td></tr> </tbody> </table>		Ambient Temperature (°C)	P8ST Power (W)	P8SX - P8SY Power (W)	0	1.0	0.5	20	1.0	0.5	40	1.0	0.5	60	1.0	0.5	70	1.0	0.5	80	0.8	0.4	100	0.4	0.2	125	0	0
Ambient Temperature (°C)	P8ST Power (W)	P8SX - P8SY Power (W)																											
0	1.0	0.5																											
20	1.0	0.5																											
40	1.0	0.5																											
60	1.0	0.5																											
70	1.0	0.5																											
80	0.8	0.4																											
100	0.4	0.2																											
125	0	0																											
Circuit diagram																													
Temperature coefficient	See Standard Resistance Element Table																												
Limiting element voltage (linear law)	250 V																												
Contact resistance variation	3 % R _n or 3 Ω																												
End resistance (typical)	1 Ω																												
Dielectric strength (RMS)	1000 V																												
Insulation resistance (500 V _{DC})	1 GΩ																												

MECHANICAL SPECIFICATIONS		
Mechanical travel		300° ± 5°
Operating torque (max. Ncm)		3
End stop torque (max. Ncm)		6
Unit weight (max. g)	P8SX, P8SY	1.1
	P8ST	3.6
Terminals	SnAg alloy (code e2)	

ENVIRONMENTAL SPECIFICATIONS		
Temperature range	-55 °C to +125 °C	
Climatic category	55/125/56	
Sealing	IP67 Fully sealed	



PERFORMANCES			
TESTS	CONDITIONS	TYPICAL VALUES AND DRIFTS	
		$\Delta R_T/R_T$ (%)	$\Delta R_{1-2}/R_{1-2}$ (%)
Load life	1000 h at rated power 90'/30' - ambient temperature 70 °C	± 2 % Contact res. variation: < 3 % Rn	± 3 %
Climatic sequence	Phase A dry heat 100 °C Phase B damp heat Phase C cold -55 °C Phase D damp heat 5 cycles	± 0.5 %	± 1 %
Long term damp heat	56 days 40 °C, 93 % RH	± 1 % Dielectric strength: 1000 V _{RMS} Insulation resistance: > 10 ⁴ MΩ	± 2 %
Rapid temperature change	5 cycles -55 °C to +125 °C	± 0.5 %	$\Delta V_{1-2}/\Delta V_{1-3}$ $\leq \pm 1$ %
Shock	50 g at 11 ms 3 successive shocks in 3 directions	± 0.2 %	± 0.5 %
Vibration	10 Hz to 55 Hz 0.75 mm or 10 g during 6 h	± 0.2 %	$\Delta V_{1-2}/\Delta V_{1-3}$ $\leq \pm 0.5$ %
Rotational life	200 cycles	± 3 % Contact res. variation: < 3 % Rn	

Note

- Nothing stated herein shall be construed as a guarantee of quality or durability

STANDARD RESISTANCE ELEMENT DATA							
STANDARD RESISTANCE VALUES	P8SX, P8SY			P8ST			TYPICAL TCR -55 °C to +125 °C
	MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. CURRENT THROUGH WIPER	MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. CURRENT THROUGH WIPER	
Ω	W	V	mA	W	V	mA	ppm/°C
10	0.5	2.2	224	1	3.16	316	± 100
22	0.5	3.3	150	1	4.69	213	
47	0.5	4.8	103	1	6.86	146	
100	0.5	7.0	70	1	10.0	100	
220	0.5	10.5	47	1	14.8	67	
470	0.5	15.3	32	1	21.7	46	
1K	0.5	22.4	22	1	31.6	32	
2.2K	0.5	33.2	15	1	46.9	21	
4.7K	0.5	48.5	10	1	68.6	15	
10K	0.5	70.7	7.0	1	100	10	
22K	0.5	105	4.8	1	148	6.7	
47K	0.5	153	3.2	1	217	4.6	
100K	0.5	224	2.2	0.63	250	2.5	
220K	0.28	250	1.1	0.28	250	1.1	
470K	0.13	250	0.53	0.13	250	0.53	
1M	0.06	250	0.25	0.06	250	0.25	
2.2M	0.028	250	0.11	0.03	250	0.11	



MARKING
<ul style="list-style-type: none"> • Vishay trademark • Model • Style • Ohmic value (in Ω, kΩ, MΩ) • Tolerance (in %) • Manufacturing date • Marking of terminal: 3

PACKAGING
<ul style="list-style-type: none"> • In plastic box of 50 pieces, code B25 (BL50)

ORDERING INFORMATION (part number)														
P	8	S	X	1	0	4	K	B	2	5				
MODEL	STYLE		OHMIC VALUE			TOLERANCE		PACKAGING CODE		SPECIAL NUMBER				
P8	ST SX SY		From 10 Ω to 2.2 M Ω 103 = 10K			K = 10 % On request: J = 5 %		B25 = box 50 pieces		(If applicable) Given by Vishay for custom design				

PART NUMBER DESCRIPTION (for information only)							
P8	S	X	100K	10 %		BL	e2
MODEL	STYLE	STYLE	VALUE	TOLERANCE	SPECIAL	PACKAGING	LEAD FINISH

RELATED DOCUMENTS	
APPLICATION NOTES	
Potentiometers and Trimmers	www.vishay.com/doc?51001
Guidelines for Vishay Sfernice Resistive and Inductive Components	www.vishay.com/doc?52029
Selector guide	www.vishay.com/doc?49286

ACCESSORIES	
Screwdrivers (to order separately)	www.vishay.com/doc?57015



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.