

CL 222 TM

● TM13R- * *(50)













Figure 1 shows the PCB layout of the proposed antenna. The layout includes a rectangular patch with dimensions 12.3 mm by 17.8 mm. A 6- ϕ 0.8 Hole is located at the top left. The feed line has a width of 2.54 mm. The patch has a width of 12.3 mm and a length of 17.8 mm. The distance from the feed line to the patch is 8.5 mm. The distance from the patch to the right edge is 7.6 mm. The total width of the layout is 14.1 mm. The distance from the feed line to the top edge is 2.54 mm. The distance from the patch to the top edge is 1.52 mm. The distance from the patch to the bottom edge is 0.51 mm. The distance from the patch to the right edge is 2.4 mm. The distance from the patch to the bottom edge is 1 mm. The distance from the patch to the right edge is (R0.5).


PCB mounting hole layout
(Connector mounting side)

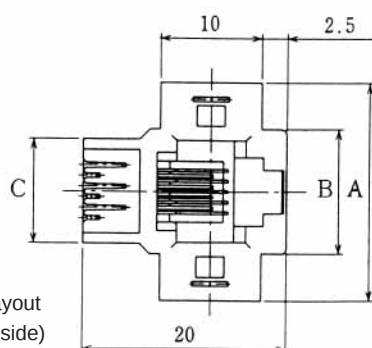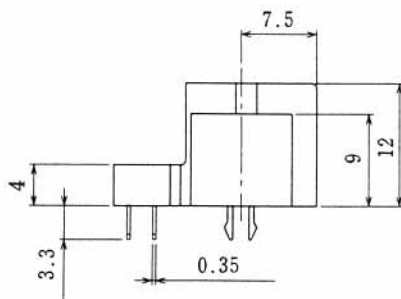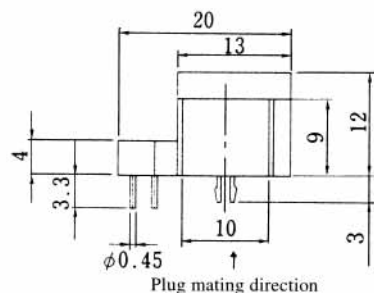

CL No.	Part No.	RoHS
222-1806-2-50	TM13RA-1010(50)	YES



PCB mounting hole layout
(Connector mounting side)

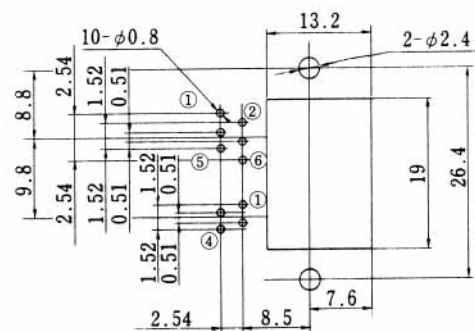

TM13R-10 * *(50)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[TM13R-1006\(50\)](#) [TM13RA-1006\(50\)](#) [TM13R-64\(50\)](#) [TM13R-44\(50\)](#) [TM13R-62\(50\)](#) [TM13R-66\(50\)](#)