


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

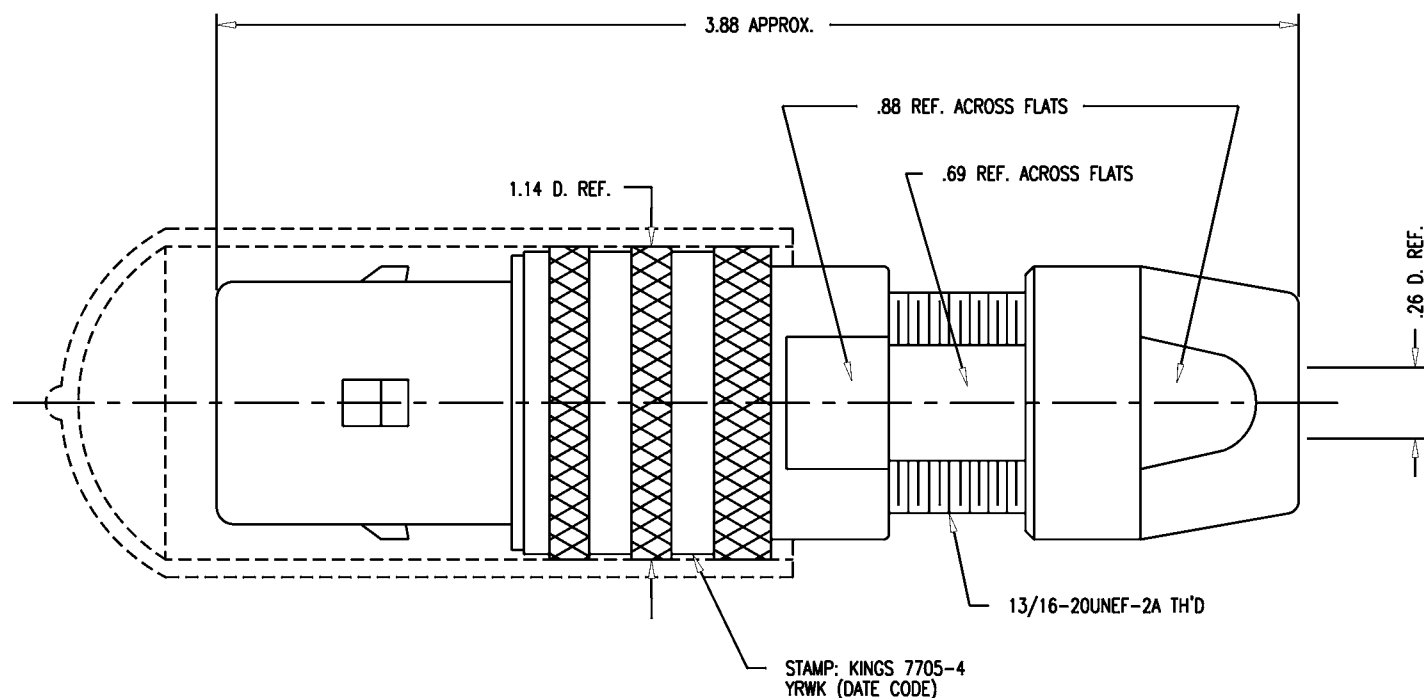

NOTES:

1. FOR USE WITH BELDEN 88232 & COMM SCOPE 8000257 (780 CABLE GROUP).
2. FOR CABLING INSTRUCTIONS SEE KAI-8010.
3. FOR CRIMPING USE DIE KTH-2002.
4. MATERIALS:
 INSULATORS: TEFLON, ASTM-D-4894
 CONDUCTIVE GASKET: CONSIL C 87-10004
 GASKETS: SILICONE RUBBER, ZZ-R-765
 K-GRIP SLEEVE: COM. BRONZE TUBE, ASTM-B-135
 OUTER CONTACT: PHOSPHOR BRONZE, ASTM-B-103
 FINGER BODY: BER. COPPER, ASTM-B-196
 CENTER CONTACT TIP: DELRIN
 CAP: VINYL
 ALL OTHER METAL PARTS: BRASS, ASTM-B16

5. FINISHES:
 CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
 NUT
 COLLET
 OUTER BODIES } KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
 ALL OTHER METAL PARTS: SILVER PLATE, PER QQ-S-365
6. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 75 OHMS
 FREQUENCY RANGE: DC-500 MHZ
 VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VRMS
 INNER GROUND/OUTER GROUND: 500 VRMS

7705-4

REVISIONS

ISSUE	CHANGES
0	ER 37088 KH 08/07/96
1	CN 38024 E HVN 07/06/00
2	CN 38122 C BDH 11/08/00

KAM6260

SCALE 2:1

APPROX SURFACE AREA

WAS: E-19091

USED ON

REF:

PLUG, TRI-LOC
(SERIAL DIGITAL)

DRAWN	KH	DATE	12/01/95
DESIGN	FD	DATE	12/02/95
APPR.	FD	DATE	12/11/95

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

7705-4

GSD