


Part Number: SL12 80003

Ordering Different Lead Types:

Inside Kinked Leads	Use -A after Ametherm's part #
Outside Kinked Leads	Use -B after Ametherm's part #

For example: to order an inside kinked lead use part number SL12 80003-A

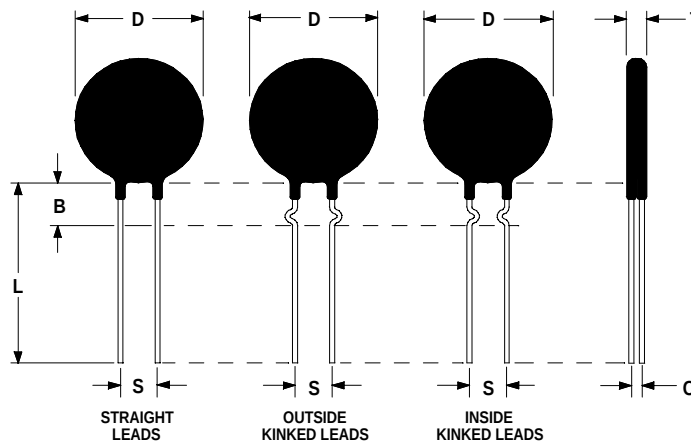

Electrical Specifications:

Resistance @ 25°C	80.0 Ω $\pm$ 20%
Max Steady State Current Up to 65°C	3.0 A
Max Recommended Energy Rating (Joules)	20.0 J
Actual Failure Point of Instantaneous Energy (Joules)	40.0 J
Resistance @ 100% of Max Current	0.750 Ω
Resistance @ 50% of Max Current	1.23 Ω
Body Temperature @ 100% Current Rating	152 °C
Dissipation Constant	12.7mW/°C
Thermal Time Constant	47 seconds
Material Type	"I"
Max Recommended Capacitance @ 120VAC/240VAC	1380 μ F/ 350 μ F
Resistance @1.90Amp	0.92 Ω

Mechanical Specifications:

D	12.0 $\pm$ 0.5 mm
T	5.1 $\pm$ 0.2 mm
Lead Diameter	0.8 $\pm$ 0.1 mm
S	7.8 $\pm$ 2.0 mm
L	38.0 $\pm$ 9.0 mm
Straight Leads Coating Run Down	5.0 $\pm$ 1.0 mm
B	6.35 $\pm$ 0.60 mm
C	3.42 $\pm$ 0.5 mm