
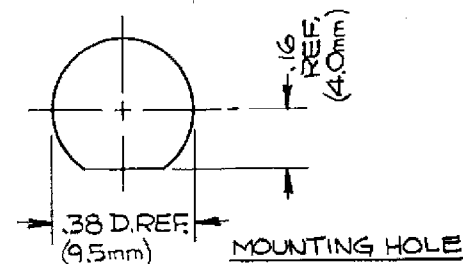


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

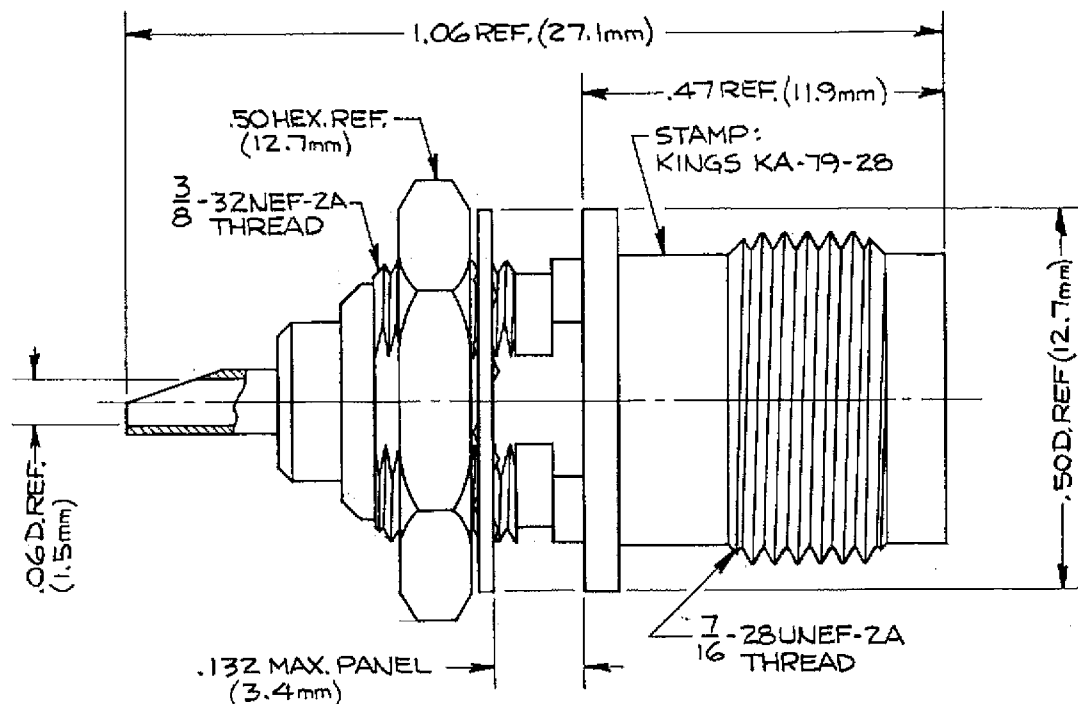

NOTES:

1. SAME AS KA-79-13 EXCEPT FOR FINISH.
2. MATERIAL: CENTER CONTACT- BERYLLIUM COPPER, QQ-C-530.
INSULATOR- TEFLON, L-P-403.
LOCKWASHER- PHOSPHOR BRONZE, QQ-B-750.
ALL OTHER PARTS- BRASS, QQ-B-626.
3. FINISH: CENTER CONTACT- SILVER PLATE PER QQ-S-365.
ALL OTHER METAL PARTS- KINGS TARNISH RESISTANT FINISH (TR-5).
4. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE - 50 Ω
FREQUENCY RANGE - DC TO 11 GHz.
VOLTAGE RATING - 500 VOLTS RMS.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
3 PLACE DECIMALS $\pm .004$ ANGLES $\pm 0^{\circ}30'$
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.

2. REMOVE ALL BURRS. BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.
6. ALL PLATING IN ACCORDANCE WITH KER 10004.

KA-79-28

GSD

REVISIONS

ISSUE	CHANGES
-------	---------

4 CN 19259 C
MA 23 SEP 79

GSD

SCALE 6:1

APPROX SURFACE AREA

USED ON

REF

TNC RECEPTACLE

DRAWN ZHC	DATE 15 OCT 86
APPR MJB	DATE 17 OCT 86
APPR	DATE

KINGS
ELECTRONICS CO., INC.
TULSA, OK 74114

GSD

KA-79-28