


REVISIONS		DOC. NO. SPC-F005 * Effective: 12/21/98 * DCP No: 680							
DCP #	REV	DESCRIPTION		DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
788	A	RELEASED		HYO	3/7/01	JC	5/18/01	DUC	5/18/01

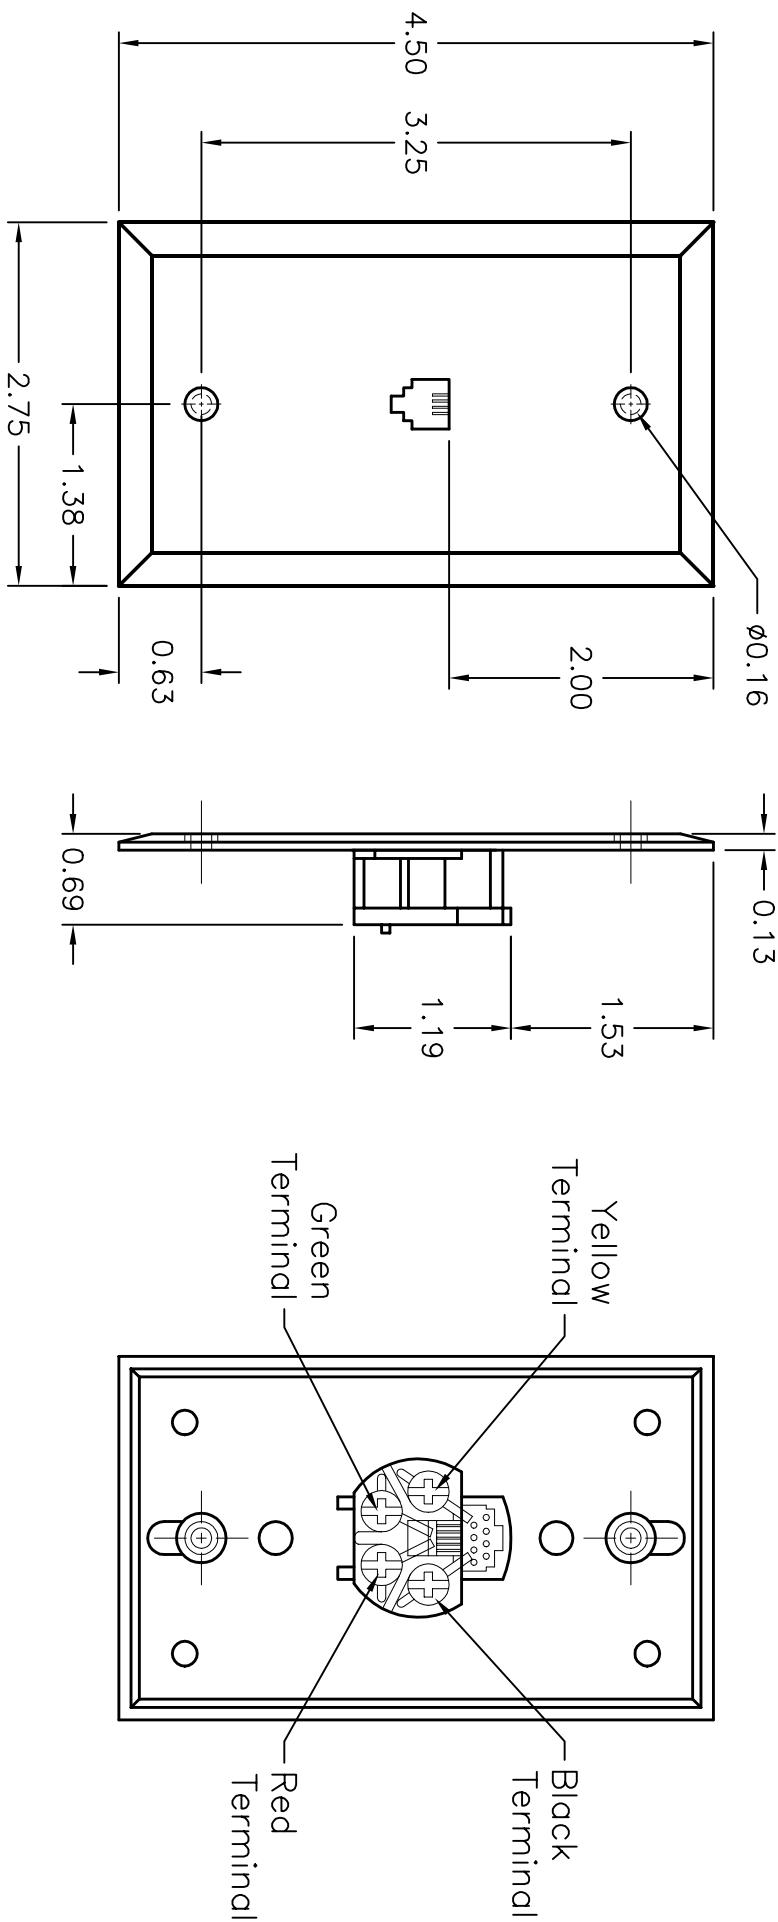

SPECIFICATIONS:

- CONNECTOR: 6 POSITION / 4 CONDUCTOR
- LEADWIRE: 26 AWG, 7 STRAND
- LEADWIRE COLORS: BLACK, RED, GREEN, YELLOW
- SPRING WIRE: 45mm (0.018 in) DIAMETER, PHOSPHOROUS BRONZE ALLOY
- HOUSING MATERIAL: ABS AND POLYCARBONATE
- COLOR: WHITE
- HARDWARE: (2) #8-32 MACHINE SCREWS

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THERETO.



SPC TECHNOLOGY

- INSULATION RESISTANCE: ≥ 500 MEGOHMS
- DIELECTRIC STRENGTH: 500 VAC RMS, 60 Hz
- CONTACT RESISTANCE: ≤ 15 MILLIOHMS
- CURRENT RATING: 1 1/2 AMPS
- RETENTION FORCE: 76 N (17 lbs)
- CRIMPING STRENGTH: 2.0 Kg (4.4 lbs)