


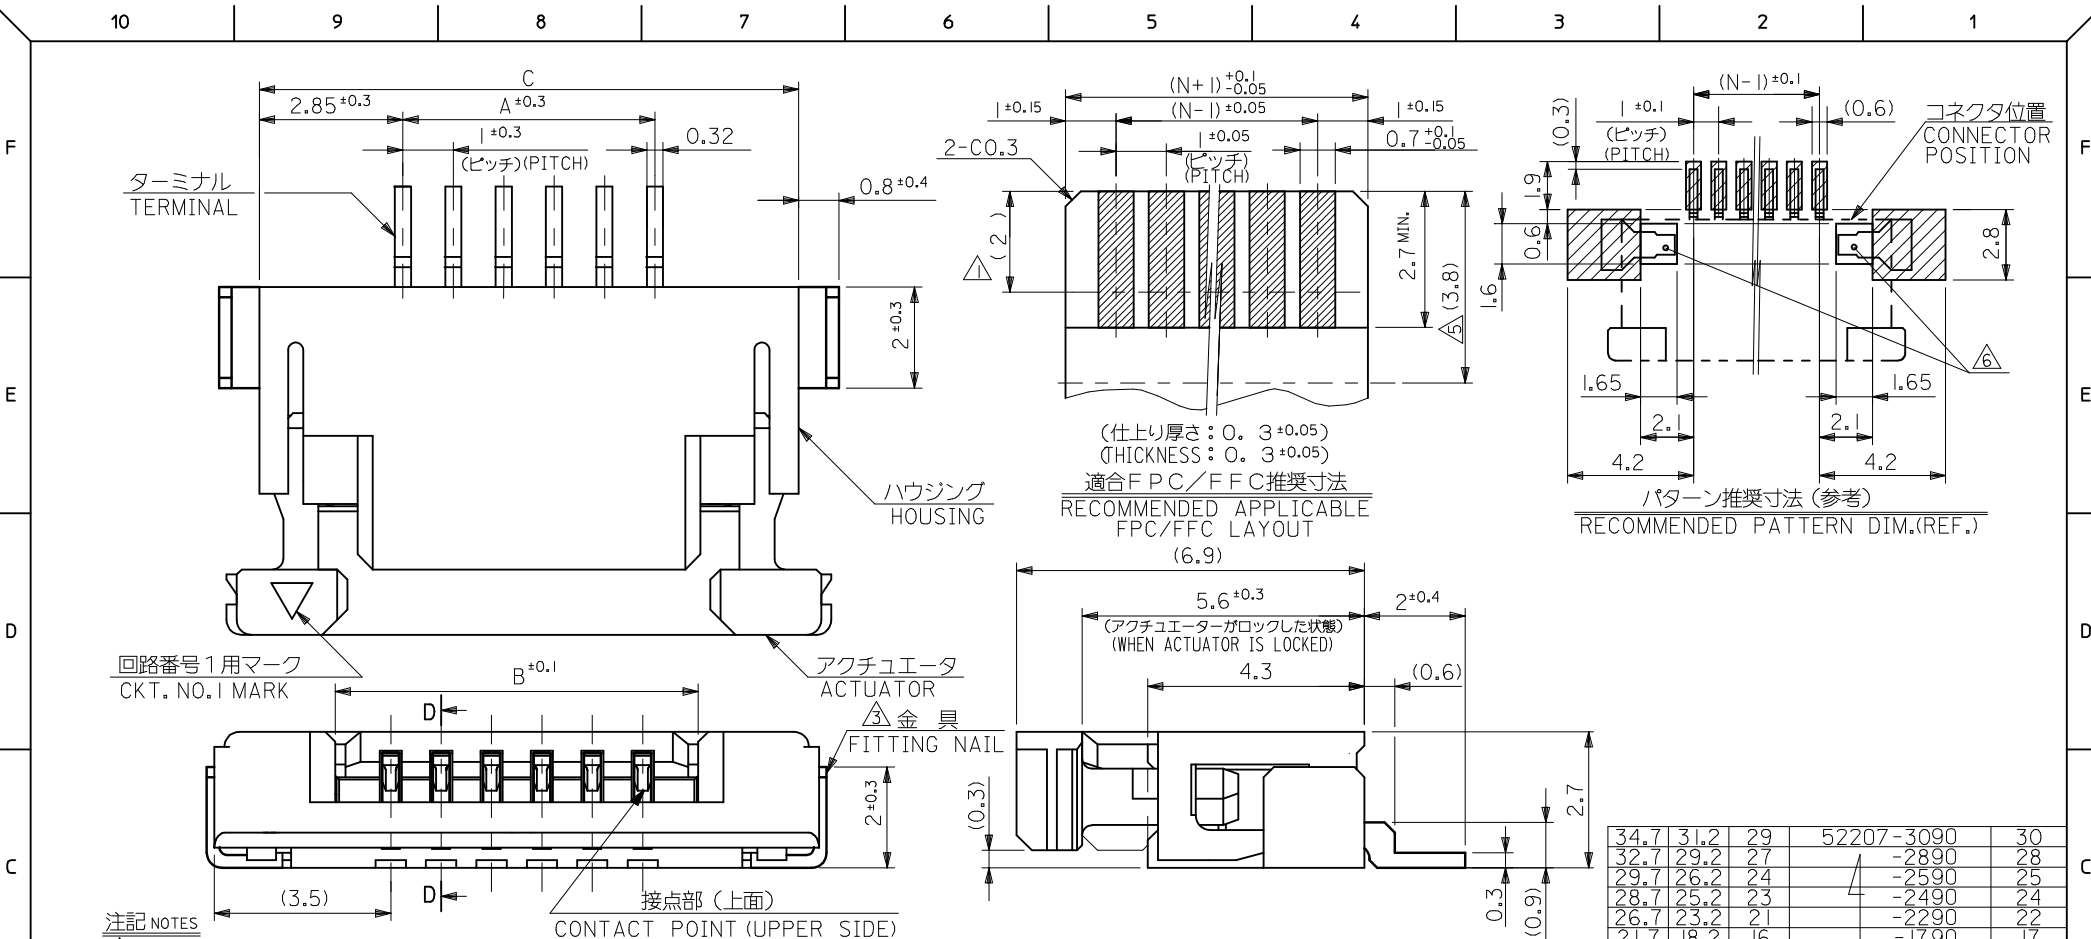

- 注記 NOTES
- 接点部までの嵌合長さ。
LENGTH TO CONTACT POINT.
 - 使用材料 MATERIAL
ハウジング : 46ナイロン (耐熱性), UL 94V-0
アクチュエータ : PPS, UL 94V-0
ターミナル : リン青銅、半田メッキ (t=0.32)
金具 : 銅合金、半田メッキ (t=0.25)
FITTING NAIL : COPPER ALLOY, TIN-LEAD PLATED (t=0.25)
 - パターンはくり止め用金具
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B.PATTERN.
 - エンボステープ梱包時は、アクチュエータがロックした状態とする。
IN THE PACKAGE, ACTUATOR OF PART NO. 52207-**17 SHOULD BE LOCKED.
 - ケーブル挿入深さ
INSERTION DEPTH OF CABLE.
 - パターン書き込み禁止エリア。
NO FOOT PRINT AREA.

34.7	31.2	29	52207-3090	30
32.7	29.2	27	-2890	28
29.7	26.2	24	-2590	25
28.7	25.2	23	-2490	24
26.7	23.2	21	-2290	22
21.7	18.2	16	-1790	17
19.7	16.2	14	-1590	15
18.7	15.2	13	-1490	14
15.7	12.2	10	-1190	11
14.7	11.2	9	-1090	10
13.7	10.2	8	-0990	9
12.7	9.2	7	-0890	8
11.7	8.2	6	52207-0790	7
C	B	A	EMBOSSD TAPE ORDER NO.	極数 CKT.

REVISED		EC NO: J2016-0429		DRWN: SANUMA		2015/10/26		CHKD: TAKAHASHI		2015/10/29		APPR: YNOGAWA		2015/11/13	
DESCRIPTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION		TITLE		DOCUMENT NO.	
0.25 UNDER		UNDER		±0.03		DRAWN BY		DATE		1.0 FPC CONN. ZIF SMT		SHEET NO.		SD-52207-071	
0.25 OVER		0.5 UNDER		±0.05		MTAKAHASHI		2013/07/24		(SHEET 1 OF 2)		1 OF 2			
0.5 OVER		1.0 UNDER		±0.1		TAKAHASHI		2013/07/24		molex					
1.0 OVER		10 UNDER		±0.2		APPROVED BY		DATE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
10 OVER		30 UNDER		±0.25		YNOGAWA		2013/10/07							
30 OVER				±0.3		MATERIAL NO.									
ANGULAR		±3 °				SEE CHART									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						SIZE									
						A3									

10 9 8 7 6 5 4 3 2 1

F


E

D


C

B

A

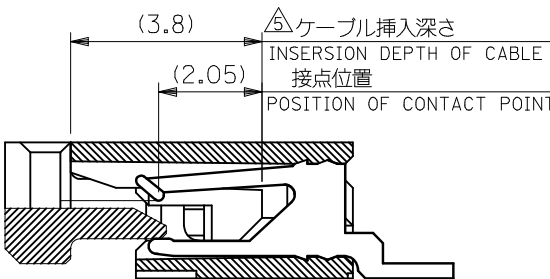




断面D-D
SECT.D-D

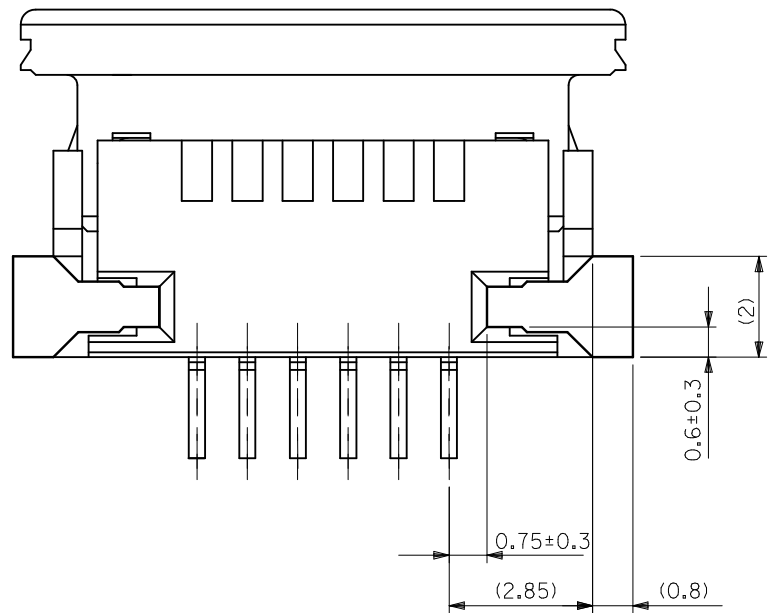

下面図
BOTTOM VIEW

REVISED EC NO: J2016-0429 D DRWN:SANUMA 2015/10/26 CHKD:KTAKAHASHI 2015/10/29 APPR:YNOGAWA 2015/11/13	DESCRIPTION D	REV	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
			0.25 UNDER	UNDER	±0.03	DRAWN BY	DATE	TITLE 1.0 FPC CONN ZIF SMT SHEET 2 OF 2					
			0.25 OVER	0.5 UNDER	±0.05	CHECKED BY	DATE						
			0.5 OVER	1.0 UNDER	±0.1	KTAKAHASHI	2013/07/24						
			1.0 OVER	10 UNDER	±0.2	APPROVED BY	DATE	DOCUMENT NO. molex SD-52207-071					
			10 OVER	30 UNDER	±0.25	YNOGAWA	2013/10/07						
			30 OVER		±0.3	MATERIAL NO.							
			ANGULAR ±3 °			SEE SHEET 1 OF 2			SHEET NO. 2 OF 2				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

9 8 7 6 5 4 3 2 1

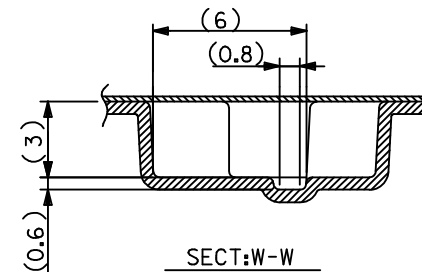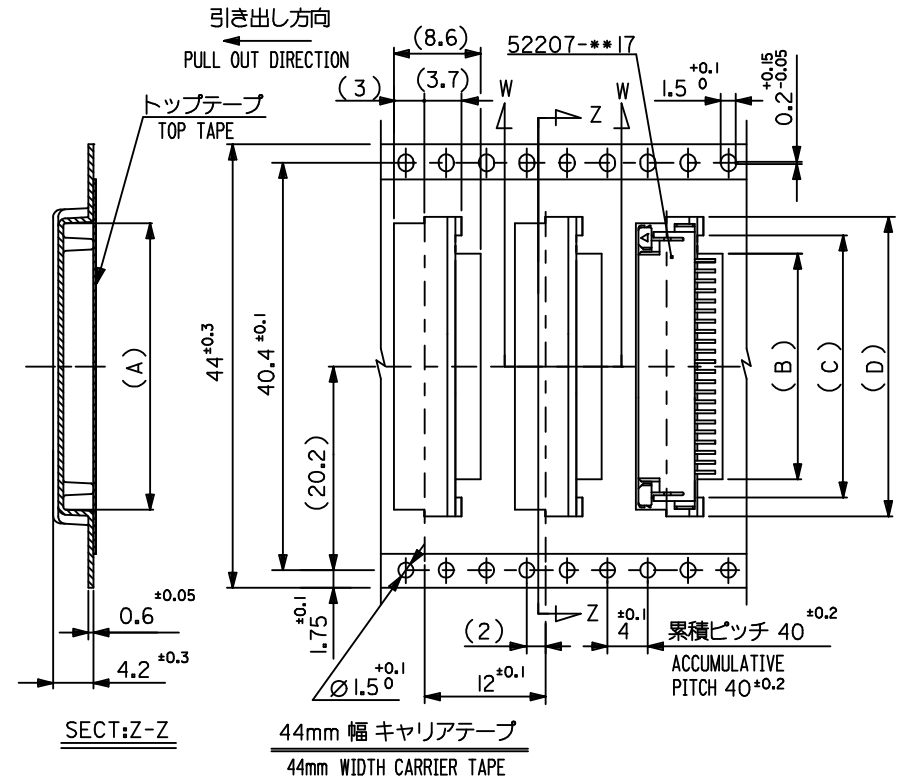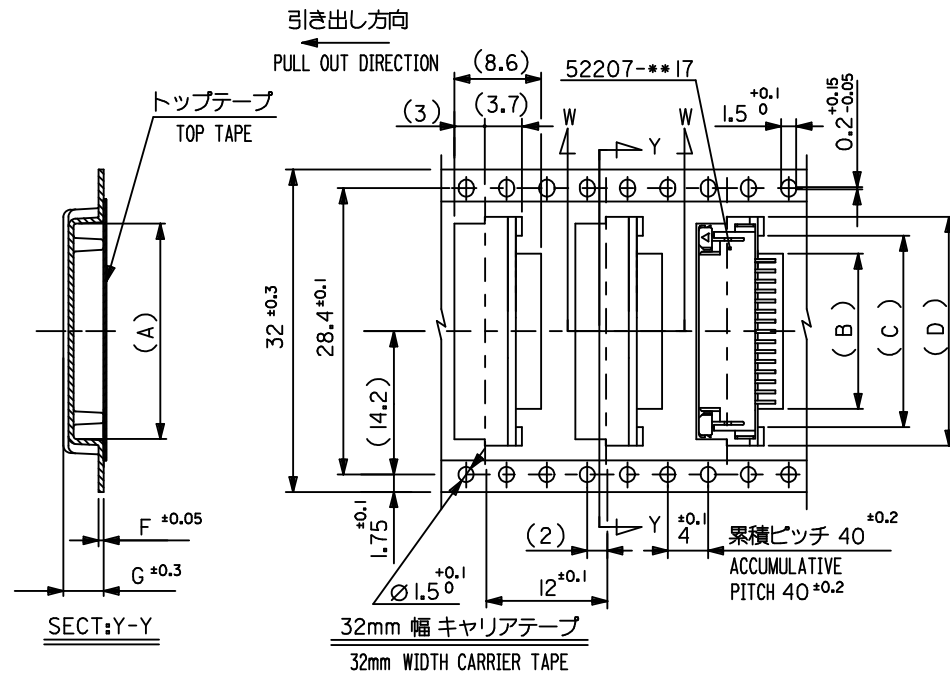

32	33.5	4.2	0.6	22.5	19	15.7	21.35	52207-1590	15
		4.2	0.6	21.5	18	14.7	20.35	52207-1490	14
キャリアテープ幅 CARRIER TAPE WIDTH	E	(G)	(F)	(D)	(C)	(B)	(A)	EMBOSSED PACKAGE ORDER NO.	極数 CKT.

44	45.5	32.5	29	25.7	31.35	52207-2590	25
		31.5	28	24.7	30.35	52207-2490	24
		29.5	26	22.7	28.35	52207-2290	22
		24.5	21	17.7	23.35	52207-1790	17
キャリアテープ幅 CARRIER TAPE WIDTH	E	(D)	(C)	(B)	(A)	EMBOSSED PACKAGE ORDER NO.	極数 CKT.

tb_frame_A3_J_ME_S
Rev H 2014/11/25

REVISED	EC NO: J2016-0429 DRWN: SANUMA 2015/10/26 CHKD: TAKAHASHI 2015/10/29 APPR: YNOGAWA 2015/11/13	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
			0.25 UNDER	UNDER	±0.03	DRAWN BY	DATE	TITLE EMBOSSED TAPE PACKAGE FOR 52207-**17 SHEET 2 OF 3 molex			
			0.25 OVER	0.5 UNDER	±0.05	MTAKAHASHI	04 2013/07/24				
			0.5 OVER	1.0 UNDER	±0.1	CHECKED BY	DATE	MATERIAL NO. SEE CHART			
			1.0 OVER	10 UNDER	±0.2	KTAKAHASHI	2013/07/24				
			10 OVER	30 UNDER	±0.25	APPROVED BY	DATE	DOCUMENT NO. SD-52207-072			
			30 OVER		±0.3	YNOGAWA	2013/10/07				
D		REV	ANGULAR ±3 °			SHEET NO. 2 OF 3					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

10

9

8

7

6

5




4

3


2

1

引き出し方向
PULL OUT
DIRECTION



DETAIL "F"

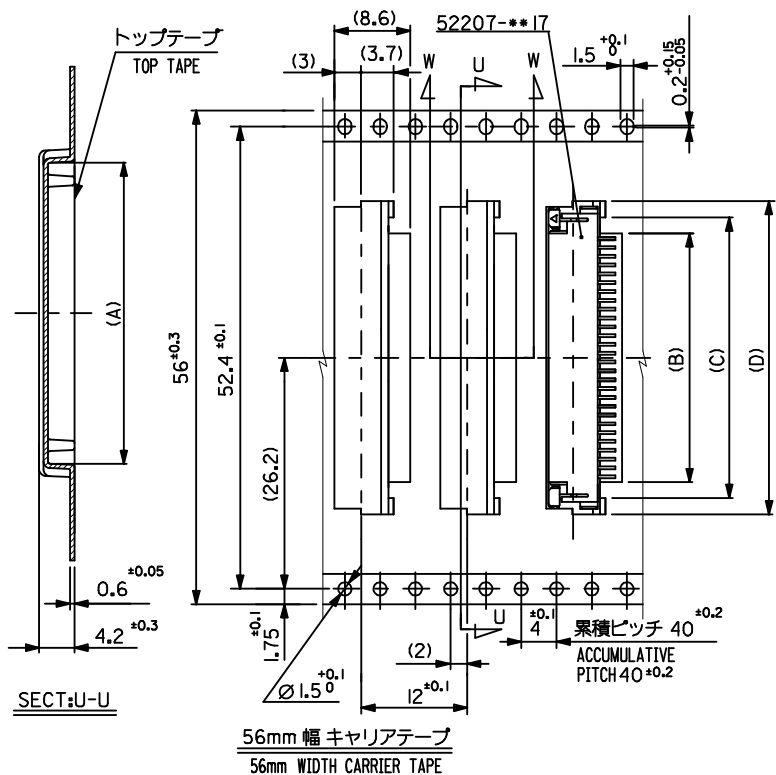


注記

1. 製品番号 52207-***17 の梱包状態はアクチュエータがロックした状態とする。
詳細寸法については図面 SD-52207-071 を参照下さい。
IN THE PACKAGE, ACTUATOR OF PART NO. 52207-***17 SHOULD BE LOCKED
RE DETAILED DIMENSIONS, SEE SD-52207-071


2. 梱包数量 : 1000個/リール
NUMBER OF CONNECTORS : 1000PCS/REEL

3. リードテープ長さ(LEAD TAPE LENGTH)

トップテープ TOP TAPE
リーダー部 LEADER PART
部品挿入部 COMPONENT
未接着部 NON-BONDED PART
末端部 (空部) TAIL PART (EMPTY)

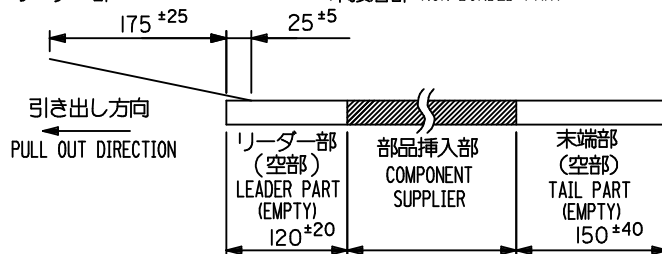

4. トップテープの剥離強度 : (剥離方向は下図参照)
60gf MAX. 尚、本規格値は、出荷時に適用。(但し、輸送時に剥離が発生しない事。)
PEELING OFF FORCE OF TOP TAPE : 60gf MAX. (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT. (PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.)



5. 材料 (MATERIAL)

キャリアテープ (CARRIER TAPE) : ポリプロピレン (POLYPROPYLENE)

トップテープ (TOPTAPE) : PET, PE, PEF

リール (REEL) : ポリスチレン (PS) <リサイクル材を含む>

POLYSTYREN (PS) <RECYCLE MATERIAL CONTAINED>

56	57.5	37.5	34	30.7	36.35	52207-3090	30
		35.5	32	28.7	34.35	52207-2890	28
キャリアテープ幅 CARRIER TAPE WIDTH	E	(D)	(C)	(B)	(A)	EMBOSSED PACKAGE ORDER NO.	極致 CKT.

REVISED EC NO: J2016-0429 DRWN: SANUMA 2015/10/26 CHKD: TAKAHASHI 2015/10/29 APPR: YNOGAWA 2015/11/13	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		0.25 UNDER	UNDER	±0.03	DRAWN BY	DATE	TITLE EMBOSSED TAPE PACKAGE FOR 52207-**17 SHEET 3 OF 3 molex				
		0.25 OVER	0.5 UNDER	±0.05	MTAKAHASHI	2013/07/24					
		0.5 OVER	1.0 UNDER	±0.1	CHECKED BY	DATE					
		1.0 OVER	10 UNDER	±0.2	KTAKAHASHI	2013/07/24	DOCUMENT NO. SD-52207-072 SHEET NO. 3 OF 3				
		10 OVER	30 UNDER	±0.25	APPROVED BY	DATE					
		30 OVER		±0.3	YNOGAWA	2013/10/07					
		ANGULAR ±3 °			MATERIAL NO.						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART						
		D	REV				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			