


Item # AL-52 /, Tpcm™ AL-52 Phase Change Material

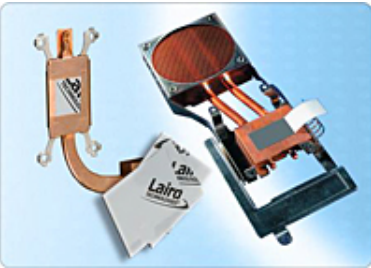

Tpcm™ AL-52 Phase Change Material

Stock Locator

Tpcm™ AI-52 is a thermally conductive phase change material coated on both side of aluminum foil. At temperature greater than 52°C, Tpcm™ AI-52 changes into a molten state and, Under low closure force, wets the heat sink and component surface to create a very thin thermal resistance interface. Tpcm™ AI-52 has great heat spreading characteristics and won't flow from the interface. Tpcm™ AI-52 has superior thermal performance comparable to the highest performing grease and phase change products available. Tpcm™ AI-52 is easy to handle and is a great replacement for messy grease. Tpcm™ AI-52 is available as individual die cut parts, kiss cut parts on rolls or sheet and uncut rolls. Tpcm™ AI-52 is available with or without adhesive.

SPECIFICATIONS

Color	Gray
Thickness	0.076 mm 0.003 in
Standard Coating Thickness per side	0.0005 in 0.013 mm
Density	2.1 g/cc
Shelf Life	Indefinite
UL Flammability Rating	94 V0
Max. Use Temperature	200 °C
Phase Change Softening Temperature	52 °C
Thermal Impedance at 5 psi	0.03 °C-in ² /W
Thermal Impedance at 34.5Kpa	0.193 °C-cm ² /W