



DESCRIPTION:

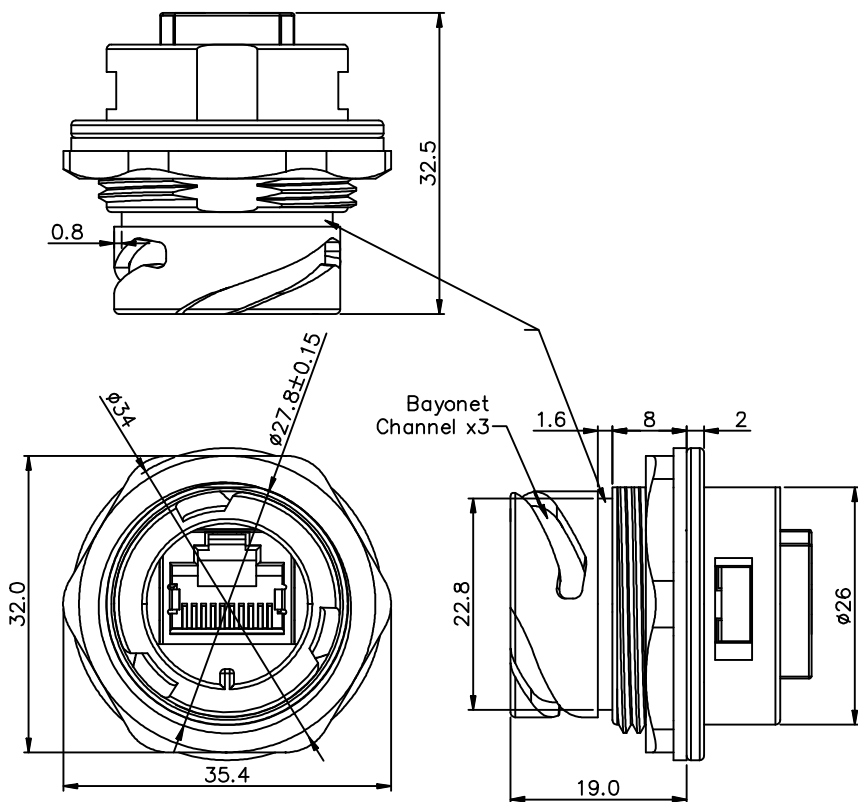

Panel Cut-Out

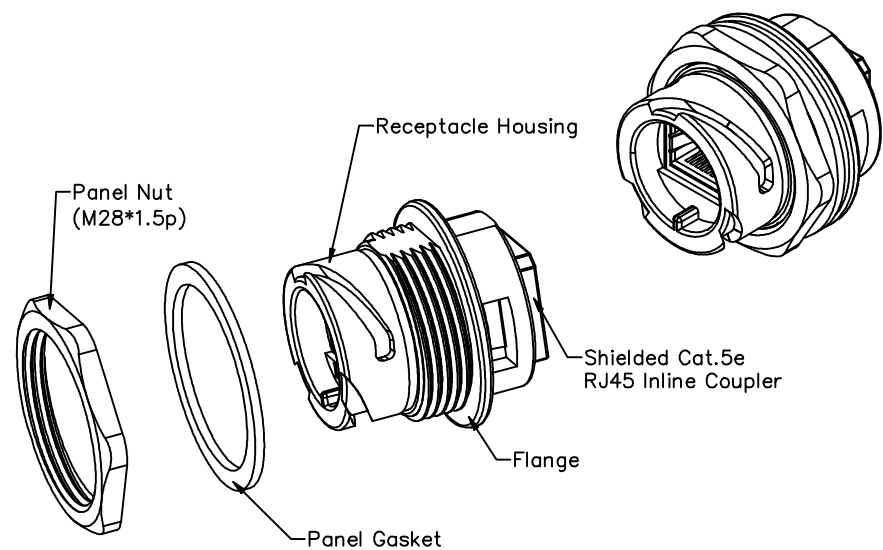

Electrical Specifications:

Meets EIA/TIA-568-B.2 Cat.5e Specification
Contact Resistance: 20 mOhm max
Insulation Resistance: 500 MOhm min @100V DC
Current Rating: 1.5A max
Voltage Rating: 100VDC
DWV: 1000V DC/60s min Contact to Contact, 1500V DC/60s Contact to Metal Shell
Operating Temperature: -40°C TO +85°C

Material and Finish

Receptacle Housing: Zn Alloy 3,Nickel Plated
Panel Nut: Copper Alloy,Nickel Plated
Panel Gasket: Silicone
RJ45 Jack Metal Shell: Copper Alloy,Nickel Plated
RJ45 Jack Plastic Housing: Engineering Thermoplastic Flammability Rating UL94 V-0
RJ45 Jack Contact: Phosphor Bronze,finish: 50u" Gold over Nickel
Color: Black
Connector can be front mounted to a maximum panel thickness of 3.2mm.

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

05-10-13

CHECKED:

DATE:

SCALE:

N.T.S.

SHEET

1

OF

1

REV

2

DWG NO.

IPRJCONN-M

RoHS COMPLIANT

NorComp