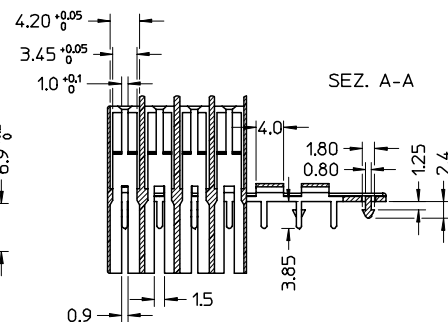

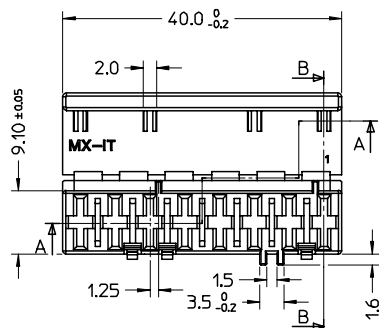


P/N	MATERIAL/COLOR
94535-7008	NYLON 6.6 V2 NATURAL
94535-4008	NYLON 6.6 GWT 750 °C sec IEC 60335-1 TEST METHOD IEC 60695-2-11 NATURAL

IMBALLO: BOX CON SACCHETTO DI NYLON

PACKAGING: BOX WITH PLASTIC BAG

SPQ: 2000 pz.

Std. Descr: *HOUSING W/SEC LOCK 8 CKT*

ENTER DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	FIRST ANGLE PROJECTION	
EC NO: Z2006-0163		DRAWN BY: GOTIARD		mm		MM ONLY			METRIC		
2006/03/30		CHECKED BY: RSANDANO		INCH		DRAWN BY: GOTIARD		DATE: 1999/07/28		TITLE: HOUSING 8 CKT RAST 5	
2006/03/30		APPROVED BY: GUIN		4 PLACES ± ---		CHECKED BY: MTESTAGUZZA		DATE: 1999/07/28			
2006/04/03				3 PLACES ± ---		APPROVED BY: RMARTUCCI		DATE: 1999/07/28			
				2 PLACES ± 0.1		MATERIAL NO.		DOCUMENT NO.		MOLEX INCORPORATED	
				1 PLACE ± 0.2		SIZE		SD-94535-007		SHEET NO.	
				ANGULAR ± 2 °		A2				1 OF 1	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							