

Solid State Relays SOLITRON POWER - With Integrated Heatsink Types RJ1A, RJ1B

CARLO GAVAZZI



- AC semiconductor contactor
- Zero switching (RJ1A) or instant-on switching (RJ1B)
- Direct copper bonding (DCB) technology
- LED-indication
- Cage clamp terminals
- 2 input ranges: 4-32 VDC and 24-275 VAC/24-48 VDC
- Operational ratings up to 90 AACrms and 600 VAC¹
- Blocking voltage: Up to 1200 V_p
- Opto-isolation > 4000 VACrms
- Over-temperature safety option²
- Integrated fan option
- Option for UL508 listing⁵

Product Description

The SOLITRON Power is a single-phase Solid State Contactor designed to replace electro-mechanical contactors in industrial heating and motor applications. This product can cope with frequent switching of high current loads. The product is ready to mount on DIN-rail or chassis and comes with integral heatsink. For current rating of 90 AACrms (AC51) convection cooling is used. The terminal layout

allows both contactor (E) and SSR (U) type connection. Cage clamp terminals are used to ensure secure load connection with cable up to 25mm².

An LED indicates the status of the control input. The superior heat-transfer efficiency combined with a robust power management system make this a high reliability product that can meet the most stringent functional requirements.

Ordering Key RJ 1 A 60 D 90 E P V M

Solid State Relay	_____
Number of poles	_____
Switching mode	_____
Rated operational voltage	_____
Control voltage	_____
Rated operational current	_____
Terminal layout	_____
Overtemp. protection	_____
Varistor	_____
UL listed option	_____

Type Selection

Switching mode	Rated operational voltage ¹	Control voltage	Rated operational current	Terminal layout	Options
A: Zero switching B: Instant-on switching ³	23: 230 VACrms 60: 600 VACrms	D: 4-32 VDC A: 24-275 VAC/ 24-48 VDC	70: 70 AACrms 90: 90 AACrms ⁴	U: SSR E: Contactor	P: Over-temp. protection ² V: Integrated Varistor M: UL listed

Selection Guide

Rated operational voltage	Blocking voltage	Control voltage	Rated operational current 70 A	90 A(FAN+OTP) ²
230 VACrms	650 V _p	4 - 32 VDC	RJ1A23D70E RJ1A23D70U	RJ1A23D90EP
		24 - 275 VAC / 24 - 48 VDC	RJ1A23A70E RJ1A23A70U	RJ1A23A90EP
600 VACrms	1200 V _p	4 - 32 VDC	RJ1A60D70E RJ1A60D70U	RJ1A60D90EP
		24 - 275 VAC / 24 - 48 VDC	RJ1A60A70E RJ1A60A70U	RJ1A60A90EP

Notes

- 1 690 VACrms rated operational voltage available on request. Example: RJ1A69D70U
- 2 "P" suffix: Over-temperature protection (OTP), available with type "E" terminals only
- 3 Instant On versions not available with AC control voltage
- 4 With integrated fan and over-temperature protection - fan will automatically switch on when necessary
- 5 "M" suffix available only on request. Product ending with "M" is UL listed with NMFT/ NMFT7 requirements for motor loads.

Motor ratings (UL508)

Part number	110-120VAC		220-240VAC		440-480VAC		550-660VAC	
	HP	FLA	HP	FLA	HP	FLA	HP	FLA
RJ1.23..70..M	1 1/2	20.0A	3	17.0A	-	-	-	-
RJ1.60..70..M	1 1/2	20.0A	3	17.0A	5	14.0A	10	20.0A
RJ1.23..90..M	1 1/2	20.0A	3	17.0A	-	-	-	-
RJ1.60..90..M	1 1/2	20.0A	3	17.0A	5	14.0A	10	20.0A


General Specifications

	RJ1.23..	RJ1.60..
Operational voltage range	24 to 265 VAC	42 to 660 VAC
Blocking voltage	650 V _p	1200 V _p
Operational frequency range	45 to 65 Hz	45 to 65 Hz
Power factor	≥ 0.5 @ 230 VACrms	≥ 0.5 @ 600 VACrms
Integrated Varistor (RJ1.....V)	275V	680V
Over-temperature alarm		
I _{max}	50mADC	50mADC
U _{max}	50VDC	50VDC

Input Specifications

	RJ1A...D	RJ1B...D	RJ1A...A
Control voltage range	4-32 VDC	4.5-32 VDC	24-275 VAC/24-48 VDC
Pick-up voltage	3.8 VDC	4.25 VDC	22 VAC/DC
Reverse voltage	32 VDC	32 VDC	n/a
Drop-out voltage	1.2 VDC	1.0 VDC	6 VAC/DC
Maximum Input current	12 mA	15 mA	17 mA
Response time pick-up	1/2 cycle	1 ms	1 cycle
Response time drop-out	1/2 cycle	1 cycle	1 cycle

Dissipation Curve

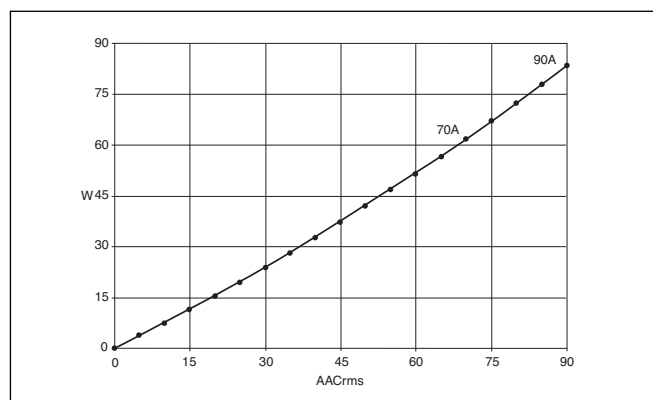

Isolation

Rated isolation voltage	
Input to output	≥ 4000 VACrms
Output to case	≥ 4000 VACrms


Output Specifications

	RJ...70	RJ...90 (With integrated fan)
Rated operational current AC51 @Ta=25°C AC53a @Ta=25°C	70 AACrms 30 AACrms	90 AACrms 30 AACrms
Min. operational current	500 mAACrms	500mAACrms
Rep. overload current t = 1s	< 200 AACrms	<200 AACrms
Non rep. surge current Tj(init.) = 25°C and t = 10 ms	1900 A _p	1900 A _p
Off-state leakage current @ rated voltage and frequency	< 3 mArms	< 3 mArms
I ² t for fusing t = 10 ms	18000 A ² s	18000 A ² s
On-state voltage drop @ rated current	1.6 Vrms	1.6 Vrms
Critical dV/dt off-state	500 V/μs	500 V/μs


Thermal Specifications

	RJ...D	RJ...A
Operating temperature	-30 to +70°C (-22 to +158°F)	-30 to +70°C (-22 to +158°F)
Storage temperature	-40 to +100°C (-40 to 176°F)	-40 to +100°C (-40 to 176°F)

Terminal Layout

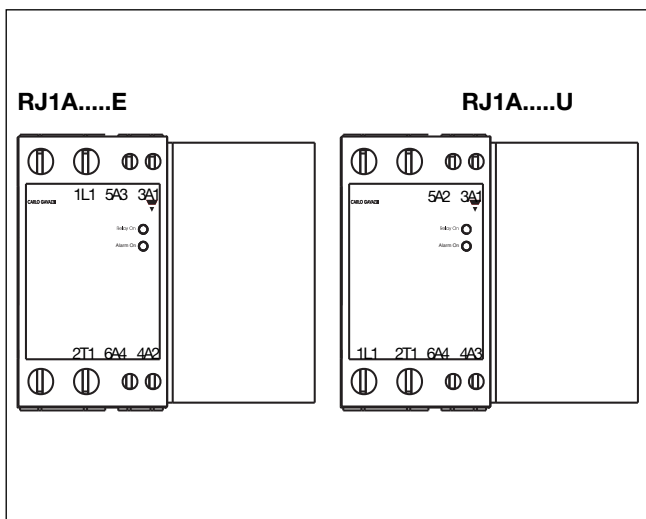

Dimensions


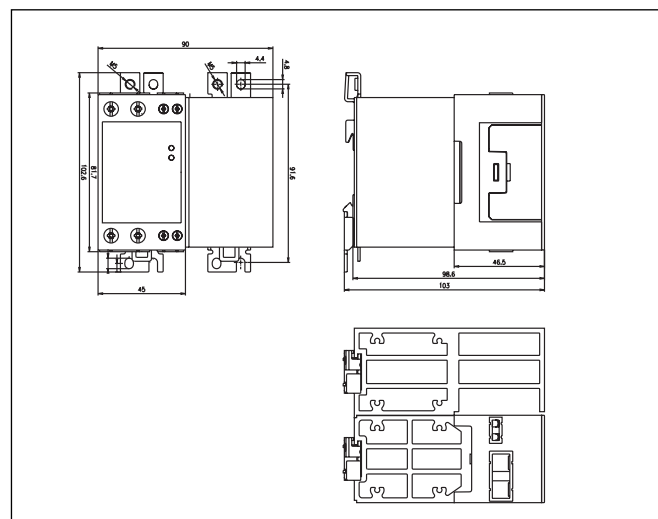


All dimensions in mm


Housing Specifications

Weight				Mounting torque max.	0.6 Nm with Pozidriv 0 bit
RJ Power		Approx. 430 g		Control terminal screws	M3
RJ Power w. fan		Approx. 460 g		Power terminal cable size	
Housing material		PBT, Flame retardant		IEC data	Min Max
Control Terminal A1, A2				UL data	Min Max
Cable size				Mounting torque max.	2.5 Nm with Pozidriv 2 bit
IEC data	Min	1 x 0.5 mm ² (1 x AWG20)		Power terminal screws	M5
	Max	1 x 4.0 mm ² (1 x AWG12) or 2 x 2.5 mm ² (2 x AWG14)			
UL data	Min	1 x AWG 20 (Stranded & Solid)			
	Max	1 x AWG 12 (Stranded & Solid) 2 x AWG 14 (Stranded & Solid)			

Derating vs Spacing Curves

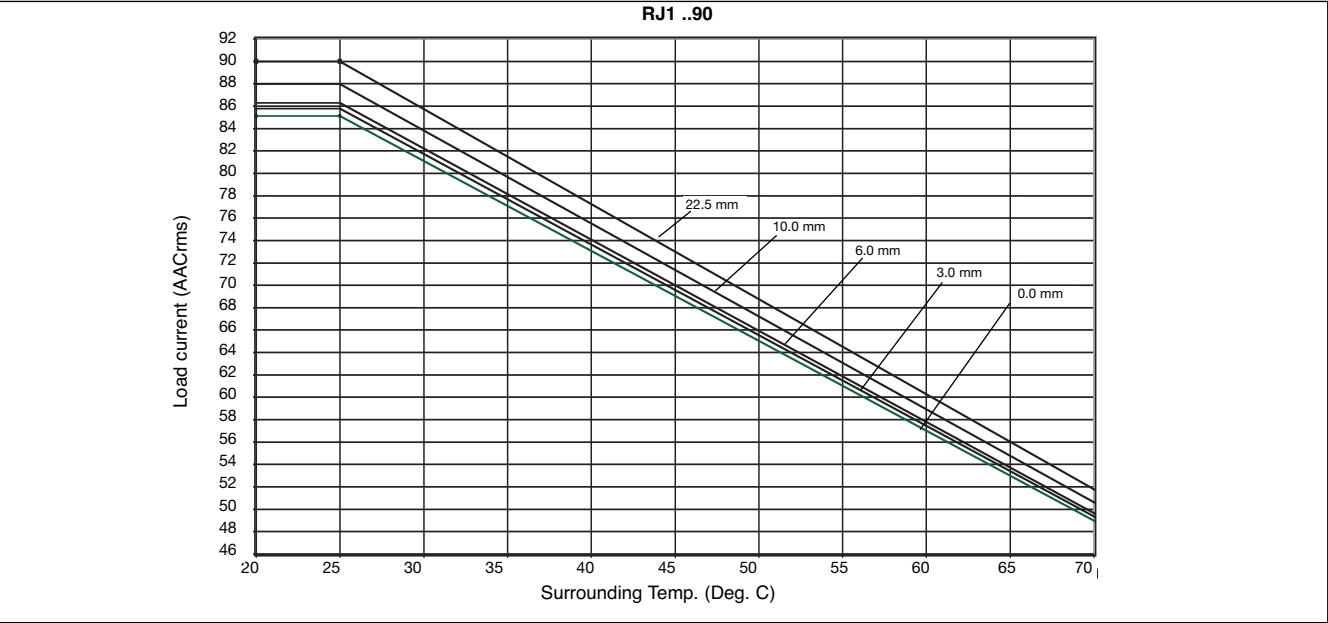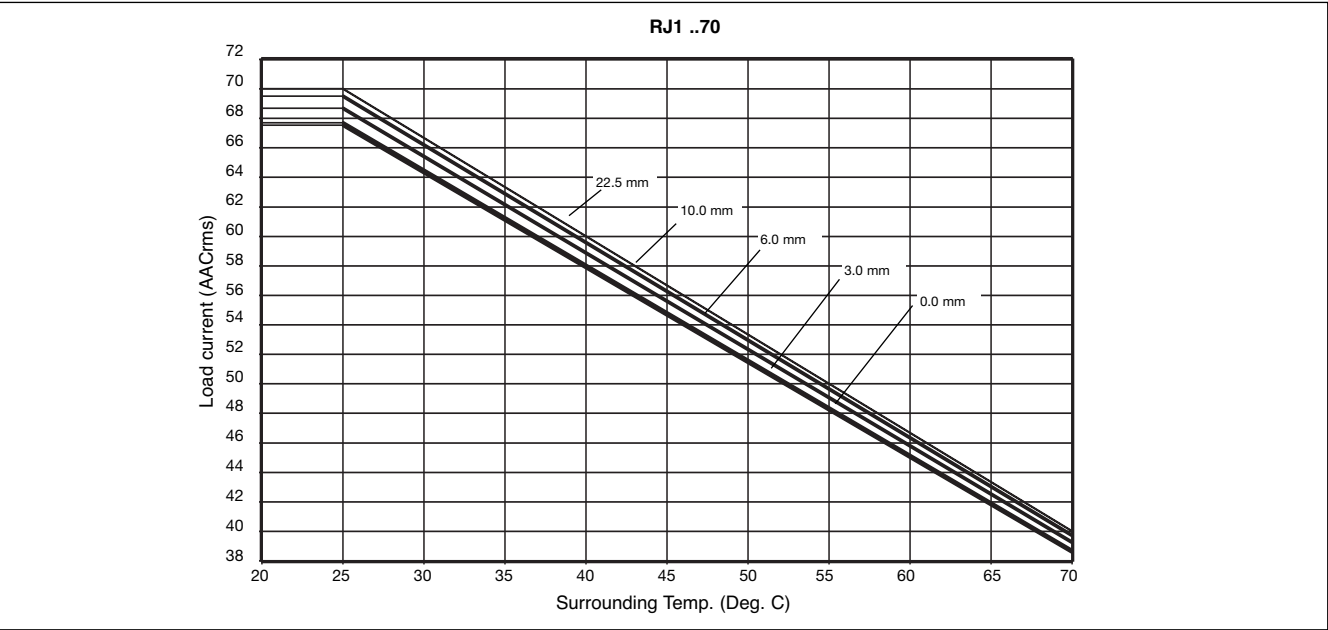


Over-temperature Protection (Option: ...P)

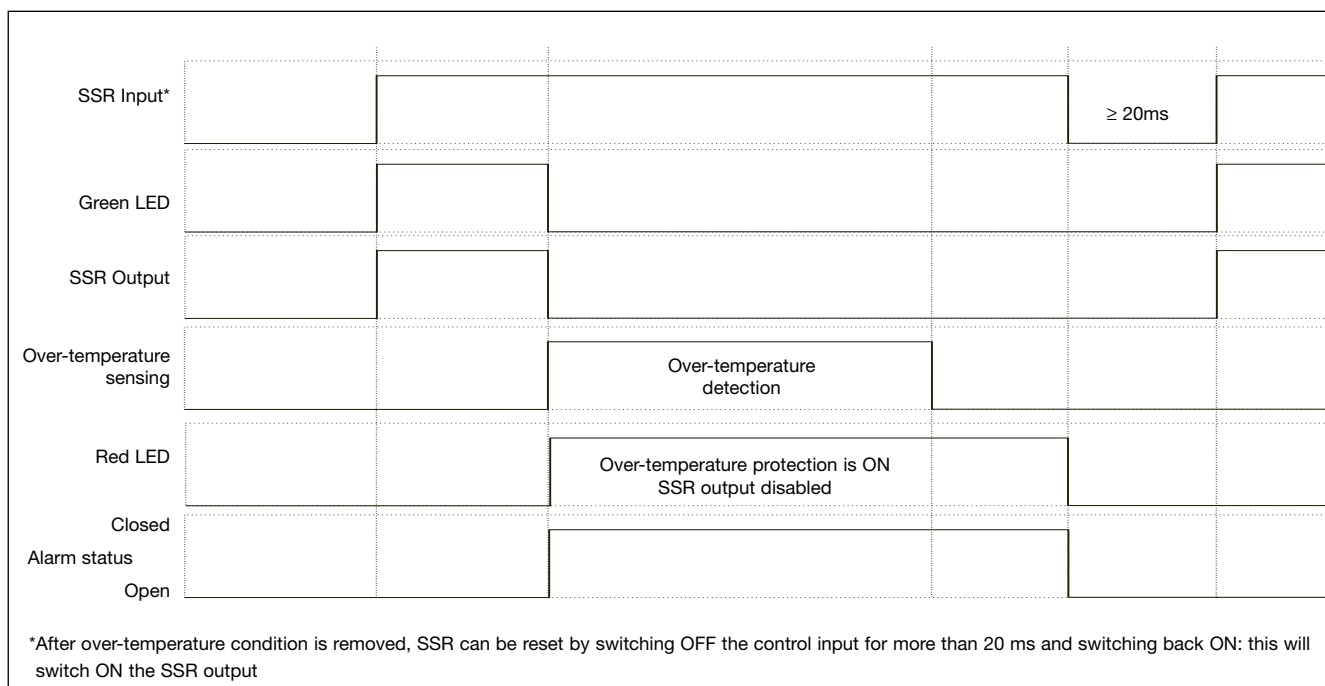


Applications


Two single pole relays in
3-phase application
Delta and star.
(Economy Switch)

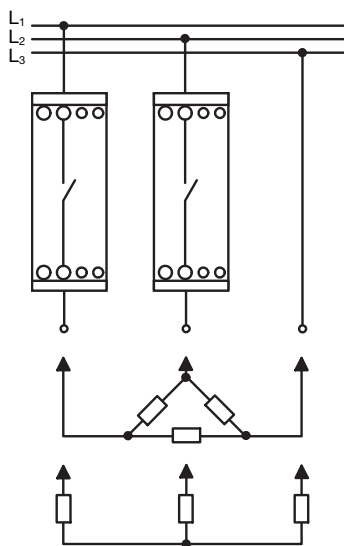

3 single pole relays in
3-phase application
Delta, Star, Star with neutral

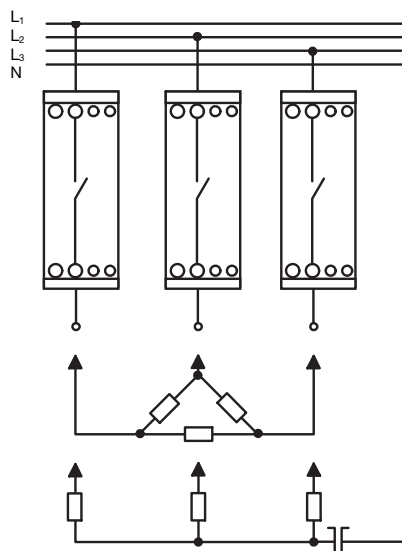

Connection Examples

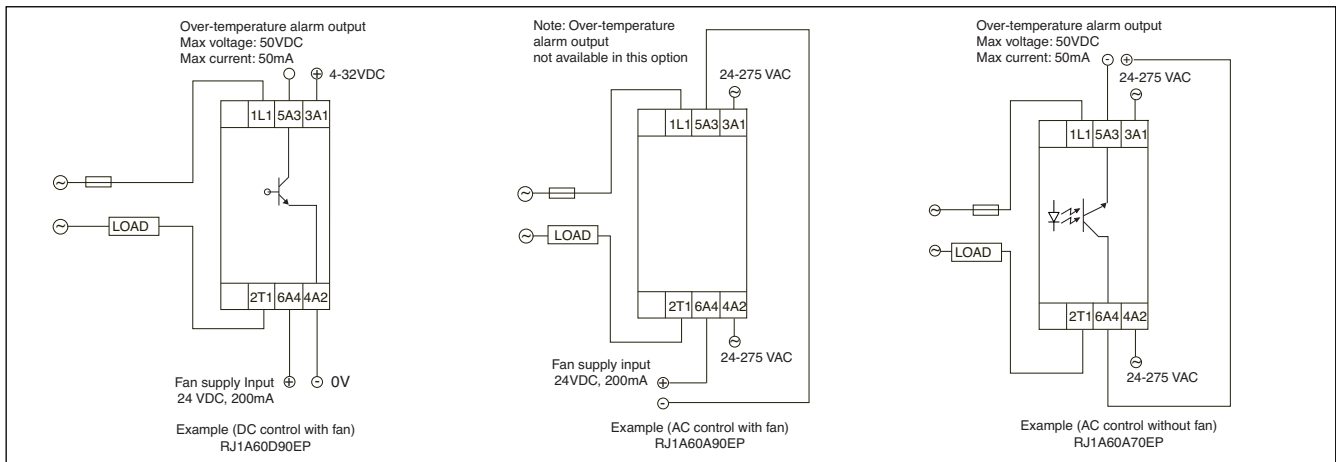

Agency Approvals & EMC

CE marking		Approvals	cURus, CSA
Low Voltage Directive	IEC / EN 60947-4-3	Restrictions of hazardous substances	RoHS
EMC Immunity	IEC / EN 61000-6-3		
EMC Emission	IEC / EN 61000-6-1	Radiated Radio Frequency Immunity	EN 61000-4-3
Electrostatic Discharge (ESD) Immunity	IEC / EN 61000-4-2 8kV, PC2 Air discharge 4kV, PC2 Contact	10V/m, 80 - 1000 Mhz	Performance criteria 1
Electrical Fast Transient Burst Immunity	IEC / EN 61000-4-4 2kV, performance criteria 1 1kV, performance criteria 1	Conducted Radio Frequency Immunity	IEC / EN 61000-4-6
Output		10V/m, 0.15 - 80 MHz	Performance criteria 1
Input		Voltage Dips Immunity	IEC / EN 61000-4-11
Electrical Surge Immunity	IEC / EN 61000-4-5	0% for 10ms/20ms, 70% for 500ms	Performance criteria 2
Output, line to line	1kV, performance criteria 2	40% for 200ms	Performance criteria 3
Output, line to earth	2kV, performance criteria 2	Voltage Interruptions Immunity	IEC / EN 61000-4-11
Input, line to line	1kV, performance criteria 2	0% for 5000ms	Performance criteria 3
Input, line to earth	2kV, performance criteria 2	Radio Interference voltage emissions (conducted)	IEC / EN 55011
Radio Interference field emissions (radiated)	IEC / EN 55011 Class B (light industry)		Class A (industrial)

Protection with Semiconductor Fuses

Relay type	Rated oper. voltage	Max. fuse	Fuse Size Ferraz (mm)	Fuse type Ferraz	Fuseholder Ferraz	Fuse Size Siba (mm)	Fuse type Siba	Fuseholder Siba
70A 22 I ² t = 18000A ² s	230 VAC 600 VAC	63 A 63 A	22 x 58 22 x 58	6.9xx CP gRC 22 x 58/63 6.9xx CP gRC 22 x 58/63	CMS221P CMS22 1P	22 x 58 22 x 58	50 140 34.63 50 140 34.63	51 060 04 51 060 04
90A 22 I ² t = 18000A ² s	230 VAC 600 VAC	80 A 80 A	22 x 58 22 x 58	6.9xx CP gRC 22 x 58/80 6.9xx CP gRC 22 x 58/80	CMS22 1P CMS22 1P	22x58 22x58	50 140 34.80 50 140 34.80	51 060 04 51 060 04

Protection for 65kArms Short Circuit Current Rating (according to UL508)

Suitable for use on a circuit capable of delivering not more than 65,000 Arms symmetrical amperes, 600 volts maximum when protected by Class J fuses. The maximum allowed current value of the fuses is reported in the table below.

Use fuses only

Type	Maximum allowed ampere rating of the fuse
RJ1yxxx70	90A
RJ1yxxx90	90A

Protection with Circuit Breakers (ABB)

Solid State Relay type	Model no. for Z - type M. C. B. (rated current)	Model no. for B - type M. C. B. (rated current)	Wire cross sectional area [mm ²]	Minimum length of Cu wire conductor [m] ¹
RJ 70, RJ 90	S201 - Z50 (50A)	S201-B25 (25A)	4.0	4.8
			6.0	7.2
			10.0	12.0
			16.0	19.2
	S201 - Z63 (63A)	S201-B32 (32A)	6.0	7.2
			10.0	12.0
			16.0	19.2

1. between MCB and SSR Relay (including return path which goes back to the mains).

Note: A prospective current of 6kA and a 230/400V power supply system is assumed for the above suggested specifications. For cables with different cross section than those mentioned above please consult Carlo Gavazzi's Technical Support Group.