
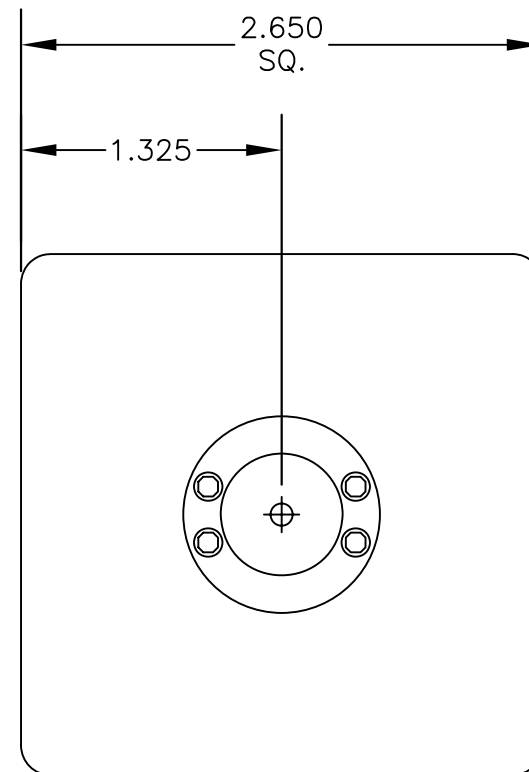


MATERIALS

CONNECTOR (F)	PASSIVATED STAINLESS STEEL
CONNECTOR (M)	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
HEAT SINK	ANODIZED ALUMINUM

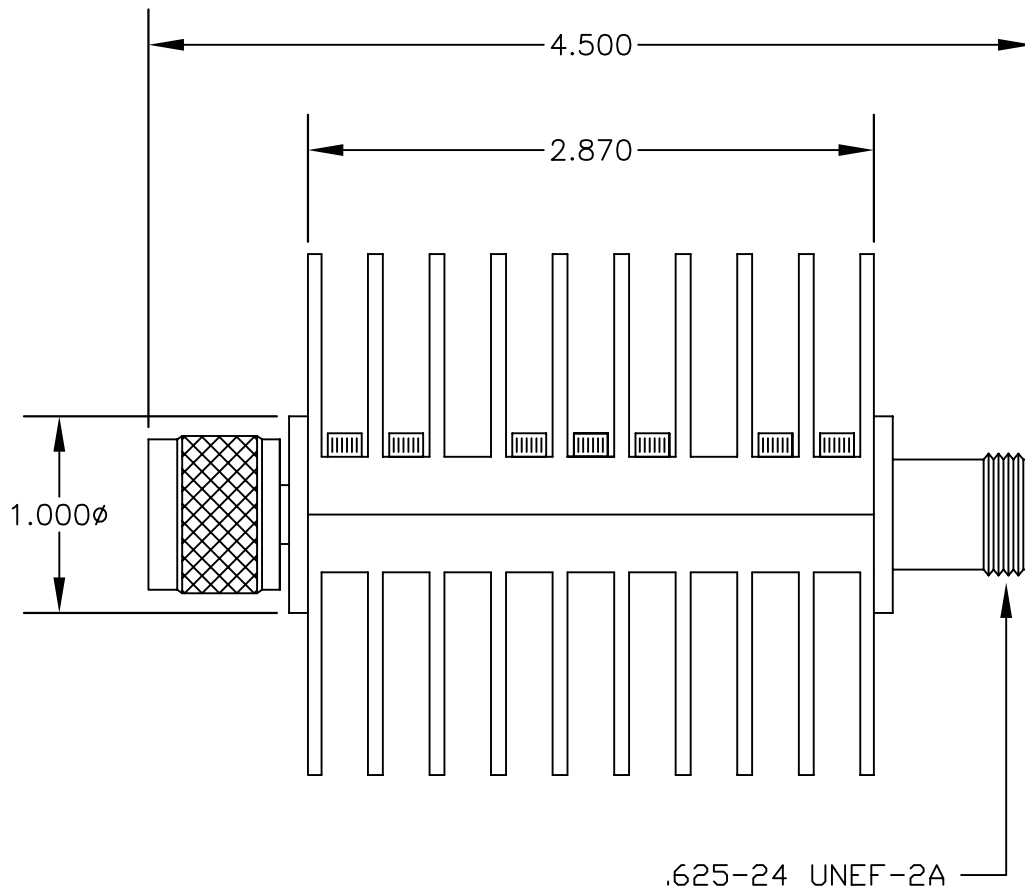

SPECIFICATIONS

FREQUENCY RANGE: DC TO 18 GHz
 ATTENUATION: 30 dB
 IMPEDANCE: 50 OHMS
 ACCURACY: ± 2.0 dB
 VSWR:

DC - 6 GHz 1.20:1 MAX
 6 GHz - 12.4 GHz 1.30:1 MAX
 12.4 GHz - 18 GHz 1.40:1 MAX

AVG. POWER HANDLING CAPABILITY: 25 WATTS



PASTERNAK ENTERPRISES, INC.

P.O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE

PE7017-30

DES.

N ATTENUATOR, 25 WATT, FREQUENCY
 RANGE: DC TO 18 GHz

SIZE A

FSCM NO. 53919

CAD FILE

080602

SCALE N/A

127

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.