
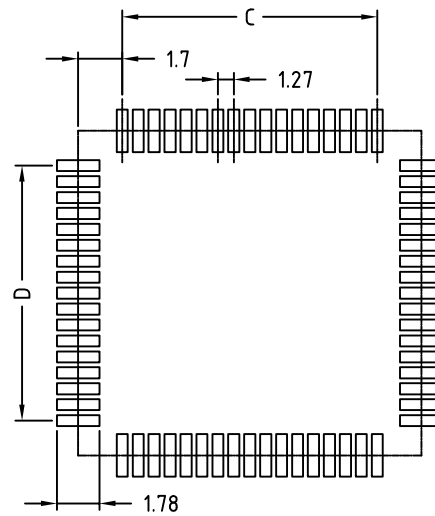
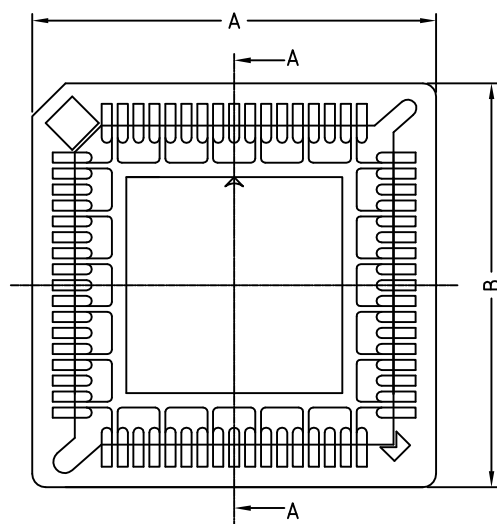


NO. OF CONTACT	A±0.3	B±0.3	C±0.3	D±0.3	E±0.3
20	15.24	15.24	5.08	5.08	16.70
28	17.78	17.78	7.62	7.62	20.30
52	25.74	25.74	15.24	15.24	31.13
68	30.82	30.82	20.32	20.32	38.31
84	35.90	35.90	25.40	25.40	45.50

RECOMMENDED P.C.B PAD LAYOUT

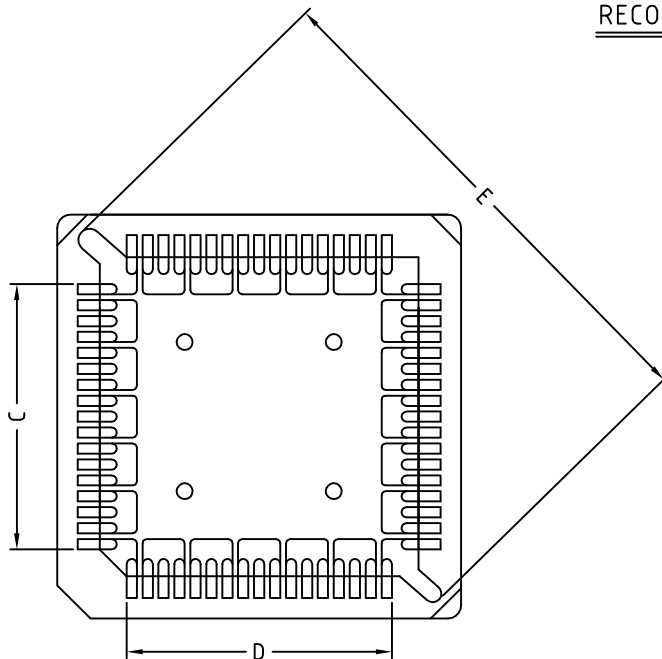

Insulator Material: PPS&40% Glass Fiber(UL94V-0)
 Contact Resistance: 30MO Max. at DC 100mA
 Insulator Resistance: 1000MO Min at DC 500V
 Current Rating: 1AMP
 Dielectric withstanding voltage: AC 500V for 1 minute
 Temperature Rating: -55°C ~ +105°C
 Contact Material: Phosphor Bronze

RoHS Compliant



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		PLCC Socket - 1.27mm pitch, SMT, non-polarized, tube packaging					
PART NO.		EDO-XXPLCZ-SM-N		DWG NO.		EDO-XXPLCZ-SM-N.DWG	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.	1200	
Helen 2012.05.22	Helen 2012.05.22	Helen 2012.05.22	Helen 2012.05.22			UNIT: mm	
						SCALE: NONE	
				SHEET: 01/01		REV.: A	