


Technical drawing of a 100mm wide, 19.0mm thick extruded aluminum profile. The profile features a series of rectangular slots and circular holes. Dimensions are provided in inches and millimeters.


Key dimensions shown:

- Total width: 5.13 [130.3]
- Slot width: 2.50 [63.5] (REF)
- Hole diameter: 1.25 [31.8] (TYP REF)
- Thickness: .75 [19.0]

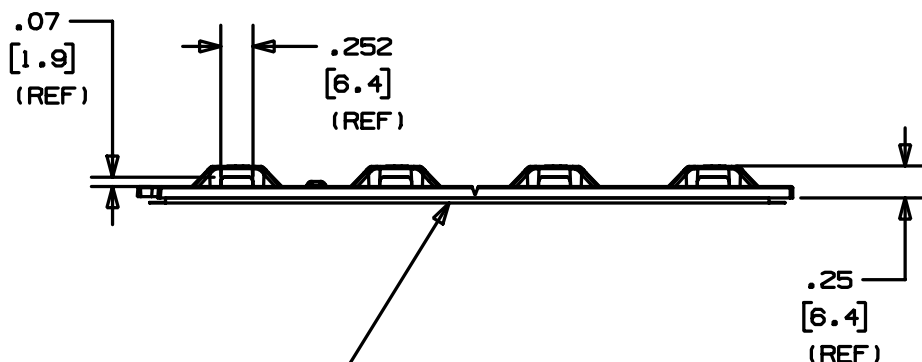

PANDUIT PART NO.	MOUNTING OPTIONS	WEIGHT lbs 10 (g) pcs
ABMQS-___-----	A - RUBBER ADHESIVE AT - ACRYLIC ADHESIVE S6 - SCREW APPLIED	0.13 (58.97)

S STANDARD
 I INTERMEDIATE
 M MINATURE
 R GRIP CABLE TIES
 SG200
 SG250
 SG300

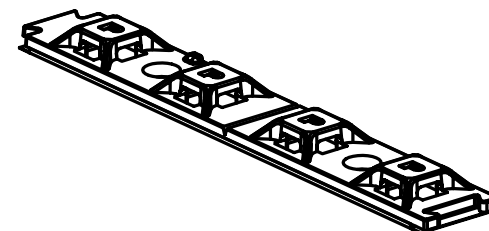

PANDUIT

DWG
A
SIZE

[illegible]

DRAWN BY	JAD	MAT'L: ABS	SCALE NONE	
DATE	2/28/05		DRAWING NO.	QMS
CHK'D			GB2722DC	A SIZE