

SDC8UL7284-(67/84/100/125)T-S

64MByte (8M x 72) CMOS

Synchronous DRAM Module

General Description

The SDC8UL7284-(67/84/100/125)T-S is a high performance, 64-megabyte synchronous, dynamic RAM module organized as 8M words by 72 bits, in a 168-pin, dual-in-line memory module (DIMM) package.

The module utilizes nine Fujitsu MB81164842A-(67/84/100/125)LFN CMOS 8Mx8 synchronous dynamic RAMs in surface mount package (TSOP) on an epoxy laminated substrate. Each device is accompanied by a decoupling capacitor for improved noise immunity.

A 256 Byte Serial EEPROM contains the module configuration information.

Features

- High Density 64MByte
- Cycle Time: 8ns (125MHz), 10ns (100MHz), 12ns (84MHz), 15ns (67MHz)
- Low Power: Active 6.6W (125MHz), 5.8W (100MHz), 5.3W (84MHz), 4.9W (67MHz)
- LVTTTL-compatible inputs and outputs
- Separate power and ground planes to improve noise immunity
- Single power supply of 3.3V±0.3V
- Height: 1.250 inch

ABSOLUTE MAXIMUM RATINGS


Item	Symbol	Ratings	Unit
Voltage on any pin relative to V _{SS}	V _T	-0.5 to +4.6	V
Power Dissipation	P _T	9.0	W
Operating Temperature	T _{opr}	0 to +70	°C
Storage Temperature	T _{stg}	-55 to +125	°C
Short Circuit Output Current	I _{OS}	±50	mA

RECOMMENDED DC OPERATING CONDITIONS

(T_A = 0 to +70 °C)



Symbol	Parameter	Min	Typ	Max	Unit
V _{CC}	Supply Voltage	3.0	3.3	3.6	V
V _{SS}	Ground	0	0	0	V
V _{IH}	Input High voltage	2.0	-	V _{CC} +0.5	V
V _{IL}	Input Low voltage	-0.5	-	0.8	V

Functional Diagram

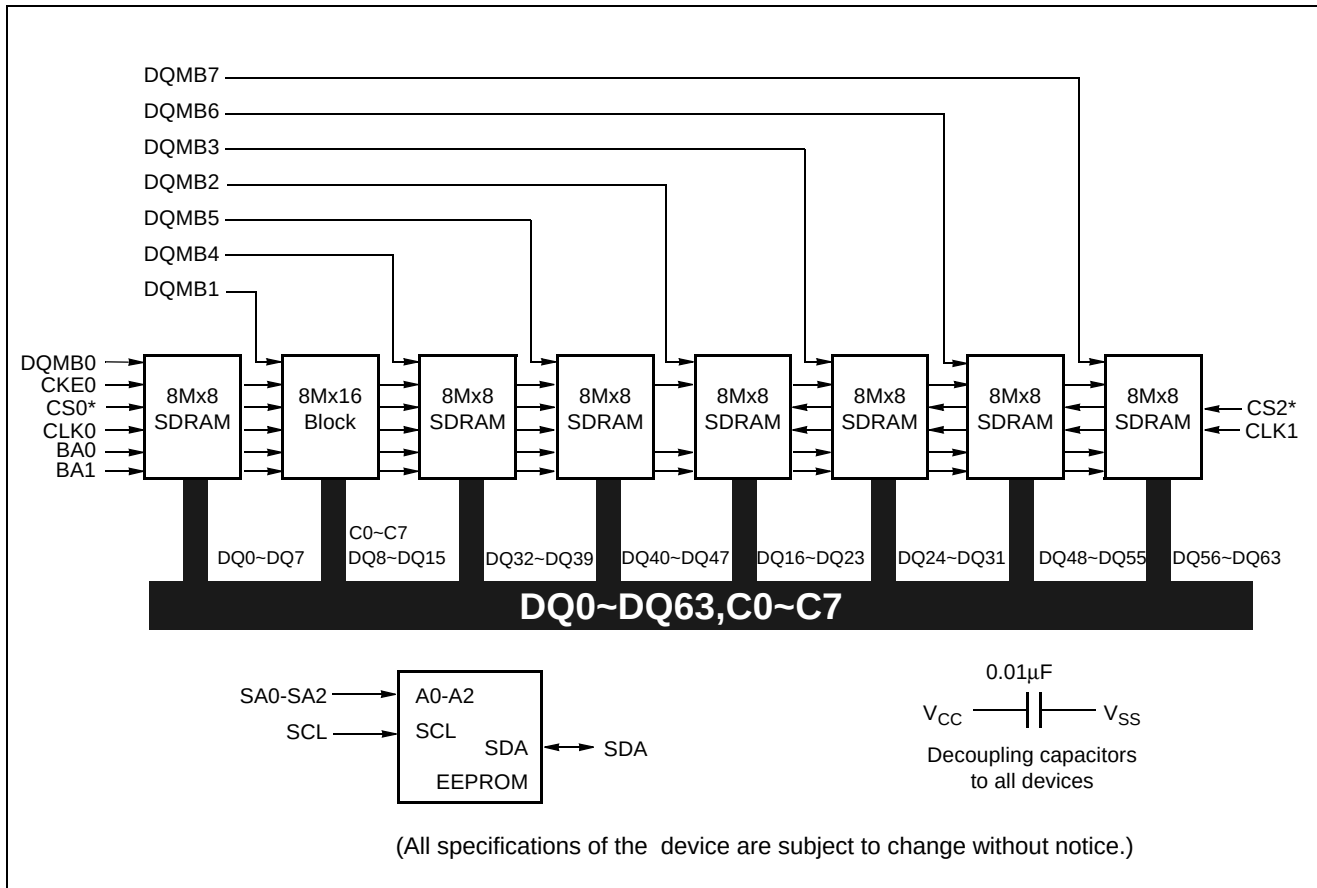


- Notes:
1. A0~A11 to all devices
 2. WE*, RAS*, CAS* to all devices.
 3. Data and CLKs are terminated using 10 ohm series resistors.
 4. 8Mx16 block comprises two 8Mx8 SDRAM devices.
 5. DQMs vs. Data I/Os
 - DQMB0 controls DQ0~DQ7
 - DQMB1 controls DQ8~DQ15, C0~C7
 - DQMB2 controls DQ16~DQ23
 - DQMB3 controls DQ24~DQ31
 - DQMB4 controls DQ32~DQ39
 - DQMB5 controls DQ40~DQ47
 - DQMB6 controls DQ48~DQ55
 - DQMB7 controls DQ56~DQ63

6. Clock Wiring

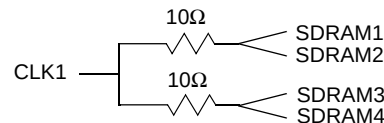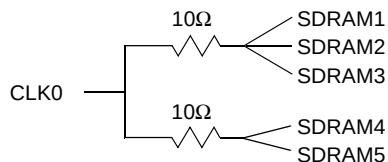

CLK1



SDC8UL7284-(67/84/100/125)T-S

Pin Name

A0~A11	Addresses	CS0*, CS2*	Chip Select
BA0, BA1	Bank Select Address	WE*	Write Enable
DQ0~DQ63, C0~C7	Data Inputs/Outputs	SA0~SA2	Decode Input
CLK0~CLK3	Clock Inputs	SCL	Serial Clock
RAS*	Row Address Strokes	SDA	Serial Data Input/Output
CAS*	Column Address Strokes	V _{CC}	Power Supply
CKE0	Clock Enables	V _{SS}	Ground
DQMB0-DQMB7	DQ Mask Enables	NC	No Connection

Pin No.	Pin Designation	Pin No.	Pin Designation	Pin No.	Pin Designation	Pin No.	Pin Designation
1	V _{SS}	43	V _{SS}	85	V _{SS}	127	V _{SS}
2	DQ0	44	NC	86	DQ32	128	CKE0
3	DQ1	45	CS2*	87	DQ33	129	NC
4	DQ2	46	DQMB2	88	DQ34	130	DQMB6
5	DQ3	47	DQMB3	89	DQ35	131	DQMB7
6	V _{CC}	48	NC	90	V _{CC}	132	NC
7	DQ4	49	V _{CC}	91	DQ36	133	V _{CC}
8	DQ5	50	NC	92	DQ37	134	NC
9	DQ6	51	NC	93	DQ38	135	NC
10	DQ7	52	C2	94	DQ39	136	C6
11	DQ8	53	C3	95	DQ40	137	C7
12	V _{SS}	54	V _{SS}	96	V _{SS}	138	V _{SS}
13	DQ9	55	DQ16	97	DQ41	139	DQ48
14	DQ10	56	DQ17	98	DQ42	140	DQ49
15	DQ11	57	DQ18	99	DQ43	141	DQ50
16	DQ12	58	DQ19	100	DQ44	142	DQ51
17	DQ13	59	V _{CC}	101	DQ45	143	V _{CC}
18	V _{CC}	60	DQ20	102	V _{CC}	144	DQ52
19	DQ14	61	NC	103	DQ46	145	NC
20	DQ15	62	NC	104	DQ47	146	NC
21	C0	63	NC	105	C4	147	NC
22	C1	64	V _{SS}	106	C5	148	V _{SS}
23	V _{SS}	65	DQ21	107	V _{SS}	149	DQ53
24	NC	66	DQ22	108	NC	150	DQ54
25	NC	67	DQ23	109	NC	151	DQ55
26	V _{CC}	68	V _{SS}	110	V _{CC}	152	V _{SS}
27	WE*	69	DQ24	111	CAS*	153	DQ56
28	DQMB0	70	DQ25	112	DQMB4	154	DQ57
29	DQMB1	71	DQ26	113	DQMB5	155	DQ58
30	CS0*	72	DQ27	114	NC	156	DQ59
31	NC	73	V _{CC}	115	RAS*	157	V _{CC}
32	V _{SS}	74	DQ28	116	V _{SS}	158	DQ60
33	A0	75	DQ29	117	A1	159	DQ61
34	A2	76	DQ30	118	A3	160	DQ62
35	A4	77	DQ31	119	A5	161	DQ63
36	A6	78	V _{SS}	120	A7	162	V _{SS}
37	A8	79	CLK2	121	A9	163	CLK3
38	A10 / AP (Note)	80	NC	122	BA0 (Note)	164	NC
39	BA1 (Note)	81	NC	123	A11	165	SA0
40	V _{CC}	82	SDA	124	V _{CC}	166	SA1
41	V _{CC}	83	SCL	125	CLK1	167	SA2
42	CLK0	84	V _{CC}	126	NC	168	V _{CC}

Note : 1. Address A10 / AP : Initiates Auto Precharge
2. Address BA0,BA1 : Bank select within the SDRAM devices

SDC8UL7284-(67/84/100/125)T-S

SERIAL PD INFORMATION

Byte#	Function Described	Function Supported				Hex Value			
		125 Mhz	100 Mhz	84 Mhz	67 Mhz	125 Mhz	100 Mhz	84 Mhz	67 Mhz
0	# Bytes Written into serial memory at module mfr	128 bytes				80h			
1	Total # bytes of SPD memory device	256 bytes				08h			
2	Fundamental memory type	SDRAM				04h			
3	# Row Address on this assembly	12				0Ch			
4	# Column Addresses on this assembly	9				09h			
5	# Module Banks on this assembly	1				01h			
6	Data Width of this assembly	x72				48h			
7	Data Width of this assembly (continued)					00h			
8	Voltage interface standard of this assembly	LVTTTL				01h			
9	SDRAM cycle time at CL=3 (tCLK)	8ns	10ns	12ns	15ns	80h	A0h	C0h	F0h
10	SDRAM Access from Clock at CL=3 (tAC)	7.5ns	8.5ns	8.5ns	9.0ns	75h	85h	85h	90h
11	DIMM configuration type	ECC				02h			
12	Refresh Rate/Type	S/R, Normal 15.6 ms				80h			
13	SDRAM Width Primary DRAM	x8				08h			
14	ECC SDRAM Data Width	x8				08h			
15	Min. clock delay, Back to Back Random Column Addresses (ICCD)	1CLK				01h			
16	Burst Length Supported	1, 2, 4, 8 & Full Page				8Fh			
17	# Banks on each SDRAM device	4				04h			
18	CAS# Latency	2, 3				06h			
19	CS# Latency	0				01h			
20	Write Latency	0				01h			
21	SDRAM Module Attribute	Non-Buffered/Registered, Non-PLL				00h			
22	SDRAM Device Attribute	Vcc +/-10%, B/R, S/W, P/A, A/P				0Eh			
23	Min Clock cycle Time at CL=2 (tCLK)	12ns	15ns	17ns	20ns	C0h	F0h	20h	50h
24	Max. Data Access Time from clock at CL=2 (tAC)	9.0ns	9.0ns	10ns	10ns	90h	90h	A0h	A0h
25	Min Clock cycle Time at CL=1 (tCLK)	N/A				FFh			
26	Max. Data Access Time from clock at CL=1 (tAC)	N/A				FFh			
27	Min. Row Precharge Time (tRP)	29ns	30ns	35ns	40ns	1Dh	1Eh	23h	28h
28	Min. Row Active Delay (tRRD)	16ns	20ns	20ns	20ns	10h	14h	14h	14h
29	Min. RAS to CAS Delay (tRCD)	24ns	30ns	30ns	30ns	18h	1Eh	1Eh	1Eh
30	Min. RAS Pulse Width (tRAS)	48ns	60ns	65ns	70ns	30h	3Ch	41h	46h
31	Module Bank Density	64MB				10h			
32-61	Superset Information					FFh			
62	SPD Revision	Rev. 1				01h			
63	Checksum for bytes 0-62	JEDEC Calculation				JEDEC Calculation			

SDC8UL7284-(67/84/100/125)T-S

SERIAL PD INFORMATION (CONTINUED)

Byte#	Function Described	Function Supported				Hex Value			
		125 Mhz	100 Mhz	84 Mhz	67 Mhz	125 Mhz	100 Mhz	84 Mhz	67 Mhz
64	Manufacturers JEDEC ID code per JEP-106E	Continuation code				7Fh			
65	Manufacturers JEDEC ID code per JEP-106E	SMART's ID				94h			
66-71	Manufacturers JEDEC ID code per JEP-106E	None				FFh			
72	Manufacturing location	Mfr Specific Data							
73	Manufacturer's Part Number	S				53h			
74	Manufacturer's Part Number	D				44h			
75	Manufacturer's Part Number	C				43h			
76	Manufacturer's Part Number	8				38h			
77	Manufacturer's Part Number	U				55h			
78	Manufacturer's Part Number	L				4Ch			
79	Manufacturer's Part Number	7				37h			
80	Manufacturer's Part Number	2				32h			
81	Manufacturer's Part Number	8				38h			
82	Manufacturer's Part Number	4				34h			
83	Manufacturer's Part Number	1	1	8	6	31h	31h	38h	36h
84	Manufacturer's Part Number	2	0	4	7	32h	30h	34h	37h
85	Manufacturer's Part Number	5	0	T	T	35h	30h	54h	54h
86	Manufacturer's Part Number	T	T	S	S	54h	54h	53h	53h
87	Manufacturer's Part Number	S	S	None	None	53h	53h	FFh	FFh
88	Manufacturer's Part Number	None				FFh			
89	Manufacturer's Part Number	None				FFh			
90	Manufacturer's Part Number	None				FFh			
91	Revision Code	Mfr Specific Data				Mfr Specific Data			
92	Revision Code	None				FFh			
93	Manufacturing Date	DATE				DATE			
94	Manufacturing Date	DATE				DATE			
95-98	Assembly Serial Number	Serial Number				S.No.			
99	Manufacturer Specific Data	S				53h			
100	Manufacturer Specific Data	M				4Dh			
101	Manufacturer Specific Data	A				41h			
102	Manufacturer Specific Data	R				52h			
103	Manufacturer Specific Data	T				54h			
104	Manufacturer Specific Data	M				4Dh			
105	Manufacturer Specific Data	o				6Fh			
106	Manufacturer Specific Data	d				64h			
107	Manufacturer Specific Data	u				75h			
108	Manufacturer Specific Data	l				6Ch			
109	Manufacturer Specific Data	a				61h			
110	Manufacturer Specific Data	r				72h			
111	Manufacturer Specific Data	T				54h			
112	Manufacturer Specific Data	e				65h			
113	Manufacturer Specific Data	c				63h			
114	Manufacturer Specific Data	h				68h			
115	Manufacturer Specific Data	n				6Eh			
116	Manufacturer Specific Data	o				6Fh			
117	Manufacturer Specific Data	l				6Ch			
118	Manufacturer Specific Data	o				6Fh			
119	Manufacturer Specific Data	g				67h			
120	Manufacturer Specific Data	i				69h			
121	Manufacturer Specific Data	e				65h			
122	Manufacturer Specific Data	s				73h			
123	Manufacturer Specific Data	None				FFh			
124	Manufacturer Specific Data	None				FFh			
125	Manufacturer Specific Data	None				FFh			
126 (*)	INTEL specification frequency	66 Mhz				66h			
127 (*)	INTEL specification CAS# Latency Support	2,3				06h			
128-255	Open for CPQ Use for Read & Write	None				FFh			

(*) INTEL specification extension: These bytes are required for compatibility with previously released systems.

SDC8UL7284-(67/84/100/125)T-S

DC CHARACTERISTICS

($V_{CC} = 3.3V \pm 0.3V$, $V_{SS} = 0V$, $T_A = 0$ to $+70^\circ C$)

Parameter	Symbol	Test Condition	125		100		84		67		Unit	Note
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
Operating Current	I_{CC1}	No Burst, $t_{CK} = \min.$ $t_{RC} = \min.$	-	810	-	720	-	675	-	630	mA	1, 2
		No Burst, $t_{CK} = \min.$, $t_{RC} = \min.$ All Banks Active	-	1440	-	1260	-	1170	-	1080	mA	1, 2
Precharge Standby Current	I_{CC2}	CKE - V_{IL} , $t_{CK} = \min.$ All Banks Idle	-	9	-	9	-	9	-	9	mA	1, 2
		CKE = V_{IH} , $t_{CK} = \min.$ All Banks Idle	-	180	-	180	-	180	-	180	mA	1.2
Active Standby Current	I_{CC3}	CKE = V_{IL} , $t_{CK} = \min.$ Any Bank Active	-	27	-	27	-	27	-	27	mA	1, 2
		CKE = V_{IH} , $t_{CK} = \min.$ Any Bank Active	-	225	-	225	-	225	-	225	mA	1, 2
Burst Mode Current	I_{CC4}	$t_{CK} = \min.$	-	1620	-	1350	-	1170	-	960	mA	1, 2
Refresh Current	I_{CC5}	$t_{CK} = \min.$, $t_{RC} = \min.$, $t_{RRD} = \min.$ Auto Refresh	-	1845	-	1620	-	1485	-	1350	mA	1, 2
Self Refresh Current	I_{CC6}	CKE - V_{IL}	-	4.5	-	4.5	-	4.5	-	4.5	mA	1, 2
Input Leakage	I_{LI}	$0V \leq V_{in} \leq V_{CC}$	-90	90	-90	90	-90	90	-90	90	μA	
Output Leakage Current	I_{LO}	$0V \leq V_{out} \leq V_{CC}$ $D_{out} = \text{Disable}$	-10	10	-10	10	-10	10	-10	10	μA	
Output High Voltage	V_{OH}	High $I_{out} = -2mA$	2.4	-	2.4	-	2.4	-	2.4	-	V	
Output Low Voltage	V_{OL}	Low $I_{out} = 2 mA$	-	0.4	-	0.4	-	0.4	-	0.4	V	

$\dagger CL = CAS^*$ Latency

- Notes:
- I_{CC} depends on output load condition when the device is selected $I_{CC} (\max.)$ is specified at the output open condition.
 - An initial pulse of 200 μs is required after power-up followed by a minimum of eight Auto-Refresh-Cycles.

CAPACITANCE

($T_A = +25^\circ C$, $V_{CC} = 3.3V \pm 0.3V$)

Parameter	Symbol	Max.	Unit	Note
Input Capacitance (Address, WE*, CKE0, RAS*, CAS*)	C_{I1}	50	pF	1
Input Capacitance (DQMB0,DQMB2~DQMB7)	C_{I2}	13	pF	1
Input Capacitance (DQMB1)	C_{I3}	15	pF	1
Input Capacitance (CS0*,CLK0)	C_{I4}	30	pF	1
Input Capacitance (CS2*,CLK1)	C_{I5}	25	pF	1
Input Capacitance (CLK2,CLK3)	C_{I6}	15	pF	1
Input/Output Capacitance (DQ0~DQ63)	$C_{I/O}$	12	pF	1, 2

- Notes:
- Capacitance is measured with Boonton Meter or effective capacitance method.
 - CAS* - V_{IH} to disable D_{out} .

SDC8UL7284-(67/84/100/125)T-S

AC CHARACTERISTICS


(TA = 0 to +70°C, V_{CC} = 3.3V±0.3V, V_{SS} = 0V)

Parameter		Symbol	Unit	125		100		84		67		Notes
Clock Period	CL=3	t _{CK}	ns	8	-	10	-	12	-	15	-	1, 2, 3, 6
	CL=2			12	-	15	-	17	-	20	-	
Transition Time		t _T	ns	0.5	2	0.5	2	0.5	2	0.5	2	1, 2, 3
Clock High Time		t _{CH}	ns	3.5	-	3.5	-	4	-	4	-	1, 2, 3
Clock Low Time		t _{CL}	ns	3.5	-	3.5	-	4	-	4	-	1, 2, 3
Input Setup Time		t _{SI}	ns	2.5	-	3.0	-	3.0	-	3.0	-	1, 2, 3
Input Hold Time		t _{HI}	ns	1.0	-	1.0	-	1.0	-	1.0	-	1, 2, 3
Output Valid from Clock	CL=3	t _{AC}	ns	-	7.5	-	8.5	-	8.5	-	9.0	1, 2, 3
	CL=2			-	9	-	9	-	10	-	10	
Output In Low-Z		t _{OLZ}	ns	2	-	3	-	3	-	3	-	1, 2, 3
Output in High-Z		t _{OHZ}	ns	2	-	3	-	3	-	3	-	1, 2, 3, 4
Output Hold Time		t _{OH}	ns	2	-	3	-	3	-	3	-	1, 2, 3
Time between Refresh		t _{REF}	ms	-	65.6	-	65.6	-	65.6	-	65.6	1, 2, 3
RAS Cycle Time		t _{RC}	ns	77	-	90	-	100	-	110	-	1, 2, 3, 5
RAS Access Time		t _{RAC}	ns	-	45	-	54	-	56	-	60	1, 2, 3
CAS Access Time		t _{CAC}	ns	-	21	-	24	-	26	-	30	1, 2, 3
RAS Precharge Time		t _{RP}	ns	29	-	30	-	35	-	40	-	1, 2, 3
RAS Active Time		t _{RAS}	ns	48	100000	60	100000	65	100000	70	100000	1, 2, 3
RAS to CAS Delay Time		t _{RCD}	ns	24	-	30	-	30	-	30	-	1, 2, 3
Write Recovery Time		t _{WR}	ns	8	-	10	-	12	-	15	-	1, 2, 3
RAS to RAS Delay Time		t _{RRD}	ns	16	-	20	-	20	-	20	-	1, 2, 3
Power-down Exit Time		t _{PDE}	ns	3	-	3	-	4	-	5	-	1, 2, 3
CKE to Clock Disable		t _{CKE}	cycle	1		1		1		1		
DQM to Output in High-Z		t _{DQZ}	cycle	2		2		2		2		
DQM to Input Data Delay		t _{DQD}	cycle	0		0		0		0		
Last Output to Write Command Delay		t _{OWD}	cycle	2		2		2		2		
Write Command to Input Data Delay		t _{DWD}	cycle	0		0		0		0		
Precharge to Output in High-Z Delay	CL=3	t _{ROH}	cycle	3		3		3		3		
	CL=2			2		2		2		2		
Burst Stop Command to output in High-Z Delay	CL=3	t _{BSH}	cycle	3		3		3		3		
	CL=2			2		2		2		2		
Mode Register Access to Bank Active (min.)		t _{MRD}	cycle	2		2		2		2		
CAS to CAS Delay		t _{CCD}	cycle	1		1		1		1		
CAS Bank Delay		t _{CBD}	cycle	1		1		1		1		
Write to Precharge Read Delay	CL=3	t _{RWL}	cycle	1		1		1		1		
	CL=2			1		1		1		1		

- Notes:
1. An initial pulse of at least 200μs is required after power-up followed by a minimum of eight auto refresh cycles.
 2. AC characteristics assume t_T = 1ns and 50pF capacitive load. If t_T is longer than 1ms, reference level for measuring time of input signal is V_{IH} (min.) and V_{IL} (max.).
 3. 1.4V is the reference level for measuring timing of input signals.
 4. t_{HZ} and t_{OH} defines the time at which the outputs achieve ±200mV.
 5. Actual clock output of t_{RC} will be sum clock of t_{RAS} and t_{RP}.
 6. 20ns is not supported in SPD.

Physical Dimensions

168-pin (84x2) DIMM

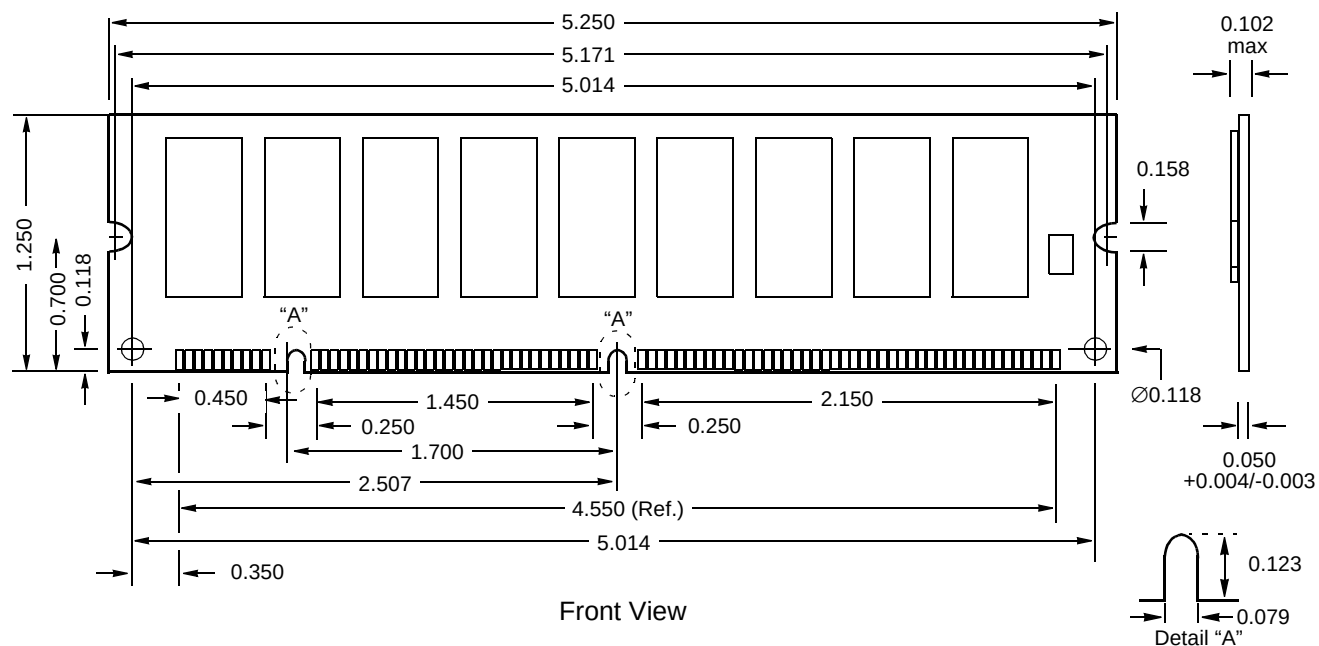

- Notes:
1. All dimensions are in inches.
 2. Pin 85 is behind pin 1 on the back side.

SDC8UL7284-(67/84/100/125)T-S

Ordering Information

S D C 8 U L 72 8 4 - 100 T - S

(1) (2) (3) (4) (5) (6) (7) (8) (8a) (9) (10) (11) (12) (13) (14)

(1) **Memory Type**

S : SDRAM
G : SGRAM

(2) **Module Shape**

S : SIMM
D : DIMM
O : Small Outline DIMM

(3) **Module Pin Count**

A : 72-pin
B : 144-pin
C : 168-pin
D : 200-pin

(4) **Word Depth**

1 : 1M
2 : 2M
4 : 4M
8 : 8M
256 : 256K
512 : 512K

(5) **Buffer Type**

B : Buffered
U : Unbuffered

(6) **Operating Voltage & Power Consumption**

V : 3.3V & Standard Power
L : 3.3V & Low Power

(7) **Data Width**

(ex. 64=x64, 72=x72 etc.)

(8) **Device Configuration**

4 : x4
8 : x8
1 : x16
3 : x32

(8a) **Refresh**

2 : 2krf
4 : 4krf

(9) **Interface Level**

Blank : LVTTTL
S : SSTL

(10) **Module Revision / Applied "Standard" *1**

Blank : Rev. 0
A : Rev. 1
B : Rev. 2 (etc.)

*1 When DRAM device or PCB is revised, the revision is changed

(11) **Clock Frequency**

67 : 67Mhz
84 : 84Mhz
100 : 100Mhz
125 : 125Mhz

(12) **Package of Component**

J : SOJ
T : TSOP

(13) **Private Brand Name *2**

Blank : Common Products
G : FMG Brand

*2 This column is applicable to custom modules, NOT applicable to JEDEC standard commodity products

(14) **Assembly & Test Site**

S : Smart Modular Technologies

FUJITSU LIMITED

For further information please contact:

Japan

FUJITSU LIMITED

Memory Marketing Dept.

4-1-1, Kamikodanaka Nakahara-ku,

Kawasaki 211-88, Japan

Tel: +81-44-754-3767

Fax: +81-44-754-3343

Internet: <http://www.fujitsu.co.jp/>

North and South America

FUJITSU MICROELECTRONICS, INC.

3545 North First Street

San Jose, CA 95134-1804, USA.

Tel: +1-408-922-9000

Fax: +1-408-922-9179

Customer Response Center (Mon-Fri: 7am-5pm (PST))

Tel: +1-800-866-8608

Fax: +1-408-922-9179

Internet: <http://www.fujitsumicro.com/>

Europe

FUJITSU MIKROELEKTRONIK GmbH

Am Siebenstein 6-10

63303 Dreieich-Buchsschlag

Germany

Tel: +49-6103-690-0

Fax: +49-6103-690-122

Internet: <http://www.fujitsu-edc.com/>

Asia

FUJITSU MICROELECTRONICS ASIA PTE LIMITED

#05-08, 151 Lorong Chuan

NewTechPark

Singapore 556741

Tel: +65-281-0770

Fax: +65-281-0220

Internet: <http://www.fsl.com.sg/>

All Rights Reserved.

Circuit diagrams utilizing Fujitsu products are included as a means of illustrating typical semiconductor applications. Complete information sufficient for construction purposes is not necessarily given.

The information given in this document have been carefully checked and is believed to be reliable. However, Fujitsu assumes no responsibility for inaccuracies.

The information contained in this document does not convey any licence under the copyrights, patent rights or trademarks claimed and owned by Fujitsu.

Fujitsu reserves the right to change products or specifications without notice.

No part of this publication may be copied or reproduced in any form or by any means, or transferred to any third party without prior written consent of Fujitsu.

The information contained in this document are not intended for use with equipments which require extremely high reliability such as aerospace equipments, undersea repeaters, nuclear control systems or medical equipments for life support.