

Features

- ◆ Smallest encapsulated 15W Converter!
Ultra compact size: 1.0" x 1.0" x 0.4"
- ◆ Shielded metal case with isolated baseplate
- ◆ Wide 2:1 input ranges
- ◆ Output voltage Trim
- ◆ I/O isolation voltage 1500 VDC
- ◆ Very high efficiency up to 88%
- ◆ Operating temp. range : -40°C to +85°C
- ◆ Remote On/Off control
- ◆ Industry standard pinout
- ◆ 3-year product warranty



The THN-15 series is the latest generation of high performance dc-dc converter modules setting new standards concerning power density. This product with 15W comes in a encapsulated, shielded metal package with dimensions of only 1.0"x1.0"x 0.4" and occupies 50%(!) less board space. All models have wide 2:1 input voltage range and precisely regulated, isolated output voltages. Advanced circuit design provides high efficiency up to 88% which allows a operating temperature range of -40°C to +85°C (with derating) Further features include remote On/Off and trimmable output. Typical applications for these converters are mobile equipment, instrumentation, distributed power architectures in communication and industrial electronics and everywhere where space on PCB is critical.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
THN 15-1210	9 – 18 VDC (12 VDC nominal)	3.3 VDC	4'000 mA	84 %
THN 15-1211		5.0 VDC	3'000 mA	86 %
THN 15-1212		12 VDC	1'300 mA	85 %
THN 15-1213		15 VDC	1'000 mA	87 %
THN 15-1221		±5 VDC	±1'500 mA	85 %
THN 15-1222		±12 VDC	±625 mA	87 %
THN 15-1223		±15 VDC	±500 mA	88 %
THN 15-2410	18 – 36 VDC (24 VDC nominal)	3.3 VDC	4'000 mA	86 %
THN 15-2411		5.0 VDC	3'000 mA	86 %
THN 15-2412		12 VDC	1'300 mA	87 %
THN 15-2413		15 VDC	1'000 mA	88 %
THN 15-2421		±5 VDC	±1'500 mA	85 %
THN 15-2422		±12 VDC	±625 mA	88 %
THN 15-2423		±15 VDC	±500 mA	88 %
THN 15-4810	36 – 75 VDC (48 VDC nominal)	3.3 VDC	4'000 mA	86 %
THN 15-4811		5.0 VDC	3'000 mA	88 %
THN 15-4812		12 VDC	1'300 mA	88 %
THN 15-4813		15 VDC	1'000 mA	88 %
THN 15-4821		±5 VDC	±1'500 mA	85 %
THN 15-4822		±12 VDC	±625 mA	89 %
THN 15-4823		±15 VDC	±500 mA	88 %

Input Specifications

Input current at no load	12 Vin; 3.3 VDC model:	120 mA typ.
	12 Vin 5 VDC model:	90 mA typ.
	12 Vin other models:	40 mA typ.
	24 Vin; 3.3 VDC model:	50 mA typ.
	24 Vin; 5 VDC model:	65 mA typ.
	24 Vin; other models:	20 mA typ.
Input current at full load (nominal input)	48 Vin; 3.3 & 5 VDC models:	40 mA typ.
	48 Vin; other models:	15 mA typ.
Start-up voltage / under voltage shut down	12 Vin; 3.3 VDC model:	1370 mA typ.
	12 Vin; other models:	1550 mA typ.
	24 Vin; 3.3 VDC model:	670 mA typ.
	24 Vin; other models:	750 mA typ.
	48 Vin; 3.3 VDC model:	330 mA typ.
	48 Vin models:	380 mA typ.
Surge voltage (100 msec. max.)	12 Vin models:	9.0 VDC / 8.0 VDC
	24 Vin models:	17.0 VDC / 14.5 VDC
	48 Vin models:	33.0 VDC / 30.5 VDC
Reflected input ripple current	12 Vin models:	36 V max..
	24 Vin models:	50 V max.
	48 Vin models:	100 V max.
Conducted noise (input)		EN 55022 level A, FCC part 15, level A with external capacitor see application note.

Output Specifications

Voltage set accuracy		±1 %
Output voltage adj. range		±10 % only for single output models. see application note.
Regulation	– Input variation (Vmin – Vmax)	single output models: 0.2 % max.
		dual output models: 0.5 % max.
	– Load variation (0 – 100 %)	single output models: 0.2 % max.
		dual output models balanced load: 1.0 % max.
		dual output models unbalanced load (25% /100%): 5.0 % max.
Minimum load		not required
Ripple and noise (20 MHz bandwidth)		100 mVpk-pk max. with external capacitor see application note.
Temperature coefficient		±0.02 %/K
Output current limitation		at 150 % of Iout max., foldback
Short circuit protection		indefinite (automatic recovery)
Over voltage protection	3.3 Vout models:	3.7 – 5.4 Vout
	5 Vout models:	5.6 – 7.0 Vout
	12 Vout models:	13.5 – 19.6 Vout
	15 Vout models:	16.8 – 20.5 Vout
Start up time (nominal Vin and constant resistive load)		30 ms typ. (for power on and remote on)
Transient response setting time (25% load step chang)		250 µs typ.
Max. capacitive load	3.3 VDC models:	12'000 µF
	5 VDC models:	6'000 µF
	12 VDC models:	1'000 µF
	15 VDC models:	660 µF
	±5 VDC models:	±3'000 µF
	±12 VDC models:	±520 µF
	±15 VDC models:	±330 µF

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications


Temperature ranges	– Operating – Case temperature – Storage	–40°C to +85°C (with derating) +105°C max. –55°C to +125°C
Power derating		2.8 %/K above 70°C
Thermal impedance	– Natural convection – Natural convection with heat-sink	18.2°C/W 15.8°C/W
Humidity (non condensing)		5 % to 95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		>560'000 h
Isolation voltage (60 sec.)	– Input/Output	1'500 VDC
Isolation capacitance	– Input/Output	1000 pF typ.
Isolation resistance	– Input/Output (500 VDC)	>1'000 MOhm
Remote On/Off	– On: – Off: – Off idle current:	3.0 ... 15 VDC or open circuit 0 ... 1.2 VDC or short circuit pin 6 and pin 2 2.5 mA
Switching frequency (fixed)		400 kHz typ. (pulse width modulation PWM)
Thermal shock, mechanical shock & vibration	– Test conditions	EN 61373, MIL-STD-810F www.tracopower.com/products/mil810.pdf
Safety standards		UL /cUL 60950-1, EN 60950-1, IEC 60950-1
Safety approvals	– CB test report (IEC 60950-1) – UL/cUL	www.tracopower.com/products/thn15-cb.pdf www.ul.com -> certifications -> File e188913
Environmental compliance	– Reach – RoHS	www.tracopower.com/products/thn15-reach.pdf RoHS directive 2011/65/EU

Physical Specifications

Casing material	nickel coated copper
Baseplate	non conductive FR4
Potting material	epoxy (UL 94V-0 rated)
Weight	15 g (0.53 oz)
Soldering temperature	max. 265°C / 10sec.

Application note: www.tracopower.com/products/thn15-application.pdf

Outline Dimensions

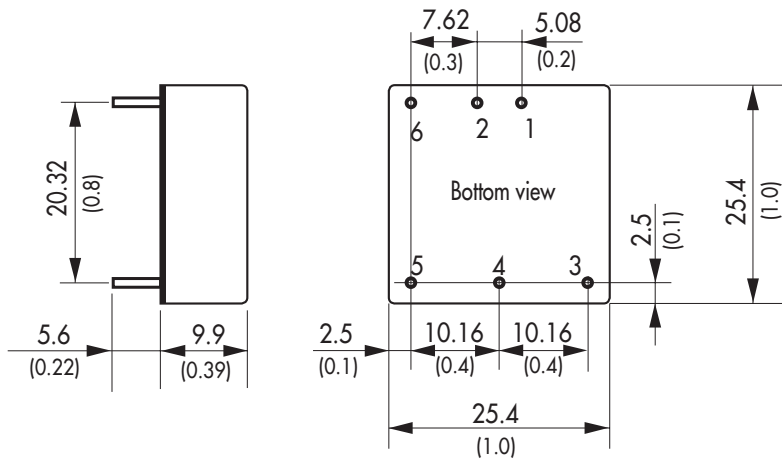

Pin-Out

Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	+ Vout	+ Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote On/Off	

Dimensions in [mm], () = Inch
 Pin diameter $\varnothing$ 1.0 (0.04)
 Pin pitch tolerances: ± 0.25 (± 0.01)
 Tolerances: ± 0.5 (± 0.02)

Heat-Sink (Option)

Order code: THN-HS1

(cont.: heat-sink, thermal pad, 2 clamps)

Material: Aluminum

Finish: Anodic treatment (black)




Weight: 8 g (0.28 oz) without converter

Thermal impedance after assembling: 15.8 K/W



Note:

The product label on converter has to be removed before mounting the heat-sink.
 For volume orders converters will be supplied with heat-sink already mounted. Please contact factory for quotation.
 Separate heat-sinks are only available for prototypes and small quantity orders.

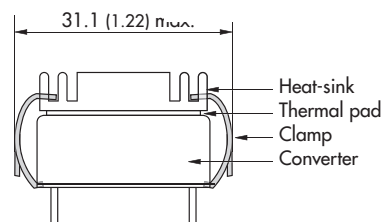

Dimensions in mm, () = Inch

Specifications can be changed anytime without notice.