
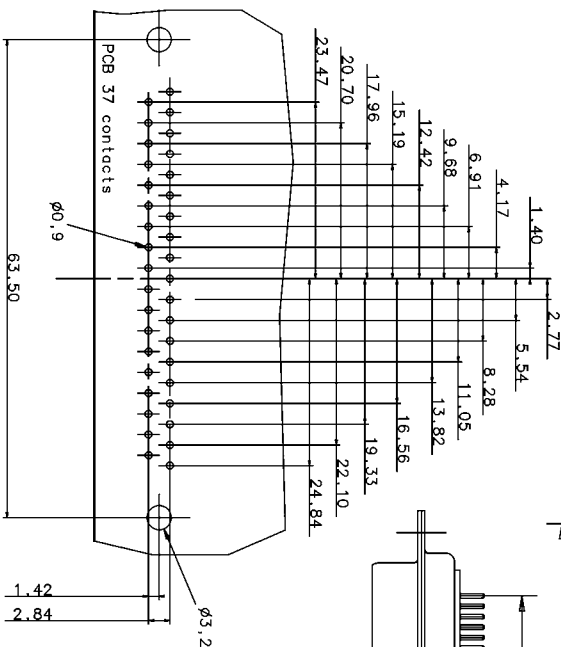
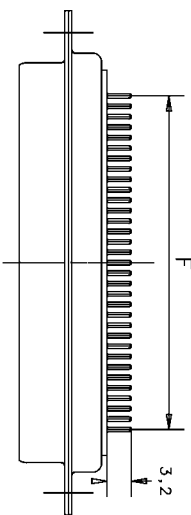
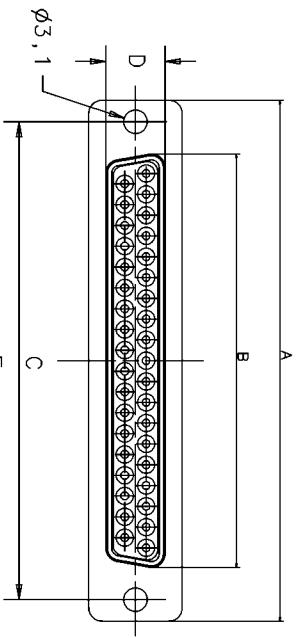



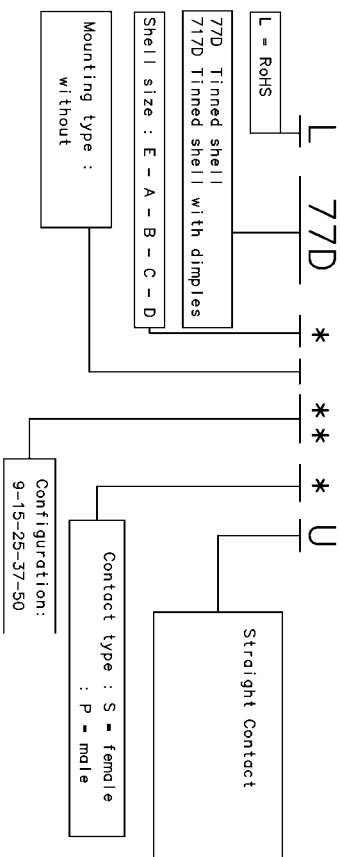

Tile bottom	A	B'	B	C	D'	D	E	F _{±0.05}	Pds	G	*
E	30.1-4.93	16-2.41	16-7.93	24.1-1.27	87-9.73	33-4.33	132-9.73	10, 98	2.74	7, 62	2x3
A	30.8-5.36	24-4.54	25-1.72	33-3.20	87-9.73	33-4.33	132-9.73	19, 20	2.74	7, 62	2x5
B	32.4-4.35	33-5.1	33-3.04	47-6.17	87-9.73	33-4.33	132-9.73	33, 12	2.76	7, 62	2x8
C	33-7.04	54-4.97	55-5.50	63-3.37	87-9.73	33-4.33	132-9.73	49, 68	2.76	7, 62	2x12
D	36.7-3.5	55-3.50	55-5.93	60-1.29	107-8.2	107-9.5	154-7.59	44, 20	2.76	10, 5	2x12

“ D ” SUBMINIATURE CONNECTORS

E	30	N	max.	3.5	N	fr.	fr.
A	50	N	max.	4.4	N	fr.	fr.
B	83	N	max.	8.0	N	fr.	fr.
C	123	N	max.	11.0	N	fr.	fr.
D	166	N	max.	14.5	N	fr.	fr.

[illegible]