

# Kingbright®

## T-1 (3mm) ROUND LED LAMPS

L-1154H BRIGHT RED

L-1154G GREEN

L-1154I HIGH EFFICIENCY RED

L-1154Y YELLOW

### Features

- HIGH INTENSITY.
- LOW POWER CONSUMPTION.
- POPULAR T-1 DIAMETER PACKAGE.
- GENERAL PURPOSE LEADS.
- RELIABLE AND RUGGED.
- LONG LIFE - SOLID STATE RELIABILITY.
- AVAILABLE ON TAPE AND REEL.

### Description

The Bright Red source color devices are made with Gallium Phosphide Red Light Emitting Diode.

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.


The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

The Pure Orange source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

The Pure Green source color devices are made with Gallium Phosphide Pure Green Light Emitting Diode.

### Package Dimensions

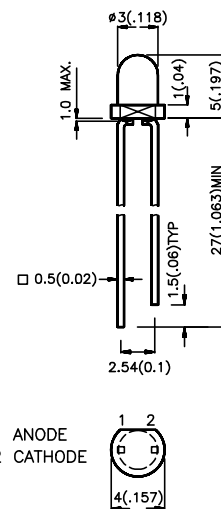

- Notes:
1. All dimensions are in millimeters (inches).
  2. Tolerance is  $0.25(0.01)$  unless otherwise noted.
  3. Lead spacing is measured where the lead emerge package.
  4. Specifications are subjected to change without notice.

### Selection Guide

| Part No.  | Dice                            | Lens Type          | Iv (mcd)<br>@ 10 mA |      | Viewing<br>Angle<br><b>2<math>\phi</math>1/2</b> |
|-----------|---------------------------------|--------------------|---------------------|------|--------------------------------------------------|
|           |                                 |                    | Min.                | Max. |                                                  |
| L-1154HD  | BRIGHT RED (GaP)                | RED DIFFUSED       | 1.3                 | 5    | 60°                                              |
| L-1154HT  |                                 | RED TRANSPARENT    | 2                   | 8    | 50°                                              |
| L-1154ID  | HIGH EFFICIENCY RED (GaAsP/GaP) | RED DIFFUSED       | 8                   | 50   | 60°                                              |
| L-1154IT  |                                 | RED TRANSPARENT    | 20                  | 125  | 50°                                              |
| L-1154GD  | GREEN (GaP)                     | GREEN DIFFUSED     | 8                   | 32   | 50°                                              |
| L-1154GT  |                                 | GREEN TRANSPARENT  | 20                  | 80   | 60°                                              |
| L-1154YD  | YELLOW (GaAsP/GaP)              | YELLOW DIFFUSED    | 8                   | 32   | 50°                                              |
| L-1154YT  |                                 | YELLOW TRANSPARENT | 10                  | 50   | 60°                                              |
| L-1154ND  | ORANGE (GaAsP/GaP)              | ORANGE DIFFUSED    | 8                   | 50   | 50°                                              |
| L-1154NT  |                                 | ORANGE TRANSPARENT | 20                  | 125  | 60°                                              |
| L-1154PGD | PURE GREEN (GaP)                | GREEN DIFFUSED     | 2                   | 8    | 50°                                              |
| L-1154PGT |                                 | GREEN TRANSPARENT  | 3.2                 | 20   | 60°                                              |

Note:  
1.  $\phi 1/2$  is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


# Electrical / Optical Characteristics at T<sub>A</sub>=25° C

| Symbol                | Parameter               | Device                                                                            | Typ.                                    | Max.                                   | Units | Test Conditions |
|-----------------------|-------------------------|-----------------------------------------------------------------------------------|-----------------------------------------|----------------------------------------|-------|-----------------|
| $\lambda_{peak}$      | Peak Wavelength         | Bright Red<br>High Efficiency Red<br>Green<br>Yellow<br>Pure Orange<br>Pure Green | 700<br>625<br>565<br>590<br>610<br>555  |                                        | nm    | IF=20mA         |
| $\Delta\lambda_{1/2}$ | Spectral Line Halfwidth | Bright Red<br>High Efficiency Red<br>Green<br>Yellow<br>Pure Orange<br>Pure Green | 45<br>45<br>30<br>35<br>35<br>30        |                                        | nm    | IF=20mA         |
| C                     | Capacitance             | Bright Red<br>High Efficiency Red<br>Green<br>Yellow<br>Pure Orange<br>Pure Green | 40<br>12<br>45<br>10<br>15<br>45        |                                        | pF    | VF=0V;f=1MHz    |
| V <sub>F</sub>        | Forward Voltage         | Bright Red<br>High Efficiency Red<br>Green<br>Yellow<br>Pure Orange<br>Pure Green | 2.0<br>2.0<br>2.2<br>2.1<br>2.0<br>2.25 | 2.5<br>2.5<br>2.5<br>2.5<br>2.6<br>2.6 | V     | IF=20mA         |
| I <sub>R</sub>        | Reverse Current         | All                                                                               | 10                                      |                                        | uA    | VR = 5V         |


## Absolute Maximum Ratings at T<sub>A</sub>=25° C

| Parameter                      | Bright Red           | High Efficiency Red | Green | Yellow | Pure Orange | Pure Green | Units |
|--------------------------------|----------------------|---------------------|-------|--------|-------------|------------|-------|
| Power dissipation              | 120                  | 105                 | 105   | 105    | 105         | 105        | mW    |
| DC Forward Current             | 25                   | 30                  | 25    | 30     | 30          | 25         | mA    |
| Peak Forward Current [1]       | 150                  | 150                 | 150   | 150    | 150         | 150        | mA    |
| Reverse Voltage                | 5                    | 5                   | 5     | 5      | 5           | 5          | V     |
| Operating/Storage Temperature  | -40° C To +85 ° C    |                     |       |        |             |            |       |
| Lead Soldering Temperature [2] | 260° C For 5 Seconds |                     |       |        |             |            |       |


Notes:  
1. 1/10 Duty Cycle, 0.1ms Pulse Width.  
2. 4mm below package base.

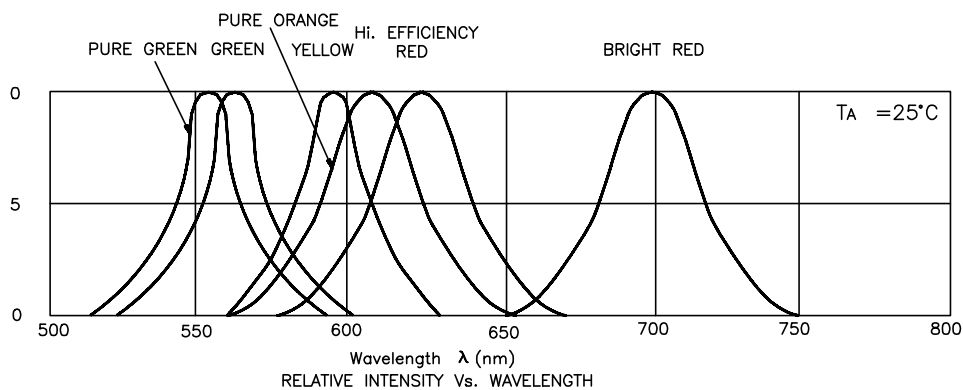


## Bright Red L-1154HD, L-1154HT




FORWARD CURRENT Vs. FORWARD VOLTAGE

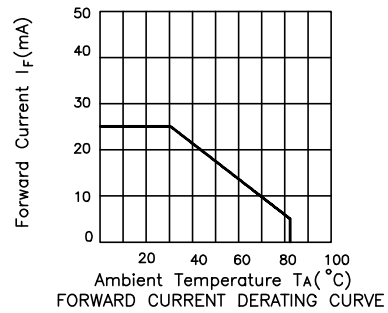

FORWARD CURRENT DERATING CURVE

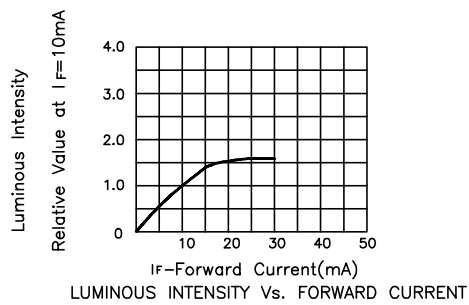


LUMINOUS INTENSITY Vs. FORWARD CURRENT

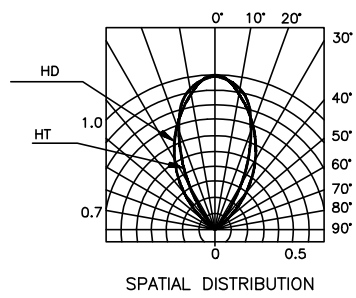


SPATIAL DISTRIBUTION


## High Efficiency Red L-1154ID, L-1154IT




FORWARD CURRENT Vs. FORWARD VOLTAGE

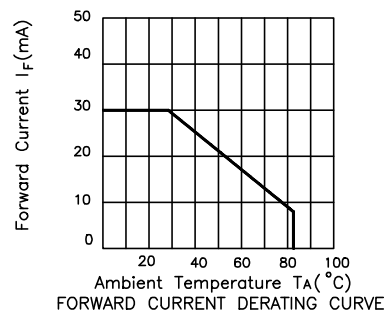

FORWARD CURRENT DERATING CURVE

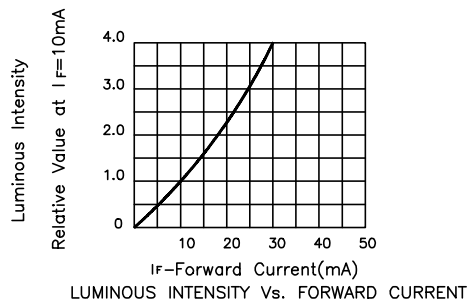


LUMINOUS INTENSITY Vs. FORWARD CURRENT

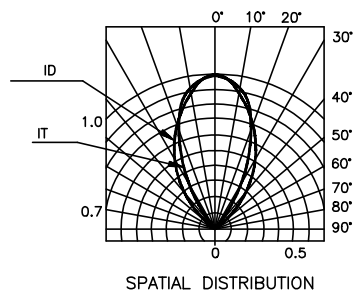


SPATIAL DISTRIBUTION


## Green L-1154GD, L-1154GT




FORWARD CURRENT Vs. FORWARD VOLTAGE

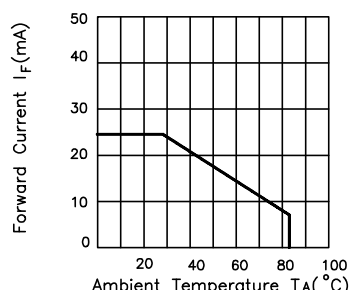

FORWARD CURRENT DERATING CURVE

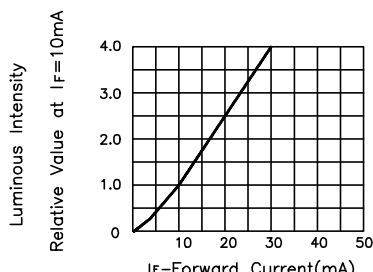


LUMINOUS INTENSITY Vs. FORWARD CURRENT

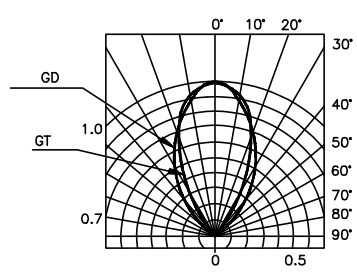


SPATIAL DISTRIBUTION


## Yellow L-1154YD, L-1154YT




FORWARD CURRENT Vs. FORWARD VOLTAGE

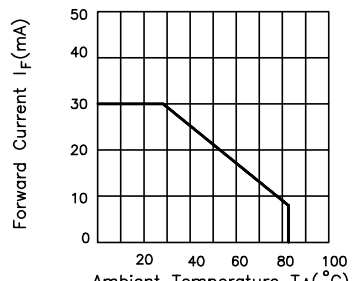

FORWARD CURRENT DERATING CURVE

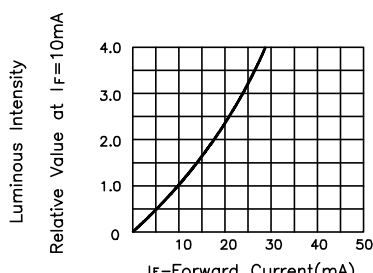


LUMINOUS INTENSITY Vs. FORWARD CURRENT

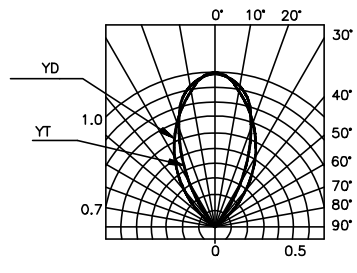


SPATIAL DISTRIBUTION


## Pure Orange L-1154ND, L-1154NT




FORWARD CURRENT Vs. FORWARD VOLTAGE

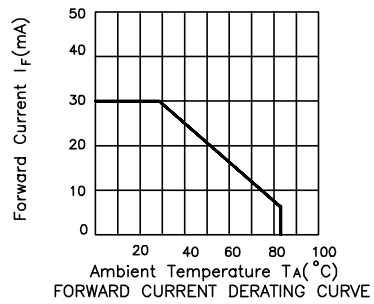

FORWARD CURRENT DERATING CURVE

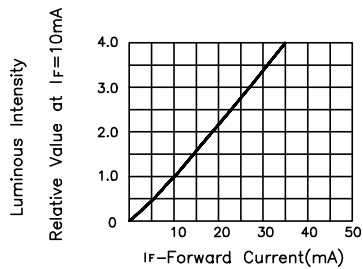


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


## Pure Green L-1154PGD, L-1154PGT




FORWARD CURRENT Vs. FORWARD VOLTAGE

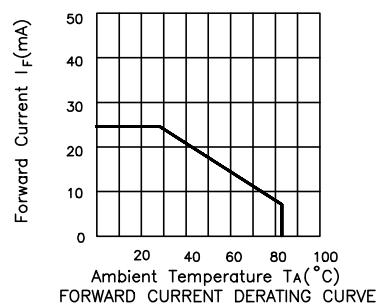

FORWARD CURRENT DERATING CURVE

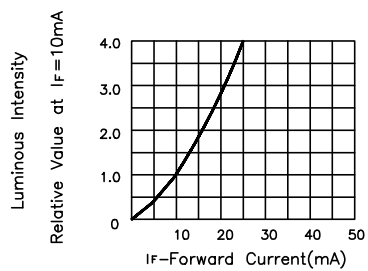

LUMINOUS INTENSITY Vs. FORWARD CURRENT



SPATIAL DISTRIBUTION