

System Reset (with built-in watchdog timer) Monolithic IC MM1095

Outline

This IC functions in a variety of CPU systems and other logic systems to generate a reset signal and reset the system accurately during momentary interruption or lowering of power supply voltage.
 It also has a built-in watchdog timer for operation diagnosis. This prevents the system from running wild by generating an intermittent reset pulse during system mis-operation.

Features

1. Built-in watchdog timer
2. Low minimum operating voltage 100 μ A typ.
3. Low operating limit voltage $V_{CC}=0.8V$
4. Watchdog stop function (RCT pin)
5. Few external parts


Package

DIP-8B (MM1095AD, MM1095BD)
 SOP-8C (MM1095AF, MM1095BF)
 SIP-8A (MM1095AS, MM1095BS)

Applications

1. Reset circuits in microcomputers, CPUs and MPUs
2. Logic circuit reset circuits
3. Microcomputer system monitoring, etc.

Pin Assignment

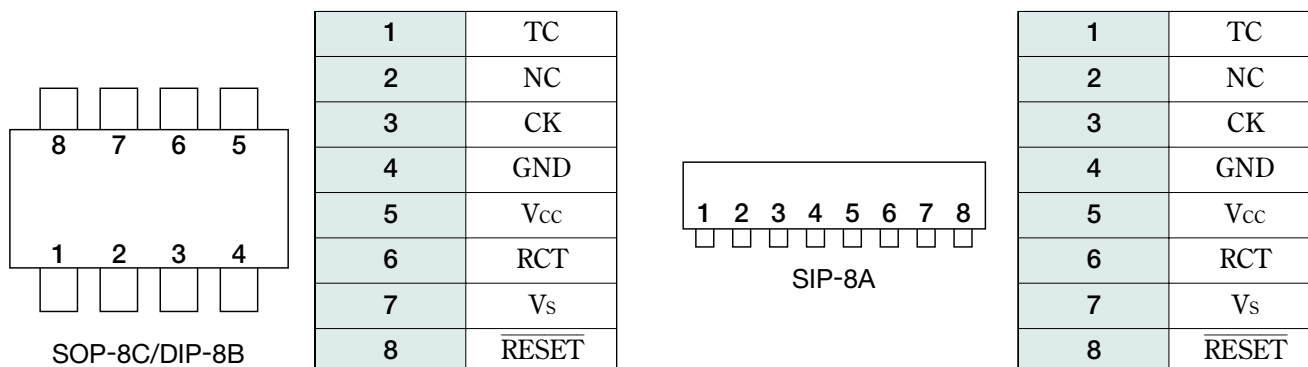

Pin Description

Pin No.	Name	Function
1	TC	T_{WD} , T_{WR} , T_{PR} variable pins (T_{WD} , T_{WR} and T_{PR} times are determined by the external capacitor.) T_{PR} (ms)=5000 $\times$ C_T (μ F) T_{WD} (ms)=500 $\times$ C_T (μ F) T_{WR} (ms)=100 $\times$ C_T (μ F)
2	N.C	
3	CK	Clock input pin, inputs clock from logic system
4	GND	GND pin
5	V _{CC}	Voltage detection MM1095A $\rightarrow$ 3.2V, MM1095B $\rightarrow$ 4.2V
6	RCT	Watchdog timer stop pin Operation modes : Operation $\rightarrow$ OPEN, Stop $\rightarrow$ connect to GND
7	V _s	Detection voltage variable pin
8	$\overline{\text{RESET}}$	Reset output pin (low output)


Absolute Maximum Ratings

Item	Symbol	Rating	Units
Power supply voltage	V _{CC} max.	-0.3~+10	V
CK pin input voltage	V _{CK}	-0.3~V _{CC} +0.3 ($\leq$ +10)	V
V _s pin input voltage	V _{VS}	-0.3~V _{CC} +0.3 ($\leq$ +10)	V
Voltage applied to RCT pin	V _{RCT}	-0.3~V _{CC} +0.3 ($\leq$ +10)	V
Voltage applied to $\overline{\text{RESET}}$ pin	V _{OH}	-0.3~V _{CC} +0.3 ($\leq$ +10)	V
Allowable loss	P _d	400	mW
Storage temperature	T _{STG}	-40~+125	°C

Recommended Operating Conditions


Item	Symbol	Rating	Units
Power supply voltage	V _{CC}	+2.2~+7.0	V
$\overline{\text{RESET}}$ sync current	I _{OL}	0~1.0	mA
Clock monitoring time setting	T _{WD}	0.1~1000	ms
Clock rise and fall times	t _{FC} , t _{FC}	<100	μ s
TC pin capacitance	C _T	0.0002~2	μ F
Operating temperature	T _{OP}	-25~+75	°C

Electrical Characteristics (DC) (Except where noted otherwise, MM1095A : $V_{CC}=3.6V$, $T_a = 25^{\circ}C$, MM1095B: $V_{CC}=5.0V$)

Item		Symbol	Measurement conditions	Min.	Typ.	Max.	Units
Consumption current	MM1095A	I_{CC}	During watchdog timer operation		100	150	μA
	MM1095B				130	195	
Detection voltage	MM1095A	V_{SL}	$V_S=OPEN, V_{CC}$ 	3.10	3.20	3.30	V
	MM1095B			4.05	4.20	4.35	
	MM1095A	V_{SH}	$V_S=OPEN, V_{CC}$ 	3.15	3.25	3.35	
	MM1095B			4.15	4.30	4.45	
Detection voltage temperature coefficient		$V_S/\Delta T$			± 0.01		$\%/^{\circ}C$
Hysteresis voltage	MM1095A	V_{HYS}	$V_{SH}-V_{SL}, V_{CC}$ 	25	50	100	mV
	MM1095B			50	100	150	
CK input threshold		V_{TH}		0.8	1.2	2	V
CK input current		I_{IH}	A : $V_{CK}=3.6V$, B : $V_{CK}=5.0V$		0	1	μA
		I_{IL}	$V_{CK}=0V$	-12	-6	-2	
Output voltage (High)	MM1095A	V_{OH}	$I_{\overline{RESET}} = -1\mu A$ $V_S=OPEN$	3.0	3.4		V
	MM1095B			4.0	4.5		
Output voltage (Low)		V_{OL1}	$I_{\overline{RESET}} = 0.5mA, V_S=0V$		0.2	0.4	V
		V_{OL2}	$I_{\overline{RESET}} = 1.0mA, V_S=0V$		0.3	0.5	
R output sync current		I_{OL}	$V_{\overline{RESET}} = 1.0V, V_S=0V$	1	2		mA
C_T charge current		I_{CT1}	$V_{TC}=1.0V$ during watchdog timer operation	-1.60	-2.40	-4.80	μA
		I_{CT2}	$V_{TC}=1.0V$ during power ON reset operation	-0.16	-0.24	-0.48	μA
Minimum operating power supply voltage to ensure $\overline{RESET}$		V_{CCL}	$V_{\overline{RESET}} = 0.4V$ $I_{\overline{RESET}} = 0.1mA$		0.8	1.0	V

Electrical Characteristics (DC)

(Except where noted otherwise, MM1095A : $V_{CC}=3.6V$, $T_a=25^{\circ}C$, MM1095B : $V_{CC}=5.0V$)
(Except where noted otherwise, resistance unit is Ω)

Item	Symbol	Measurement conditions	Min.	Typ.	Max.	Units
V _{CC} input pulse width	MM1095A	V_{CC} 	8			μs
	MM1095B		8			
CK input pulse width	T _{CKW}	CK  or 	3			μs
CK input cycle	T _{CK}		20			μs
Watchdog timer monitoring time *1	T _{WD}	C _T =0.02 μF	5	10	15	ms
Reset time for watchdog timer *2	T _{WR}	C _T =0.02 μF	1	2	3	ms
Reset hold time for power supply rise *3	T _{PR}	C _T =0.02 μF , V _{CC} 	50	100	150	ms
Output delay time from V _{CC} *4	T _{PD}	RESET pin, R _L =10k, C _L =20pF		2	10	μs
Output rise time *5	t _R	RESET pin, R _L =10k, C _L =20pF		2.0	4.0	μs
Output fall time *5	t _F	RESET pin, R _L =10k, C _L =20pF		0.2	1.0	μs

Notes:

- *1 Monitoring time is the time from the last pulse (negative edge) of the timer clear clock pulse until reset pulse output. In other words, reset output is output if a clock pulse is not input during this time.
- *2 Reset time means reset pulse width. However, this does not apply to power ON reset.
- *3 Reset hold time is the time from when V_{CC} exceeds detection voltage (V_{SH}) during power ON reset until reset release (RESET output high).
- *4 Output delay time is the time from when power supply voltage drops below detection voltage (V_{SL}) until reset (RESET output low).
- *5 Voltage range when measuring output rise and fall is 10~90%.
- *6 Watchdog timer monitoring time (T_{WD}), watchdog timer reset time (T_{WR}) and reset hold time (T_{PR}) during power supply rise can be changed by varying C_T capacitance. The times are expressed by the following formulae.

$$T_{PR} (ms) \approx 5000 \times C_T (\mu F)$$

$$T_{WD} (ms) \approx 500 \times C_T (\mu F)$$

$$T_{WR} (ms) \approx 100 \times C_T (\mu F)$$

Example: When C_T=0.02 μF


$$T_{PR} \approx 100ms$$

$$T_{WD} \approx 10ms$$


$$T_{WR} \approx 2ms$$

Measuring Circuits

Measuring Circuit 1 (DC)

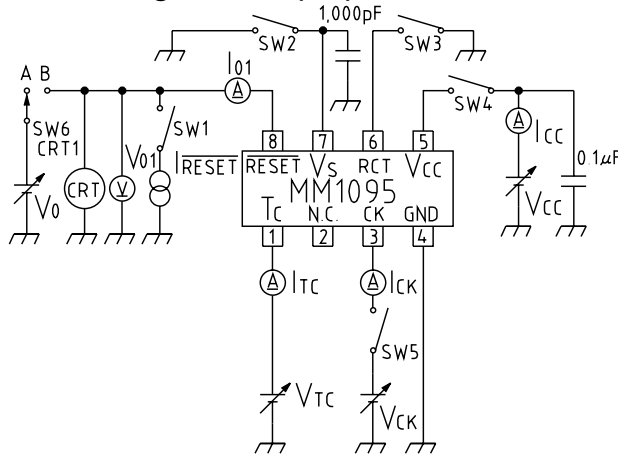

Measuring Circuit 2 (AC)

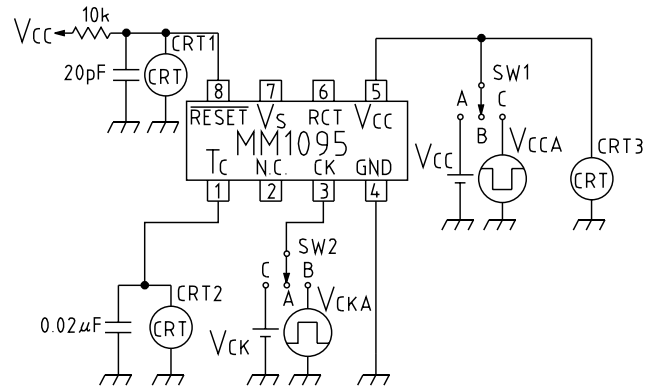


Measuring Circuit 1 SW & Power Supply Table

Item	Symbol	SW1	SW2	SW3	SW4	SW5	SW6	SW7	V _{CC}	V _{CK}	V _{CT}	I _{RESET}	VM, IM	Notes
Consumption current	I _{CC}	OFF	OFF	OFF	ON	ON	ON	A	3.6V	3.6V	0V	-	I _{CC}	
Detection voltage	V _{SL}	OFF	OFF	ON	ON	ON	ON	A	3.6V→3V	0V	2V	-	V ₀₁ , CRT1	
	V _{SH}	OFF	OFF	ON	ON	ON	ON	A	3V→3.6V	0V	2V	-	V ₀₁ , CRT1	
CK input threshold	V _{TH}	OFF	OFF	OFF	ON	ON	ON	A	3.6V	0V→3V	1V	-	I _{CK} , V _{CK}	
CK input current	I _{IH}	OFF	OFF	OFF	ON	ON	ON	A	3.6V	3.6V	0V	-	I _{CK}	
	I _{IL}	OFF	OFF	OFF	ON	ON	ON	A	3.6V	0V	0V	-	I _{CK}	
Output voltage (High)	V _{OH}	ON	OFF	ON	ON	ON	ON	A	3.6V	3.6V	2V	-1μA	V ₀₁	
Output voltage (Low)	V _{OL1}	ON	ON	ON	ON	ON	ON	A	3.6V	3.6V	2V	0.5mA	V ₀₁	
	V _{OL2}	ON	ON	ON	ON	ON	ON	A	3.6V	3.6V	2V	1.0mA	V ₀₁	
Output sink current	I _{OL1}	OFF	ON	ON	ON	ON	ON	B	3.6V	3.6V	2V	-	I ₀₁	V ₀ =1V
C _T charge current 1	I _{TC1}	OFF	OFF	OFF	ON	ON	OFF	A	3.6V	-	1V	-	I _{TC}	
C _T charge current 2	I _{TC2}	OFF	OFF	OFF	ON	ON	OFF	A	3.6V	-	1V	-	I _{TC}	
Minimum operating power supply voltage to ensure RESET	V _{CCL}	ON	OFF	ON	ON	ON	ON	A	0V→2V	0V	0V	-	V ₀₁ , V _{CC}	

Measuring Circuit 2 SW & Power Supply Table

Item	Symbol	SW1	SW2	V _{CCA}	V _{CC}	V _{CKA}	V _{CK}	CRT	Notes
V _{CC} input pulse width	T _{P1}	C	B	3.6V- 2.5V	-	1.4V- 0V	-	CRT1 CRT2	T1=8μs
CK input pulse width	T _{CKW}	A	B	-	3.6V	1.4V- 0V	-	CRT1 CRT2	T2=3μs
CK input cycle	T _{CK}	A	B	-	3.6V	1.4V- 0V	-	CRT1 CRT2	T3=20μs
Watchdog timer monitoring time	T _{WD}	A	A	-	3.6V	-	3.6V	CRT1 CRT2	
Reset time for watchdog timer	T _{WR}	A	A	-	3.6V	-	3.6V	CRT1 CRT2	
Reset hold time for power supply rise	T _{PR}	B→A	A	-	3.6V	-	3.6V	CRT1 CRT2	
Output delay time from V _{CC}	T _{PD}	C	A	3.6V- 0V	-	-	0V	CRT1	
Output rise time	T _R	A	A	-	3.6V	-	3.6V	CRT1	
Output fall time	T _F	A	A	-	3.6V	-	3.6V	CRT1	

Block Diagram

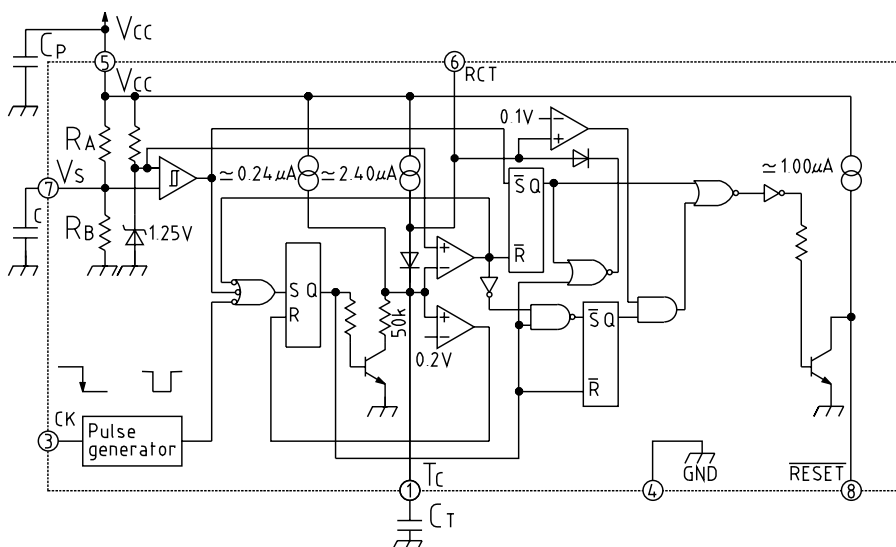


	R_A	R_B
MM1095A	$\approx 305k$	$\approx 195k$
MM1095B	$\approx 350k$	$\approx 150k$

Note 1 : $C_P=0.1\mu F$ approx.

Note 2 : $C \geq 1000pF$

Note 3 : The watchdog timer can be stopped by connecting the RCT pin to GND.
(Then it functions as a voltage detection circuit.)

Timing Chart

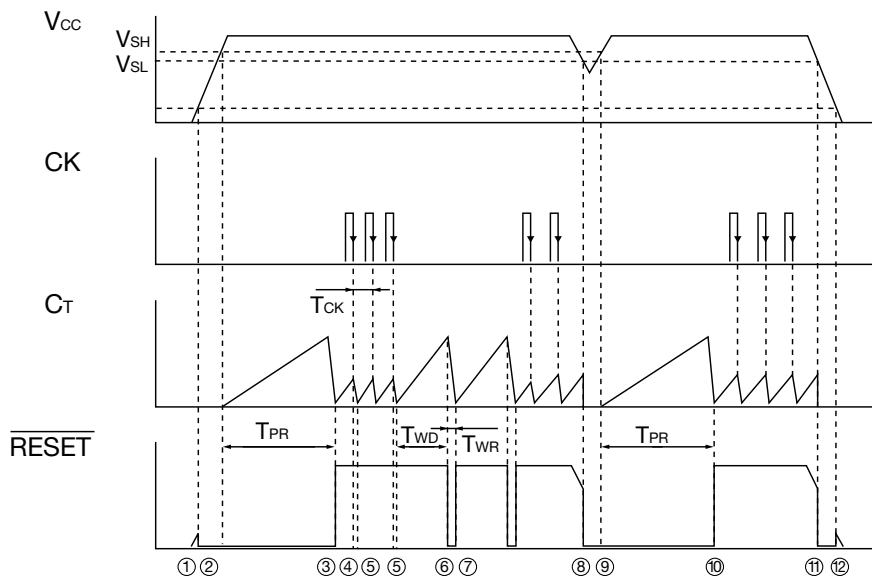

Description of Operation

1. $\overline{\text{RESET}}$ goes low when V_{CC} rises to approximately 0.8V.
2. Capacitor C_T charging starts when V_{CC} rises to V_{SH} (MM1095A $\approx$ 3.25V, MM1095B $\approx$ 4.3V). Output is in reset state at this time.
3. Output reset is released ($\overline{\text{RESET}}$ goes high) after a certain time (T_{PR}), from when C_T starts charging until discharge (the time from when C_T voltage reaches a certain threshold value 1 ($\approx$ 1.4V) until C_T voltage drops to a certain threshold value 2 ($\approx$ 0.2V). Approximately 1 μ A (V_{CC} =0.8V) of pull up current is output from RESET.
Reset hold time : T_{PR} is as follows.
 $T_{PR} \text{ (ms)} \approx 5000 \times C_T \text{ (}\mu\text{F)}$
 C_T charging starts again after reset release, and watchdog timer operation begins.
4. If a clock is input (negative edge trigger) to the CK pin during C_T charging, charging switches to discharge.
5. Discharge switches to charging when C_T voltage drops to a certain threshold value ($\approx$ 0.2V). Steps 4 and 5 are repeated while a normal clock is input from the logic system.
6. Output goes to reset state ($\overline{\text{RESET}}$ goes low) when the clock ceases and C_T voltage reaches reset ON threshold value ($\approx$ 1.4V).
The formula for C_T charging time (T_{WD} : watchdog timer monitoring time) until reset is output is as follows.
 $T_{WD} \text{ (ms)} \approx 500 \times C_T \text{ (}\mu\text{F)}$
7. Watchdog timer reset time T_{WR} is the discharge time until C_T voltage drops to reset OFF threshold value ($\approx$ 0.2V). The formula is as follows.
 $T_{WR} \text{ (ms)} \approx 100 \times C_T \text{ (}\mu\text{F)}$
After reset OFF threshold value is reached, output reset is released and C_T starts charging. Thereafter, steps 4 and 5 are repeated if a normal clock is input, and when the clock ceases, 6 and 7 are repeated.
8. Reset is output when V_{CC} drops to V_{SL} (MM1095A $\approx$ 3.2V, MM1095B $\approx$ 4.2V). C_T is charged simultaneously.
9. C_T charging starts when V_{CC} rises to V_{SH} .
When V_{CC} drops momentarily, C_T charging begins after the charge is first discharged, if the time from V_{CC} dropping below V_{SL} until it rises to V_{SH} is longer than the V_{CC} input pulse width standard value T_{PI} .
10. Output reset is released after V_{CC} goes above V_{SH} and after T_{PR} , and the watchdog timer starts. Thereafter, 8~10 are repeated when V_{CC} goes below V_{SL} .
11. When power is OFF, reset is output if V_{CC} goes below V_{SL} .
12. When V_{CC} drops to 0V, reset output is held until V_{CC} reaches 0.8V.