



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	39		H2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

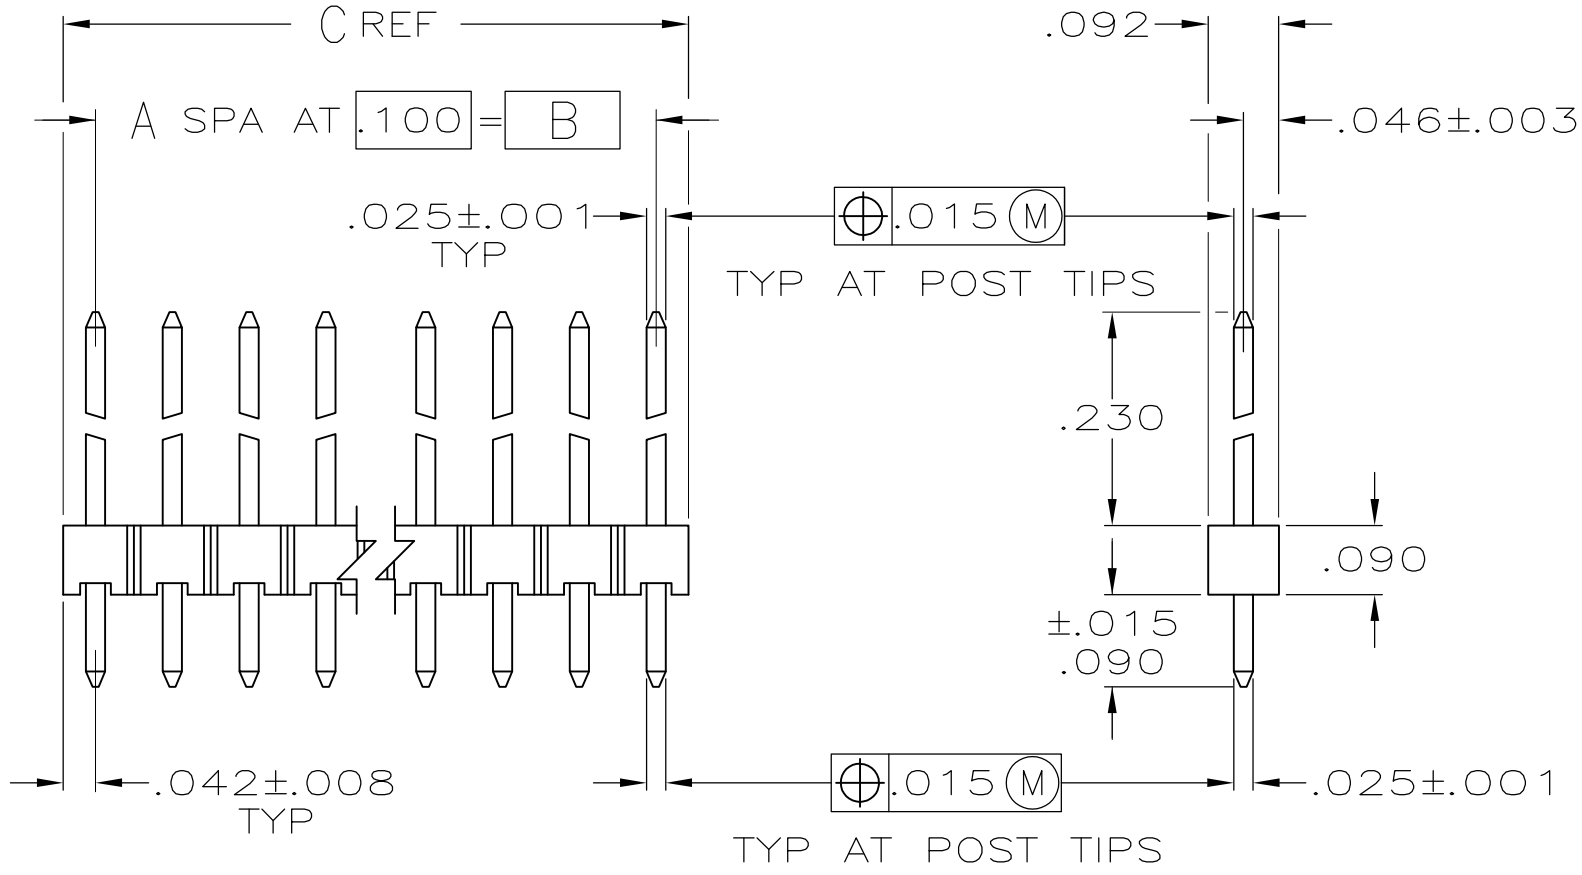

- 1
- ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3
- .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL ENTIRE POST
- 4
- .000100-.000200 BRIGHT TIN OVER .000050 NICKEL ENTIRE POST
- 5
- PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6
- HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR BLACK.
- 7
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

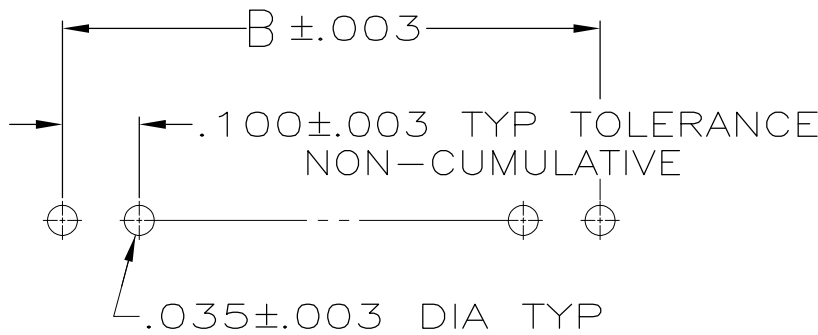

RECOMMENDED HOLE LAYOUT

OBSOLETE	4	1.584	1.500	15	16	4-103741-2
	4	1.384	1.300	13	14	4-103741-1
OBSOLETE	3	3.984	3.900	39	40	4-103741-0
	3	3.884	3.800	38	39	3-103741-9
OBSOLETE	3	3.784	3.700	37	38	3-103741-8
	3	3.684	3.600	36	37	3-103741-7
OBSOLETE	3	3.584	3.500	35	36	3-103741-6
	3	3.484	3.400	34	35	3-103741-5
OBSOLETE	3	3.284	3.300	33	34	3-103741-4
	3	3.284	3.200	32	33	3-103741-3
OBSOLETE	3	3.184	3.100	31	32	3-103741-2
	3	3.084	3.000	30	31	3-103741-1
OBSOLETE	3	2.984	2.900	29	30	3-103741-0
	3	2.884	2.800	28	29	2-103741-9
OBSOLETE	3	2.784	2.700	27	28	2-103741-8
	3	2.684	2.600	26	27	2-103741-7
OBSOLETE	3	2.584	2.500	25	26	2-103741-6
	3	2.484	2.400	24	25	2-103741-5
OBSOLETE	3	2.384	2.300	23	24	2-103741-4
	3	2.284	2.200	22	23	2-103741-3
OBSOLETE	3	2.184	2.100	21	22	2-103741-2
	3	2.084	2.000	20	21	2-103741-1
OBSOLETE	3	1.984	1.900	19	20	2-103741-0
	3	1.884	1.800	18	19	1-103741-9
OBSOLETE	3	1.784	1.700	17	18	1-103741-8
	3	1.684	1.600	16	17	1-103741-7
OBSOLETE	3	1.584	1.500	15	16	1-103741-6
	3	1.484	1.400	14	15	1-103741-5
OBSOLETE	3	1.384	1.300	13	14	1-103741-4
	3	1.284	1.200	12	13	1-103741-3
OBSOLETE	3	1.184	1.100	11	12	1-103741-2
	3	1.084	1.000	10	11	1-103741-1
OBSOLETE	3	.984	.900	9	10	1-103741-0
	3	.884	.800	8	9	103741-9
OBSOLETE	3	.784	.700	7	8	103741-8
	3	.684	.600	6	7	103741-7
OBSOLETE	3	.584	.500	5	6	103741-6
	3	.484	.400	4	5	103741-5
OBSOLETE	3	.384	.300	3	4	103741-4
	3	.284	.200	2	3	103741-3
OBSOLETE	3	.184	.100	1	2	103741-2
	3	.084	—	—	1	103741-1
PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN L. RINGLEY	7-19-85	 TE Connectivity		
			CHK R. ELICKER	7-19-85			
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:	APVD R. ELICKER	7-19-85	NAME ASSEMBLY, MOD II, HEADER, BREAKAWAY, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQ. POSTS		
		0 PLC ± -	PRODUCT SPEC				
		1 PLC ± -	—				
		2 PLC ± -	—				
		3 PLC ± .005	APPLICATION SPEC				
		4 PLC ± -	—				
		ANGLES ± -	—				
MATERIAL PHOSPHOR BRONZE	FINISH SEE TABLE	WEIGHT —	SIZE A2		CAGE CODE 00779	DRAWING NO C=103741	RESTRICTED TO —
CUSTOMER DRAWING			SCALE 4:1		SHEET 1 of 1		REV H2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-103741-0](#) [1-103741-7](#) [1-103741-0](#) [1-103741-6](#) [103741-7](#) [2-103741-0](#)