

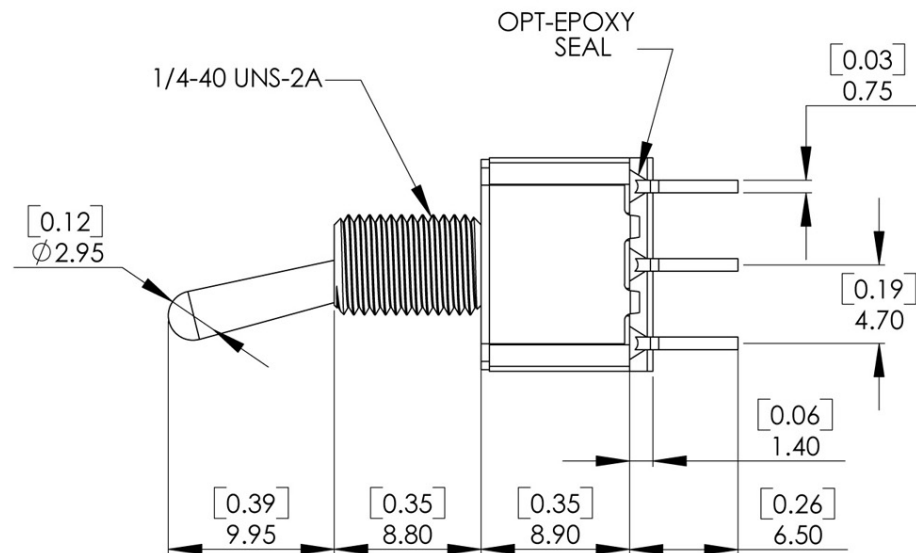
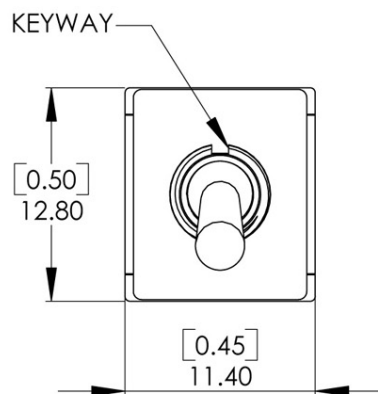


P.C. MOUNTING

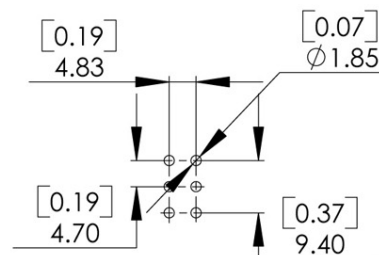

Schematic



Model No.	Switching Position		
T201	ON	NONE	ON
T202	ON	NONE	(ON)
T203	ON	OFF	ON
T204	(ON)	OFF	(ON)
T205	ON	OFF	(ON)
T206	2-3, 5-6 ON	2-3, 5-6 ON	2-1, 5-4 ON

SPECIFICATIONS:

CONTACT RATING : 5 AMPS @ 120 V AC or 28 V DC.
 2 AMPS @ 250 V AC or 0.4VA AMPS @20 V AC or DC.
 ELECTRICAL LIFE : 6,000 make-and-break cycles at full load.
 CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 V DC.
 100 mA, for both silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 MΩ min.
 DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30 °C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 ACTUATOR : ZINC ALLOY.
 BUSHING : ZINC ALLOY.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or gold over silver.
 SWITCH SUPPORT : Brass, tin plated.

GOLDSUN ELECTRONICS CO., LTD.

JAMECO NO.
26358-100

GOLDSUN NO.
T203T1B1A2QN

Description
MINI TOGGLE SWITCH DPDT
ON-OFF-ON 6P PCB TERMINAL

Rev.
1

UNIT:
mm

SCALE:

SHEET 1 OF 1

CAS No:
ERN No: