

### SPECIFICATIONS

**Material:** HEXSEALS: Silicone rubber conforms to A-A-59588 Class III, GR 50 (unless otherwise specified)

**Mounting Nut:** HEXSEALS: Brass, nickel-plated

**Temperature Range:** HEXSEALS: -94°F to +400°F

**Pressure Range:** Exceeds 15 psi internal and 1500 psi external.


**Operational Life:** 30,000 actuations (minimum).

**Shelf Life:** Excess of 25 years.

**Resistant to:** Salt spray, sunlight, ozone, weather, fungus, and most acids and lubricating oils

**Agency Recognition:** E-SEELS and HEXSEALS are UL-listed to UL Std. 50 types 1-13, and meet CSA standards.

**Installation:** If a reducing adaptor is required - see page 14 of HEXSEAL catalog HEX200 for part numbers and drawing.

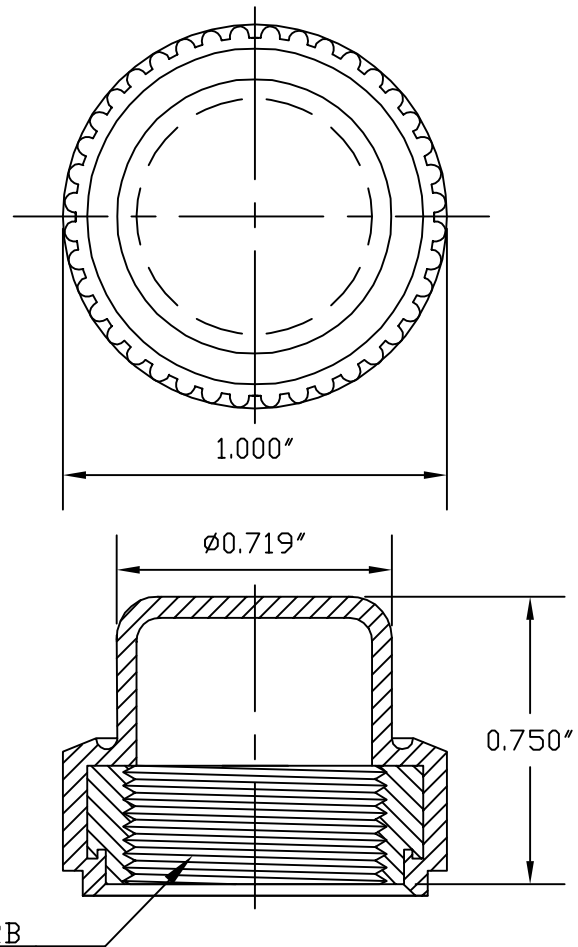

O	REDRAWN and MAT'L CHANGED			S.GOK	05-14-09	
N	CAD COMPUTER GENERATED				9-23-02	
M	MAT'L. NUT WAS ALUMINUM			NICK	8-27-69	
L	ALUM. SPEC. WAS QQ-A22-15A			NICK	8-9-69	
K	REDRAWN, ADDED SPECS, CORRECT BOOT AND ADAPTER P/N CALLOUT			NICK	1-13-67	
REV.	DESCRIPTION				DATE	
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.		TITLE:	BOOT, INDICATOR AND LIGHTED PUSHBUTTON (4082)	ENG.	M.M.	12-15-59
				DWN.	ANDREWS	12-15-59
				CHKD.	B.G.	12-15-59
MAT'L: SILICONE RUBBER A-A-59588 CLIII GR50		APM-HEXSEAL CORPORATION	SCALE 2 : 1	DWG. NO. (4082) HEXSEAL ®		
FINISH: TRANSPARENT CLEAR						

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.  
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[APM HEXSEAL:](#)

[4082](#)