
SPECIFICATIONS				
PARAMETERS	VALUES	UNIT		
RATED INPUT VOLTAGE	3	Vrms		
MAX INPUT VOLTAGE	20	Vp-p		
MINIMUM OUTPUT SPL @ 3Vrms/10CM	75	dBA		
(AT 1.0, 1.5, 2.0, 3.0 kHz)	75	UDA		
RESONANT FREQUENCY	1,800 ± 20%	Hz Hz		
FREQUENCY RANGE	300 ~ 20,000			
HOUSING MATERIAL	STAINLESS	-		
IOUSING MATERIAL	STEEL			
OPERATING TEMPERATURE	-20 ~ +60	°C		
WEIGHT	1.3 gram			


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

1	REVISION HISTORY							
	LTR	DESCRIPTION	DATE	APPROVED				
	-	RELEASED FROM ENGINEERING	2/9/2010					
	Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	5/25/2010	B.R.				
	В	REVISED MAX INPUT VOLTAGE	6/1/2011	B.R.				
	С	REVISED SPL MEASURED AT POINTS (kHz)	1/20/2012	B.R.				

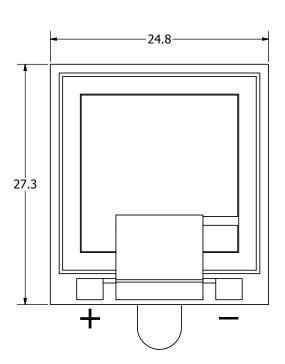

DOUBLE-SIDED TAPE



## NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE		Designed by	Date	Checked by	Date	Approved by
SPECIFIED: DIMENSIONS ARE IN	SIZE	B.R.	2/9/2010	C.W.	2/9/2010	B.R.
MILLIMETERS,		$\infty$	<b>6</b> 1		ΛDO	27710
TOLERANCES ARE ±0.5 AND	<b>A</b> 3	pui. AP32			22/10	
ANGLES ARE ±3°.	, (0		או וליכ	тм	C	

APS2718S-T-R
Speaker Fedition Sheet 1/1

Date

Drawn Date

2/9/2010 5/25/2010

APS2718S-T-R.idw

a projects unlimited compan

4

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio: