

DC/DC converter Input 9-36 and 18-72 Vdc Output up to 0.5A/3W

Key Features

- Industry standard DIL24
- Wide input voltage range, 9–36 V, 18–72 V
- High efficiency 74–83% typical
- Low idling power
- Full output power up to +75°C ambient temperature
- Input/Output isolation 1,500 Vdc
- MTBF > 650,000 hours at +25°C ambient
- Basic insulation according to UL 60950-1



The PKV series of DC/DC power modules is intended for general use in 12/24 V and 48/60V DC systems. Designed with MOSFET transistors and 200 kHz switching frequency, they are characterized by high efficiency over a wide load range, very low quiescent power and an excellent line and load regulation. The DC/DC power modules are encapsulated in an epoxy filled plastic box. The flammability ratings of

the encapsulating materials are in conformance with UL 94V-0 and have an adequate thermal conductivity. The materials withstand all normal PBA cleaning methods. Ericsson Power Modules is an ISO 9001/14001 certified supplier.

General

Absolute Maximum Ratings

Characteristics		min	max	Units
T _C	Case temperature ¹⁾	−40	+95	°C
T _S	Storage temperature	−40	+125	°C
V _I	Input voltage, 0.1 s max PKV 3000 PKV 5000		40 80	Vdc
V _{ISO}	Isolation voltage (input to output test voltage)	1,500		Vdc

Stress in excess of Absolute Maximum Ratings may cause permanent damage. Absolute Maximum Ratings, sometimes referred to as no destruction limits, are normally tested with one parameter at a time exceeding the limits of Output data or Electrical Characteristics. If exposed to stress above these limits, function and performance may degrade in an unspecified manner.

Note:

¹⁾ Corresponding typical ambient temperature range (T_A) at full output power is −40 to +75 °C.

Input T_A = +25 °C, unless otherwise specified

Characteristics		Conditions	min	typ	max	Units
V _I	Input voltage range	T _A = −40 to +75 °C PKV 3000 PKV 5000	9 18		36 72	V
V _{Ioff}	Turn-off input voltage	PKV 3000 PKV 5000			8 16	V
	Inrush current Peak I _{2t}	Low loss, low inductive capacitive source PKV 3000 PKV 5000		35 0.005 0.005		A A ² s A ² s
	Idling power	I _O = 0		0.3		W
V _{Iac}	Ripple voltage	I _O = I _{Omax} , BW = 20 MHz		100		mV _{p-p}

Miscellaneous

Characteristics		Conditions	min	typ	max	Unit
	Input/Output coupling capacitor	RH = 48%, T _C = +25 °C f = 100 Hz		1000		pF
	Switching frequency	V _I = V _{I nom} , I _O = I _{O max}		200		kHz

Environmental Characteristics

Test method	Reference	Test procedure & conditons	
Vibration (Sinusoidal)	IEC 68-2-6 F _C	Frequency Amplitude Acceleration Number of cycles Test duration	10...500Hz 0.75 mm 10 g 10 in each axis 1 h per axis
Shock (Half-sinus)	IEC 68-2-27 E _a	Peak acceleration Shock duration	200g 3 ms
Temperature change	IEC 68-2-14 N _a	Temperature Number of cycles	−40 °C to +125 °C 100

Safety

The PKV 3000 I and PKV 5000 I series DC/DC converters are designed in accordance with safety standards UL 60 950-1, *Safety of Information Technology Equipment*. The PKV 3000 I and PKV 5000 I series DC/DC converters are UL 60 950-1 recognized. The DC/DC converter should be installed in the end-use equipment, in accordance with the requirements of the ultimate application. The input source must be isolated by minimum Basic insulation from the primary circuit in accordance with UL 60 950-1. If the input voltage to the DC/DC converter is 72 V dc or less, then the output remains SELV (Safety Extra Low Voltage) under normal and abnormal operating conditions.

It is recommended that a slow blow fuse with a rating of 2 x I_{I max} be used at the input of each DC/DC converter.


If a fault occurs in the converter that imposes a short circuit on the input source, this fuse will provide the following functions:

- Isolate the faulty DC/DC converter from the input power source not to affect the operation of other parts of the system.
- Protect the distribution wiring from excessive current and power loss thus preventing hazardous overheating.

The galvanic isolation is verified in an electric strength test. The test voltage (V_{ISO}) between input and output is 1500 Vdc for 60 seconds. Leakage current is less than 1 μA at nominal input voltage.

The flammability rating for all construction parts of the DC/DC converter meets UL 94V-0.

Mechanical Data

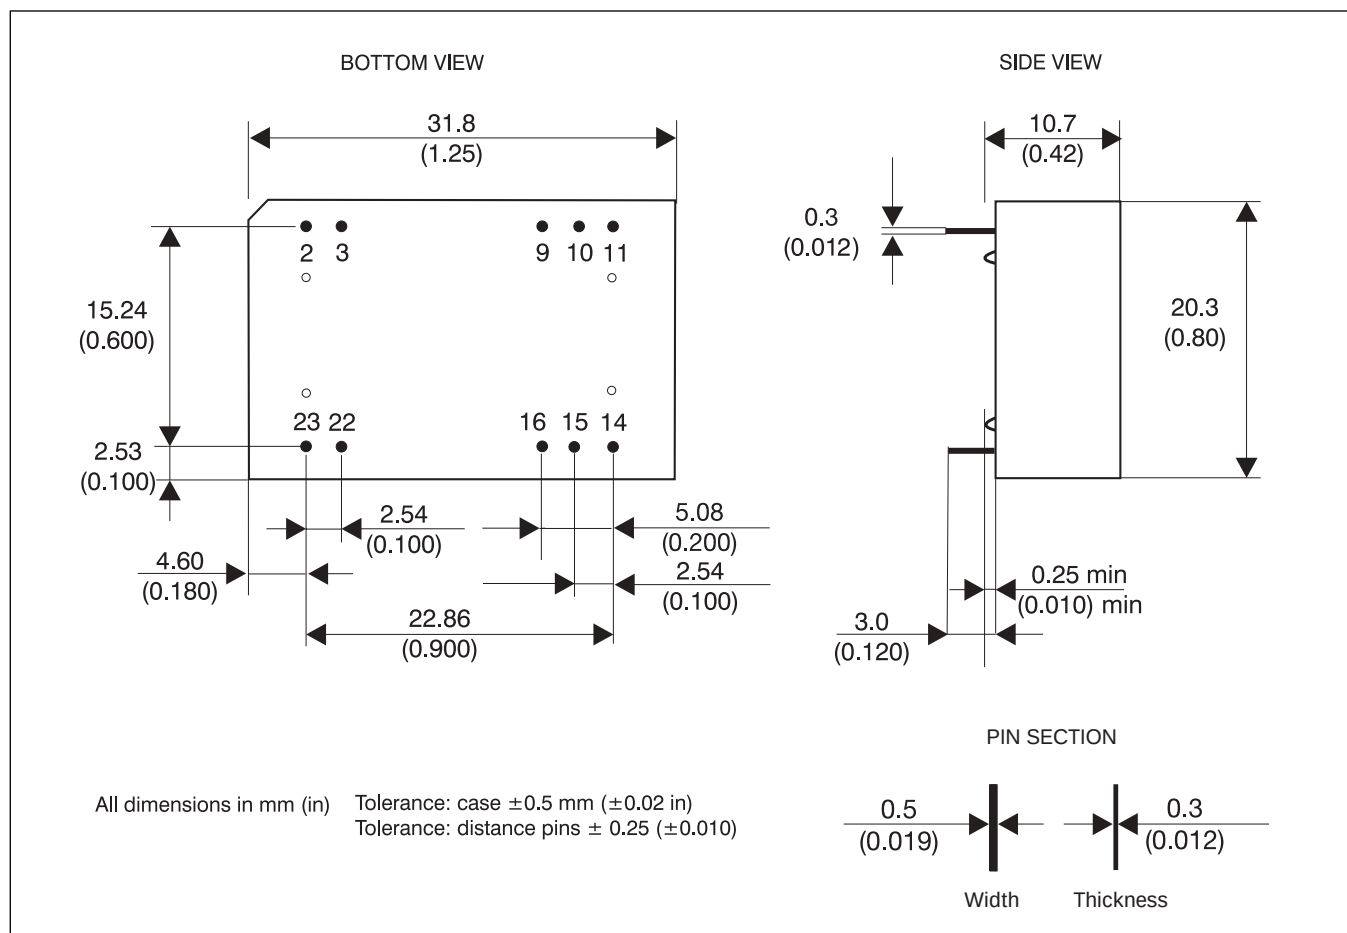

Connections

Pin	Designation	Function	
		Single output	Dual output
2	-In	Negative input	Negative input
3	-In	Negative input	Negative input
9	NC/Rtn	Not connected	Output return
10	NC	Not connected	Not connected
11	NC/-Out	Not connected	Negative output
14	+Out	Positive output	Positive output
15	NC	Not connected	Not connected
16	Rtn	Output return	Output return
22	+In	Positive input	Positive input
23	+In	Positive input	Positive input

Weight:

Maximum 15 g
(0.53 oz).

Pins:

Material: Copper
Plating: Tin Coating

Case:

Non conductive
plastic, UL 94V-0.

PKV 3110 PI

Output


T_A = +25°C, V_I = 9...36 V unless otherwise specified.

Characteristics		Conditions		Output 1			Unit
				min	typ	max	
V _O	Output voltage tolerance band	I _O =0.1...1.0 × I _{O max} and long term drift		3.20		3.40	V
	Line regulation	I _O =I _{O max}			6.6	16.5	mV
	Load regulation	I _O =0.1...1.0 × I _{O max} , V _I = 26 V			6.6	33	mV
t _{tr}	Load transient recovery time	I _O = 0.1...1.0 × I _{O max} , V _I = 26 V load step = 0.5 × I _{O max}			300		μs
V _{tr}	Load transient voltage				+100		mV
					-100		mV
T _{coeff}	Temperature coefficient	Measured after stabilization				±0.02	%/°C
t _r	Ramp-up time	I _O = 0.1...1.0 × I _{O max} , V _I = 26 V	0.1...0.9 × V _O		0.5		ms
t _s	Start-up time		From V _I connection to V _O = 0.9 × V _{Oi}		800	1300	ms
I _O	Output current					0.5	A
P _{O max}	Max output power			1.65			W
I _{lim}	Current limiting threshold ¹⁾	T _C < T _{C max}		0.50		1.62	A
I _{sc}	Short circuit current	V _I = 26 V			0.20		A
V _{O ac}	Output ripple & noise	I _O =I _{O max} , T _A = 25 °C	DC... 20 MHz		60		mVp-p
SVR	Supply voltage rejection (ac)	f = 100/120 Hz sine wave, 1 V _{p-p} , (SVR = 20 log (1 V _{p-p} /V _{O p-p}))			60		dB


1) At V_{out} ≤ 80% of nominal the power module goes into hick up mode.

Miscellaneous

Efficiency (typ)

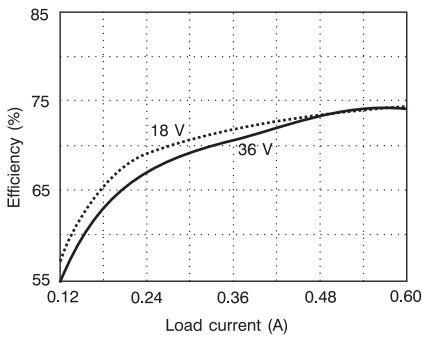

Power derating

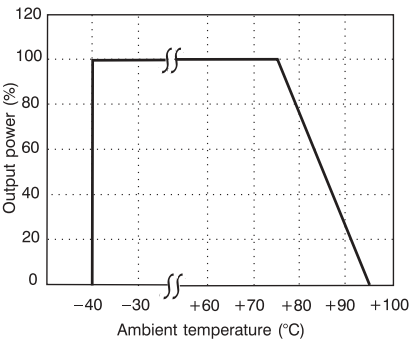

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	I _O = I _{Omax} , V _I = 26 V	66	73		%
P _d	Power dissipation	I _O = I _{Omax} , V _I = 26 V		0.61	0.85	W

PKV 3211 PI



Output

$T_A = +25^\circ\text{C}$, $V_I = 9\ldots 36\text{ V}$ unless otherwise specified.

Characteristics		Conditions		Output 1			Unit
				min	typ	max	
V _O	Output voltage tolerance band	I _O =0.1 ...1.0 × I _{Omax} and long term drift		4.90		5.10	V
	Line regulation	I _O =I _{Omax}			10	25	mV
	Load regulation	I _O =0.1 ...1.0 × I _{Omax} , V _I = 26 V			10	50	mV
t _{tr}	Load transient recovery time	I _O = 0.1 ...1.0 × I _{Omax} , V _I = 26 V load step = 0.5 × I _{Omax}			300		μS
V _{tr}	Load transient voltage				+100		mV
					−100		mV
T _{coeff}	Temperature coefficient	Measured after stabilization				±0.02	%/°C
t _r	Ramp-up time	I _O = 0.1 ...1.0 × I _{Omax} , V _I = 26 V	0.1 ...0.9 × V _O		0.5		ms
t _s	Start-up time		From V _I connection to V _O = 0.9 × V _{OI}		800	1300	ms
I _O	Output current					0.5	A
P _{Omax}	Max output power			2.5			W
I _{lim}	Current limiting threshold ¹⁾	T _C < T _{Cmax}		0.5		1.62	A
I _{sc}	Short circuit current	V _I =26 V			0.25		A
V _{Oac}	Output ripple & noise	I _O =I _{Omax} , T _A = 25 °C	DC20 MHz		60		mV _{p-p}
SVR	Supply voltage rejection (ac)	f = 100/120 Hz sine wave, 1 V _{p-p} , (SVR = 20 log (1 V _{p-p} /V _{O<p-p< sub="">))</p-p<>}			60		dB

¹⁾ At $V_{\text{out}} \leq 80\%$ of nominal the power module goes into hick up mode.

Miscellaneous

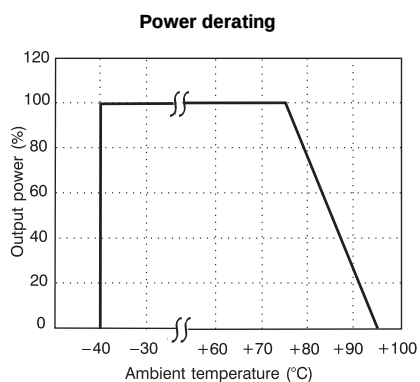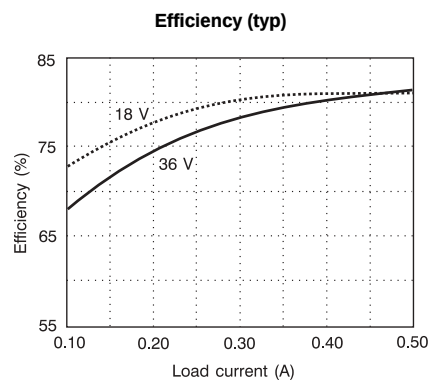

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\max}$, $V_I = 26\text{ V}$	76	82		%
P_d	Power dissipation	$I_O = I_{O\max}$, $V_I = 26\text{ V}$		0.55	0.79	W

PKV 3313 PI


Output

T_A = +25°C, V_I = 9...36 V unless otherwise specified.

Characteristics		Conditions		Output 1			Unit
				min	typ	max	
V _O	Output voltage tolerance band	I _O =0.1...1.0 × I _{O max} and long term drift		11.76		12.24	V
	Line regulation	I _O =I _{O max}			24	60	mV
	Load regulation	I _O =0.1...1.0 × I _{O max} , V _I = 26 V			24	120	mV
t _{tr}	Load transient recovery time	I _O = 0.1...1.0 × I _{O max} , V _I = 26 V load step = 0.5 × I _{O max}			300		μs
V _{tr}	Load transient voltage				+150		mV
					-150		mV
T _{coeff}	Temperature coefficient	Measured after stabilization				±0.02	%/°C
t _r	Ramp-up time	I _O = 0.1...1.0 × I _{O max} ,	0.1...0.9 × V _O		1.2		ms
t _s	Start-up time	V _I = 26 V	From V _I connection to V _O = 0.9 × V _{Oi}		800	1300	ms
I _O	Output current					0.25	A
P _{O max}	Max output power				3		W
I _{lim}	Current limiting threshold ¹⁾	T _C < T _{C max}			0.25	0.81	A
I _{sc}	Short circuit current	V _I = 26 V			0.35		A
V _{O ac}	Output ripple & noise	I _O =I _{O max} , T _A = 25 °C	DC... 20 MHz		60		mV _{p-p}
SVR	Supply voltage rejection (ac)	f = 100/120 Hz sine wave, 1 V _{p-p} , (SVR = 20 log (1 V _{p-p} /V _{O p-p}))			60		dB

1) At V_{out} ≤ 80% of nominal the power module goes into hick up mode.

Miscellaneous

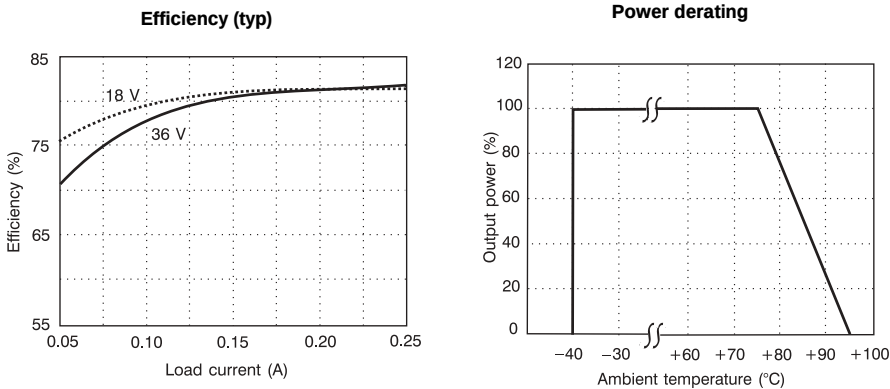

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	I _O = I _{Omax} , V _I = 26 V	76	82		%
P _d	Power dissipation	I _O = I _{Omax} , V _I = 26 V		0.66	0.95	W

PKV 3315 PI


Output

$T_A = +25^\circ\text{C}$, $V_I = 9\ldots 36\text{ V}$ unless otherwise specified.

Characteristics		Conditions		Output 1			Unit
				min	typ	max	
V _O	Output voltage tolerance band	I _O =0.1...1.0 × I _{Omax} and long term drift		14.7		15.3	V
	Line regulation	I _O =I _{Omax}			30	75	mV
	Load regulation	I _O =0.1...1.0 × I _{Omax} , V _I = 26 V			30	150	mV
t _{tr}	Load transient recovery time	I _O = 0.1...1.0 × I _{Omax} , V _I = 26 V load step = 0.5 × I _{Omax}			300		μS
V _{tr}	Load transient voltage				+200		mV
					−200		mV
T _{coeff}	Temperature coefficient	Measured after stabilization				±0.02	%/°C
t _r	Ramp-up time	I _O = 0.1...1.0 × I _{Omax} , V _I = 26 V	0.1...0.9 × V _O		1.2		ms
t _s	Start-up time		From V _I connection to V _O = 0.9 × V _{Oi}	800	1300		ms
I _O	Output current					0.2	A
P _{Omax}	Max output power			3			W
I _{lim}	Current limiting threshold ¹⁾	T _C < T _{Cmax}		0.2		0.65	A
I _{sc}	Short circuit current	V _I = 26 V			0.35		A
V _{Oac}	Output ripple & noise	I _O =I _{Omax} , T _A = 25 °C	DC... 20 MHz		60		mV _{p-p}
SVR	Supply voltage rejection (ac)	f = 100/120 Hz sine wave, 1 V _{p-p} , (SVR = 20 log (1 V _{p-p} /V _{O<p-p< sub="">))</p-p<>}			60		dB

¹⁾ At $V_{out} \leq 80\%$ of nominal the power module goes into hick up mode.

Miscellaneous

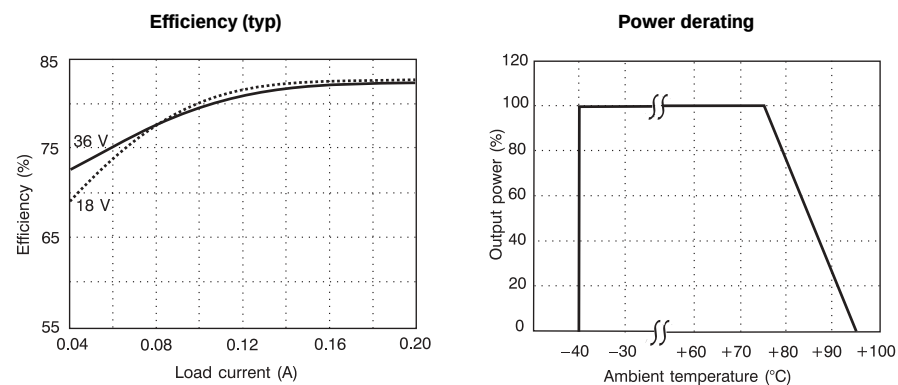

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\max}$, $V_I = 26\text{ V}$	76	82		%
P_d	Power dissipation	$I_O = I_{O\max}$, $V_I = 26\text{ V}$		0.66	0.95	W

PKV 3222 PI



Output

$T_A = +25^\circ\text{C}$, $V_I = 9\ldots 36\text{V}$ unless otherwise specified.

Characteristics		Conditions		Output 1			Output 2			Unit
				min	typ	max	min	typ	max	
V _O	Output voltage tolerance band	I _O =0.1...1.0 × I _{Omax} and long term drift		+4.9		+5.1	-4.9		-5.1	V
	Line regulation	I _O =I _{Omax}		10		25	10		25	mV
	Load regulation	I _O =0.1...1.0 × I _{Omax} , V _I = 26 V		10		50	10		50	mV
t _{tr}	Load transient recovery time	I _O = 0.1...1.0 × I _{Omax} , V _I = 26 V load step = 0.5 × I _{Omax}		300			300			μs
V _{tr}	Load transient voltage			+100			+100			mV
				-100			-100			mV
T _{coeff}	Temperature coefficient	Measured after stabilization				±0.02			±0.02	%/°C
t _r	Ramp-up time	I _O = 0.1...1.0 × I _{Omax} , V _I = 26 V	0.1...0.9 × V _O	1.2			1.2			ms
t _s	Start-up time		From V _I connection to V _O = 0.9 × V _{Oi}	800		1300	800		1300	ms
I _O	Output current					0.25			0.25	A
P _{Omax}	Max output power			1.25			1.25			W
I _{lim}	Current limiting threshold ¹⁾	T _C < T _{Cmax}		0.25		0.81	0.25		0.81	A
I _{sc}	Short circuit current	V _I = 26 V		0.25			0.25			A
V _{Oac}	Output ripple & noise	I _O =I _{Omax} , T _A = 25 °C	DC...20 MHz	60			60			mV _{p-p}
SVR	Supply voltage rejection (ac)	f = 100/120 Hz sine wave, 1V _{p-p} , (SVR = 20 log (1 V _{p-p} /V _{O<p-p< sub="">))</p-p<>}		45			45			dB

¹⁾ At $V_{O\text{out}} \leq 80\%$ of nominal the power module goes into hick up mode.

Miscellaneous

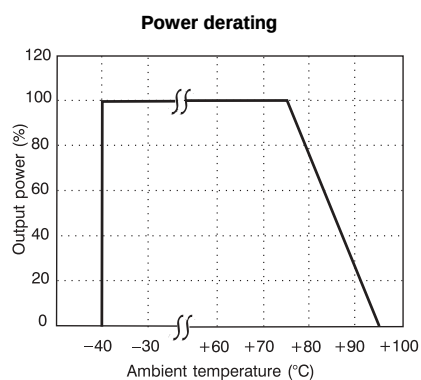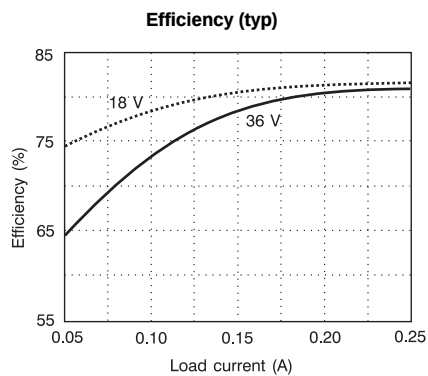

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\max}$, $V_I = 26\text{ V}$	75	82		%
P_d	Power dissipation	$I_O = I_{O\max}$, $V_I = 26\text{ V}$		0.55	0.83	W

PKV 3321 PI

Output


$T_A = +25^\circ\text{C}$, $V_I = 9...36\text{V}$ unless otherwise specified.

Characteristics		Conditions	Output 1			Output 2			Unit
			min	typ	max	min	typ	max	
V_O	Output voltage tolerance band	$I_O = 0.1...1.0 \times I_{O\max}$ and long term drift	+11.76		+12.24	-11.76		-12.24	V
	Line regulation	$I_O = I_{O\max}$	24		60	24		60	mV
	Load regulation	$I_O = 0.1...1.0 \times I_{O\max}$, $V_I = 26\text{ V}$	24		120	24		120	mV
t_{tr}	Load transient recovery time	$I_O = 0.1...1.0 \times I_{O\max}$, $V_I = 26\text{ V}$ load step = $0.5 \times I_{O\max}$	300			300			μs
V_{tr}	Load transient voltage		+150			+150			mV
			-150			-150			mV
T_{coeff}	Temperature coefficient	Measured after stabilization	± 0.02			± 0.02			%/ $^\circ\text{C}$
t_r	Ramp-up time	$I_O = 0.1...1.0 \times I_{O\max}$, $V_I = 26\text{ V}$	$0.1...0.9 \times V_O$			1.2			ms
t_s	Start-up time		From V_I connection to $V_O = 0.9 \times V_{OI}$			800 1300			ms
I_O	Output current		0.125			0.125			A
$P_{O\max}$	Max output power		1.5			1.5			W
I_{lim}	Current limiting threshold ¹⁾	$T_C < T_{C\max}$	0.125 0.400			0.125 0.400			A
I_{sc}	Short circuit current	$V_I = 26\text{ V}$	0.35			0.35			A
V_{Oac}	Output ripple & noise	$I_O = I_{O\max}$, $T_A = 25^\circ\text{C}$	DC...20 MHz			60			mV _{p-p}
SVR	Supply voltage rejection (ac)	$f = 100/120\text{ Hz}$ sine wave, $1 V_{p-p}$, (SVR = $20 \log(1 V_{p-p}/V_{Op-p})$)	45			45			dB


¹⁾ At $V_{out} \leq 80\%$ of nominal the power module goes into hick up mode.

Miscellaneous

Efficiency (typ)

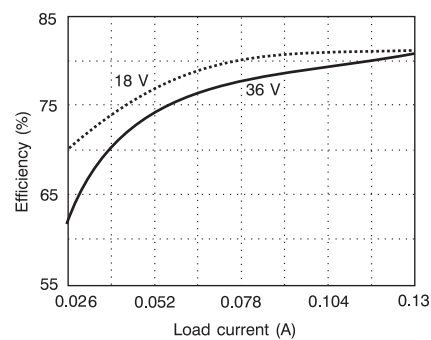

Power derating

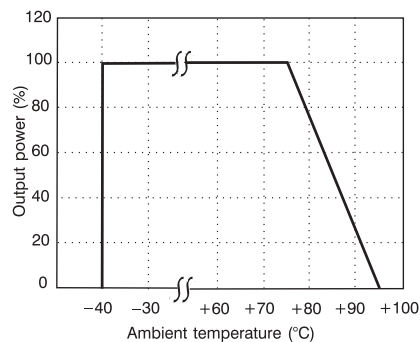

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\max}$, $V_I = 26\text{ V}$	73	82		%
P_d	Power dissipation	$I_O = I_{O\max}$, $V_I = 26\text{ V}$		0.66	1.11	W

PKV 3325 PI


Output

$T_A = +25^\circ\text{C}$, $V_I = 9\ldots36\text{V}$ unless otherwise specified.

Characteristics		Conditions		Output 1			Output 2			Unit
				min	typ	max	min	typ	max	
V _O	Output voltage tolerance band	I _O =0.1 ...1.0 × I _{O max} and long term drift		+14.7		+15.3	−14.7		−15.3	V
	Line regulation	I _O =I _{O max}		30		75	30		75	mV
	Load regulation	I _O =0.1 ...1.0 × I _{O max} , V _I = 26 V		30		150	30		150	mV
t _{tr}	Load transient recovery time	I _O = 0.1 ...1.0 × I _{O max} , V _I = 26 V load step = 0.5 × I _{O max}		300			300			μs
V _{tr}	Load transient voltage			+200			+200			mV
				−200			−200			mV
T _{coeff}	Temperature coefficient	Measured after stabilization		±0.02			±0.02			%/°C
t _r	Ramp-up time	I _O =	0.1 ...0.9 × V _O	1.2			1.2			ms
t _s	Start-up time	0.1 ...1.0 × I _{O max} , V _I = 26 V	From V _I connection to V _O = 0.9 × V _{OI}	800 1300			800 1300			ms
I _O	Output current			0.1			0.1			A
P _{O max}	Max output power			1.5			1.5			W
I _{lim}	Current limiting threshold ¹⁾	T _C < T _{C max}		0.10 0.32			0.10 0.32			A
I _{sc}	Short circuit current	V _I =26 V		0.35			0.35			A
V _{O ac}	Output ripple & noise	I _O =I _{O max} , T _A = 25 °C	DC ...20 MHz	50			50			mV _{p-p}
SVR	Supply voltage rejection (ac)	f = 100/120 Hz sine wave, 1V _{p-p} , (SVR = 20 log (1 V _{p-p} /V _{O p-p}))		45			45			dB

¹⁾ At $V_{out} \leq 80\%$ of nominal the power module goes into hick up mode.

Miscellaneous

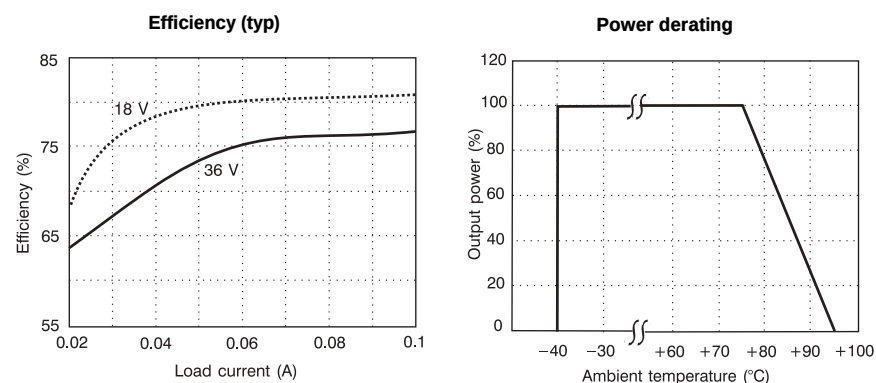

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\max}$, $V_I = 26\text{ V}$	76	80		%
P_d	Power dissipation	$I_O = I_{O\max}$, $V_I = 26\text{ V}$		0.75	0.95	W

PKV 5110 PI


Output

$T_A = +25^{\circ}\text{C}$, $V_I = 18...72\text{V}$ unless otherwise specified.

Characteristics		Conditions		Output 1			Unit
				min	typ	max	
V_O	Output voltage tolerance band	$I_O = 0.1...1.0 \times I_{O\max}$ and long term drift		3.20		3.40	V
	Line regulation	$I_O = I_{O\max}$			6.6	16.5	mV
	Load regulation	$I_O = 0.1...1.0 \times I_{O\max}$, $V_I = 53\text{V}$			6.6	33.0	mV
t_{tr}	Load transient recovery time	$I_O = 0.1...1.0 \times I_{O\max}$, $V_I = 53\text{V}$ load step = $0.5 \times I_{O\max}$			300		μs
V_{tr}	Load transient voltage				+100		mV
					-100		mV
T_{coeff}	Temperature coefficient	Measured after stabilization				± 0.02	%/ $^{\circ}\text{C}$
t_r	Ramp-up time	$I_O = 0.1...1.0 \times I_{O\max}$, $V_I = 53\text{V}$	$0.1...0.9 \times V_O$		0.5		ms
t_s	Start-up time		From V_I connection to $V_O = 0.9 \times V_{OI}$		900	1300	ms
I_O	Output current					0.5	A
$P_{O\max}$	Max output power			1.65			W
I_{lim}	Current limiting threshold ¹⁾	$T_C < T_{C\max}$		0.50		1.62	A
I_{sc}	Short circuit current	$V_I = 53\text{V}$			0.1		A
V_{Oac}	Output ripple & noise	$I_O = I_{O\max}$, $T_A = 25^{\circ}\text{C}$	DC ... 20 MHz		60		mVp-p
SVR	Supply voltage rejection (ac)	$f = 100/120\text{ Hz}$ sine wave, $1V_{p-p}$, ($\text{SVR} = 20 \log (1 V_{p-p}/V_{O(p-p)})$)			60		dB

¹⁾ At $V_{\text{out}} \leq 80\%$ of nominal the power module goes into hick up mode.

Miscellaneous

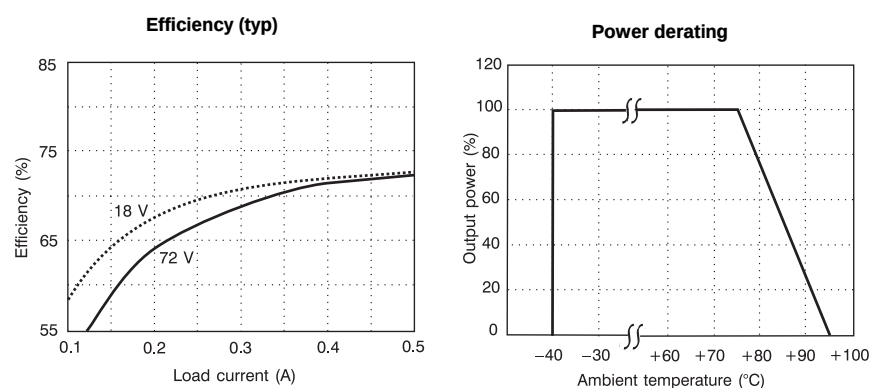

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\max}$, $V_I = 53\text{V}$	66	73		%
P_d	Power dissipation	$I_O = I_{O\max}$, $V_I = 53\text{V}$		0.61	0.85	W

PKV 5211 PI


Output

T_A = +25°C, V_I = 18...72V unless otherwise specified.

Characteristics		Conditions		Output 1			Unit
				min	typ	max	
V _O	Output voltage tolerance band	I _O =0.1...1.0 × I _{O max} and long term drift		4.90		5.10	V
	Line regulation	I _O =I _{O max}			10	25	mV
	Load regulation	I _O =0.1...1.0 × I _{O max} , V _I = 53V			10	50	mV
t _{tr}	Load transient recovery time	I _O = 0.1...1.0 × I _{O max} , V _I = 53V load step = 0.5 × I _{O max}			300		μs
V _{tr}	Load transient voltage				+100		mV
					-100		mV
T _{coeff}	Temperature coefficient	Measured after stabilization				±0.02	%/°C
t _r	Ramp-up time	I _O = 0.1...1.0 × I _{O max} ,	0.1...0.9 × V _O		0.5		ms
t _s	Start-up time	V _I = 53V	From V _I connection to V _O = 0.9 × V _{Oi}		900	1300	ms
I _O	Output current					0.5	A
P _{O max}	Max output power			2.5			W
I _{lim}	Current limiting threshold ¹⁾	T _C < T _{C max}		0.5		1.62	A
I _{sc}	Short circuit current	V _I = 53V			0.12		A
V _{O ac}	Output ripple & noise	I _O =I _{O max} , T _A = 25 °C	DC ... 20 MHz		60		mV _{p-p}
SVR	Supply voltage rejection (ac)	f = 100/120 Hz sine wave, 1V _{p-p} , (SVR = 20 log (1 V _{p-p} /V _{O p-p}))			60		dB

¹⁾ At V_{out} ≤ 80% of nominal the power module goes into hick up mode.

Miscellaneous

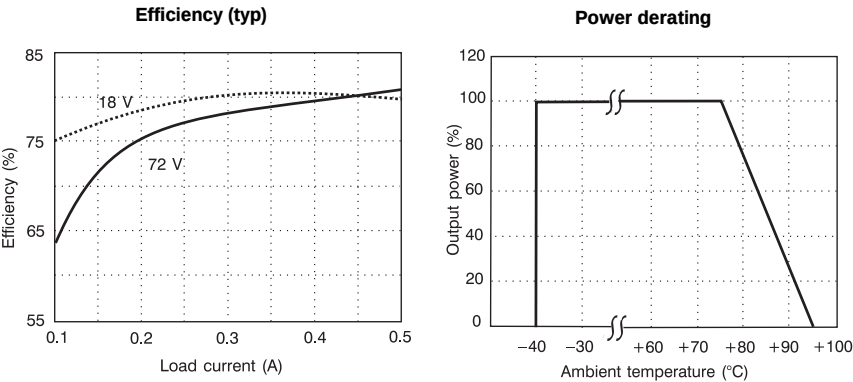

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	I _O = I _{O max} , V _I = 53V	75	82		%
P _d	Power dissipation	I _O = I _{O max} , V _I = 53V		0.55	0.84	W

PKV 5313 PI


Output

$T_A = +25^\circ\text{C}$, $V_I = 18...72\text{V}$ unless otherwise specified.

Characteristics		Conditions		Output 1			Unit
				min	typ	max	
V _O	Output voltage tolerance band	I _O =0.1...1.0 × I _{O max} and long term drift		11.76		12.24	V
	Line regulation	I _O =I _{O max}			24	60	mV
	Load regulation	I _O =0.1...1.0 × I _{O max} , V _I = 53 V			24	120	mV
t _{tr}	Load transient recovery time	I _O = 0.1...1.0 × I _{O max} , V _I = 53 V load step = 0.5 × I _{O max}			300		μs
V _{tr}	Load transient voltage				+150		mV
					-150		mV
T _{coeff}	Temperature coefficient	Measured after stabilization				± 0.02	%/°C
t _r	Ramp-up time	I _O = 0.1...1.0 × I _{O max} , V _I = 53 V	0.1...0.9 × V _O		1.2		ms
t _s	Start-up time		From V _I connection to V _O = 0.9 × V _{Oi}		900	1300	ms
I _O	Output current					0.25	A
P _{O max}	Max output power			3			W
I _{lim}	Current limiting threshold ¹⁾	T _C < T _{C max}		0.25		0.81	A
I _{sc}	Short circuit current	V _I =53 V			0.17		A
V _{O ac}	Output ripple & noise	I _O =I _{O max} , T _A = 25 °C	DC... 20 MHz		60		mV _{p-p}
SVR	Supply voltage rejection (ac)	f = 100/120 Hz sine wave, 1 V _{p-p} , (SVR = 20 log (1 V _{p-p} /V _{O p-p}))			60		dB

¹⁾ At $V_{\text{out}} \leq 80\%$ of nominal the power module goes into hick up mode.

Miscellaneous

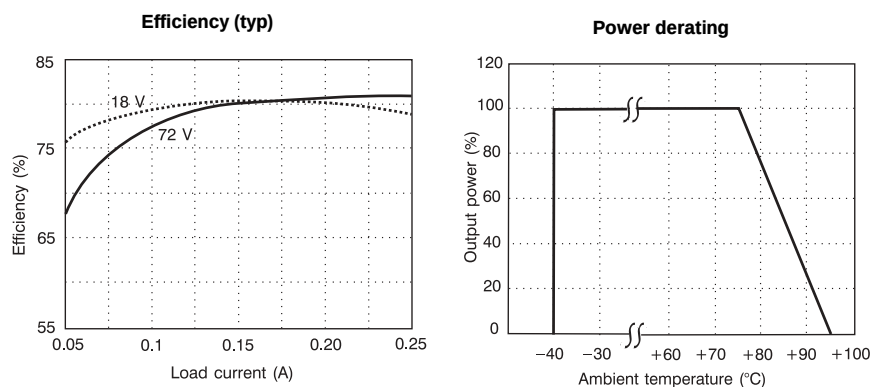

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\max}$, $V_I = 53\text{V}$	76	82		%
P_d	Power dissipation	$I_O = I_{O\max}$, $V_I = 53\text{V}$		0.66	0.95	W

PKV 5315 PI


Output

T_A = +25°C, V_I = 18...72V unless otherwise specified.

Characteristics		Conditions		Output 1			Unit
				min	typ	max	
V _O	Output voltage tolerance band	I _O =0.1...1.0 × I _{O max} and long term drift		14.7		15.3	V
	Line regulation	I _O =I _{O max}		30		75	mV
	Load regulation	I _O =0.1...1.0 × I _{O max} , V _I = 53V		30		150	mV
t _{tr}	Load transient recovery time	I _O = 0.1...1.0 × I _{O max} , V _I = 53V load step = 0.5 × I _{O max}		300			μs
V _{tr}	Load transient voltage			+200			mV
				−200			mV
T _{coeff}	Temperature coefficient	Measured after stabilization				±0.02	%/°C
t _r	Ramp-up time	I _O = 0.1...1.0 × I _{O max} , V _I = 53V	0.1...0.9 × V _O	1.2			ms
t _s	Start-up time		From V _I connection to V _O = 0.9 × V _{Oi}	900	1300		ms
I _O	Output current					0.2	A
P _{O max}	Max output power			3			W
I _{lim}	Current limiting threshold ¹⁾	T _C < T _{C max}		0.20		0.65	A
I _{sc}	Short circuit current	V _I = 53V		0.17			A
V _{O ac}	Output ripple & noise	I _O =I _{O max} , T _A = 25 °C	DC... 20 MHz	60			mVp-p
SVR	Supply voltage rejection (ac)	f = 100/120 Hz sine wave, 1 Vp-p, (SVR = 20 log (1 Vp-p/VOp-p))		60			dB

1) At V_{out} ≤ 80% of nominal the power module goes into hick up mode.

Miscellaneous

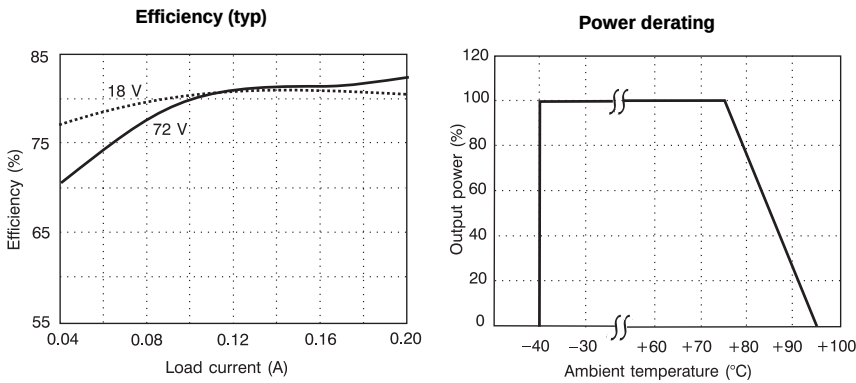

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	I _O = I _{O max} , V _I = 53V	76	82		%
P _d	Power dissipation	I _O = I _{O max} , V _I = 53V		0.66	0.95	W

PKV 5222 PI


Output

$T_A = +25^\circ\text{C}$, $V_I = 18...72\text{V}$ unless otherwise specified.

Characteristics		Conditions	Output 1			Output 2			Unit
			min	typ	max	min	typ	max	
V_O	Output voltage tolerance band	$I_O = 0.1 \dots 1.0 \times I_{O\text{max}}$ and long term drift	+4.9		+5.1	-4.9		-5.1	V
	Line regulation	$I_O = I_{O\text{max}}$		10	25		10	25	mV
	Load regulation	$I_O = 0.1 \dots 1.0 \times I_{O\text{max}}$, $V_I = 53\text{ V}$		10	50		10	50	mV
t_{tr}	Load transient recovery time	$I_O = 0.1 \dots 1.0 \times I_{O\text{max}}$, $V_I = 53\text{ V}$ load step = $0.5 \times I_{O\text{max}}$		300			300		μs
V_{tr}	Load transient voltage			+100			+100		mV
				-100			-100		mV
T_{coeff}	Temperature coefficient	Measured after stabilization			± 0.02			± 0.02	%/ $^\circ\text{C}$
t_r	Ramp-up time	$I_O = 0.1 \dots 1.0 \times I_{O\text{max}}$, $V_I = 53\text{ V}$		1.2			1.2		ms
t_s	Start-up time	From V_I connection to $V_O = 0.9 \times V_{OI}$		900	1300		900	1300	ms
I_O	Output current			0.25			0.25		A
$P_{O\text{max}}$	Max output power			1.25			1.25		W
I_{lim}	Current limiting threshold ¹⁾	$T_C < T_{C\text{max}}$		0.25	0.81		0.25	0.81	A
I_{sc}	Short circuit current	$V_I = 53\text{ V}$		0.12			0.12		A
V_{Oac}	Output ripple & noise	$I_O = I_{O\text{max}}$, $T_A = 25^\circ\text{C}$		60			60		mV _{p-p}
SVR	Supply voltage rejection (ac)	$f = 100/120\text{ Hz}$ sine wave, $1 V_{p-p}$, ($\text{SVR} = 20 \log (1 V_{p-p}/V_{O(p-p)})$)		45			45		dB

¹⁾ At $V_{\text{out}} \leq 80\%$ of nominal the power module goes into hick up mode.

Miscellaneous

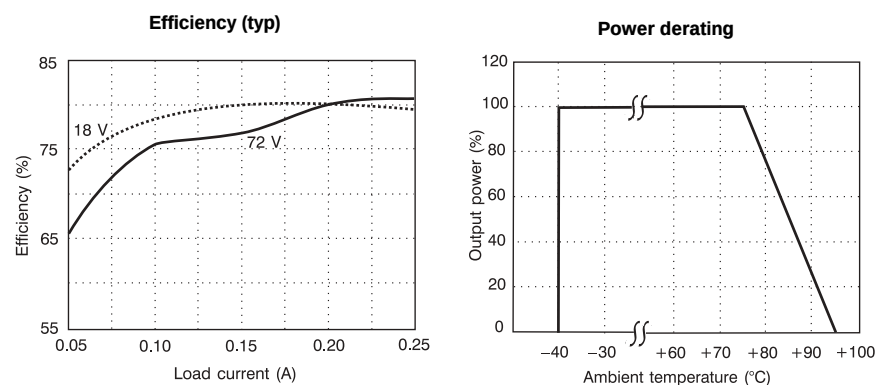

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\text{max}}$, $V_I = 53\text{ V}$	75	82		%
P_d	Power dissipation	$I_O = I_{O\text{max}}$, $V_I = 53\text{ V}$		0.55	0.83	W

PKV 5321 PI


Output

$T_A = +25^\circ\text{C}$, $V_I = 18\ldots 72\text{V}$ unless otherwise specified.

Characteristics		Conditions		Output 1			Output 2			Unit
				min	typ	max	min	typ	max	
V _O	Output voltage tolerance band	I _O =0.1 ... 1.0 × I _{Omax} and long term drift		+11.76		+12.24	-11.76		-12.24	V
	Line regulation	I _O =I _{Omax}		24		60	24		60	mV
	Load regulation	I _O =0.1 ... 1.0 × I _{Omax} , V _I = 53 V		24		120	24		120	mV
t _{tr}	Load transient recovery time	I _O = 0.1 ... 1.0 × I _{Omax} , V _I = 53 V load step = 0.5 × I _{Omax}		300			300			μs
V _{tr}	Load transient voltage			+150			+150			mV
				-150			-150			mV
T _{coeff}	Temperature coefficient	Measured after stabilization		±0.02			±0.02			%/°C
t _r	Ramp-up time	I _O =	0.1 ... 0.9 × V _O	1.2			1.2			ms
t _s	Start-up time	0.1 ... 1.0 × I _{Omax} , V _I = 53 V	From V _I connection to V _O = 0.9 × V _{Oi}	900		1300	900		1300	ms
I _O	Output current			0.125			0.125			A
P _{Omax}	Max output power			1.5			1.5			W
I _{lim}	Current limiting threshold ¹⁾	T _C < T _{Cmax}		0.125		0.400	0.125		0.400	A
I _{sc}	Short circuit current	V _I =53 V		0.17			0.17			A
V _{Oac}	Output ripple & noise	I _O =I _{Omax} , T _A = 25 °C	DC ...20 MHz	60			60			mV _{p-p}
SVR	Supply voltage rejection (ac)	f = 100/120 Hz sine wave, 1 V _{p-p} , (SVR = 20 log (1 V _{p-p} /V _{O(p-p)}))		45			45			dB

¹⁾ At $V_{\text{out}} \leq 80\%$ of nominal the power module goes into hick up mode.

Miscellaneous

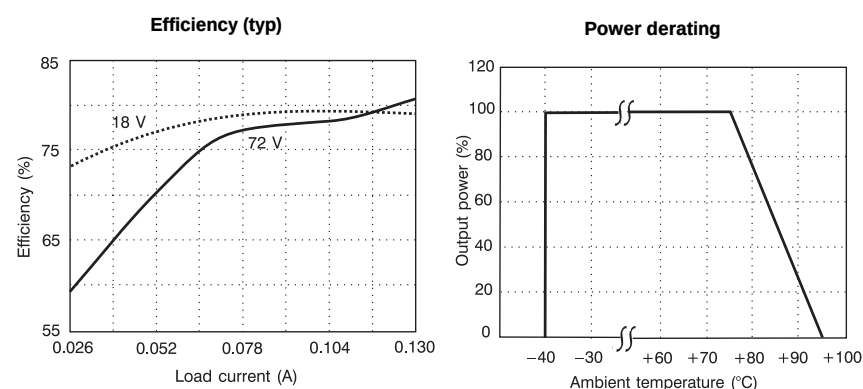

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\text{max}}$, $V_I = 53\text{ V}$	73	82		%
P_d	Power dissipation	$I_O = I_{O\text{max}}$, $V_I = 53\text{ V}$		0.66	1.11	W

PKV 5325 PI


Output

$T_A = +25^\circ\text{C}$, $V_I = 18...72\text{V}$ unless otherwise specified.

Characteristics		Conditions	Output 1			Output 2			Unit
			min	typ	max	min	typ	max	
V_O	Output voltage tolerance band	$I_O = 0.1 \dots 1.0 \times I_{O\text{max}}$ and long term drift	+14.7		+15.3	-14.7		-15.3	V
	Line regulation	$I_O = I_{O\text{max}}$		30	75		30	75	mV
	Load regulation	$I_O = 0.1 \dots 1.0 \times I_{O\text{max}}$, $V_I = 53\text{ V}$		30	150		30	150	mV
t_{tr}	Load transient recovery time	$I_O = 0.1 \dots 1.0 \times I_{O\text{max}}$, $V_I = 53\text{ V}$ load step = $0.5 \times I_{O\text{max}}$		300			300		μs
V_{tr}	Load transient voltage			+200			+200		mV
				-200			-200		mV
T_{coeff}	Temperature coefficient	Measured after stabilization		± 0.02			± 0.02		%/ $^\circ\text{C}$
t_r	Ramp-up time	$I_O = 0.1 \dots 1.0 \times I_{O\text{max}}$, $V_I = 53\text{ V}$		1.2			1.2		ms
t_s	Start-up time	From V_I connection to $V_O = 0.9 \times V_{OI}$		900	1300		900	1300	ms
I_O	Output current			0.1			0.1		A
$P_{O\text{max}}$	Max output power			1.5			1.5		W
I_{lim}	Current limiting threshold ¹⁾	$T_C < T_{C\text{max}}$		0.10	0.32		0.10	0.32	A
I_{sc}	Short circuit current	$V_I = 53\text{ V}$		0.17			0.17		A
V_{Oac}	Output ripple & noise	$I_O = I_{O\text{max}}$, $T_A = 25^\circ\text{C}$		60			60		mV _{p-p}
SVR	Supply voltage rejection (ac)	$f = 100/120\text{ Hz}$ sine wave, $1 V_{p-p}$, ($\text{SVR} = 20 \log(1 V_{p-p}/V_{O(p-p)})$)		45			45		dB

¹⁾ At $V_{\text{out}} \leq 80\%$ of nominal the power module goes into hick up mode.

Miscellaneous

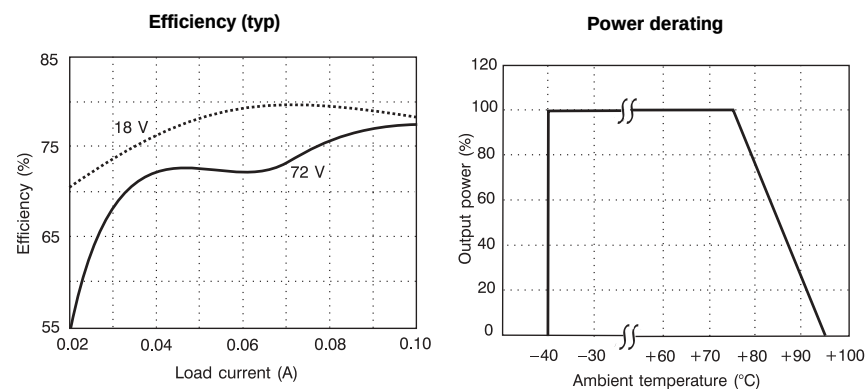

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\text{max}}$, $V_I = 53\text{ V}$	76	82		%
P_d	Power dissipation	$I_O = I_{O\text{max}}$, $V_I = 53\text{ V}$		0.66	0.95	W

EMC Specifications

The PKV DC/DC power module is mounted on a double sided printed circuit board (PB) with groundplane during EMC measurements. The fundamental switching frequency is approx. 200 kHz.

The PKV series has a good input filter and will only need a simple filter to meet conducted noise according to EN 55022 level B. Fig. 1 shows an example of filter and the results for this filter is shown below.



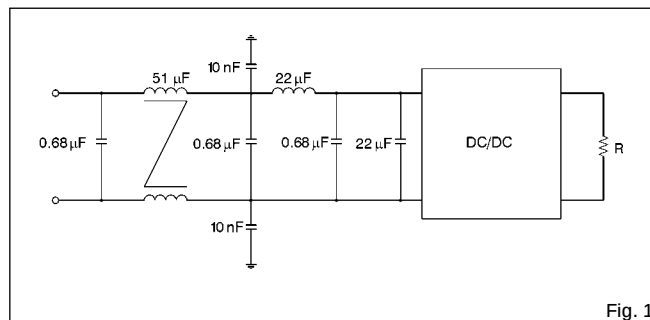


Fig. 1


Conducted noise

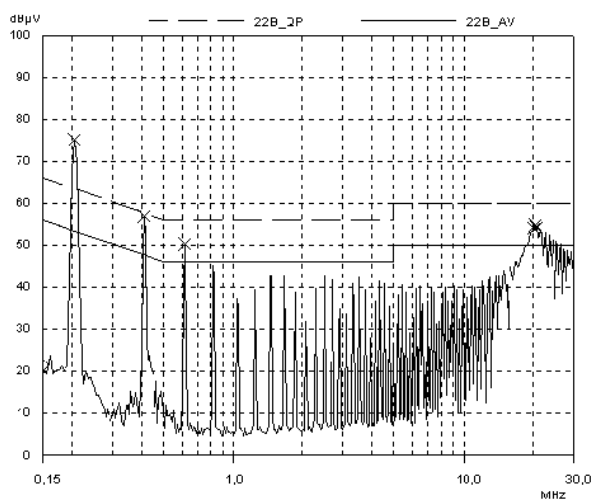


PKV 3211 without filter

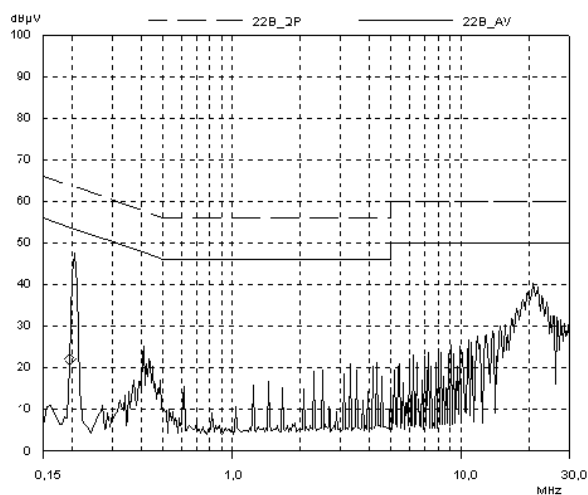


PKV 3211 with filter

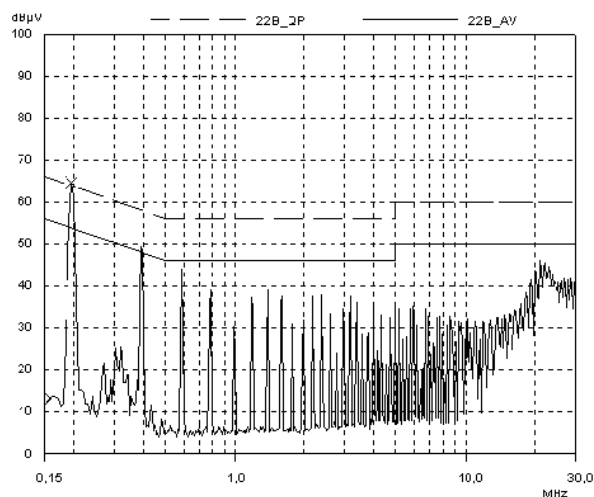

PKV 5211 without filter

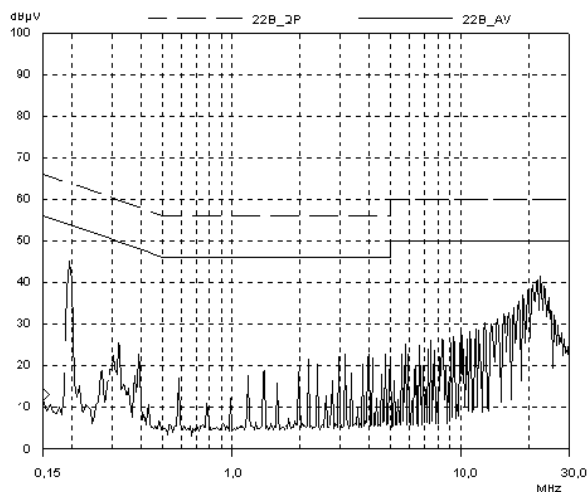

PKV 5211 with filter

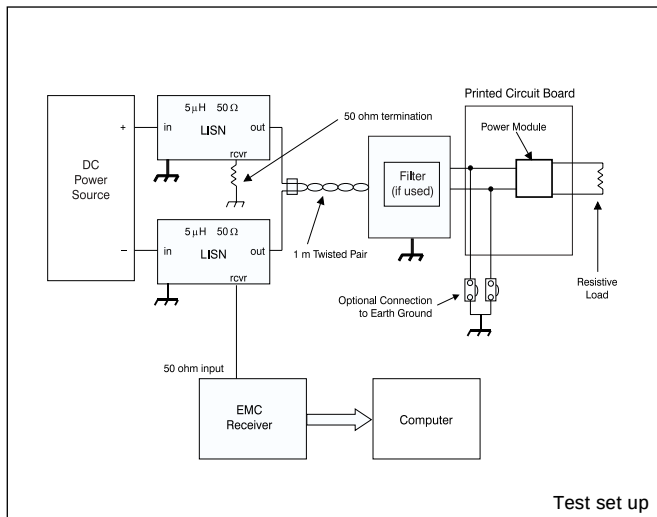

Miscellaneous

Soldering Information

The PKV Series DC/DC converters are intended for through hole mounting on a PCB. When wave soldering is used max temperature on the pins are specified to 230°C for 10 seconds. Maximum preheat rate of 2°C/s is suggested. When hand soldering is used a thermocouple needs to be mounted on the DC/DC converter pins to verify that pin temperatures does not exceed 300°C for longer time than 10 seconds with the used soldering tools.

No-clean flux is recommended to avoid entrapment of cleaning fluids in cavities inside of the DC/DC power module. The residues may affect long time reliability and isolation voltage.

Delivery Package Information

The PKV series DC/DC converters are delivered in tubes with a lenght of 384 mm (15.1 in)

Tube Specification

Material:	PVC
Max surface resistance:	10 to1000 MOhm/sq
Color:	Transparent
Capacity:	10 pcs/tube
Weight:	typ 160 g
End stops	Pins

Quality

Reliability

According to MIL-HDBK-217F the calculated MTBF value at 100% load (from PKV 5211 PI) at the following ambient temperatures will be approx.:

Tamb	Hours
0 °C	2.7 million
10 °C	1.5 million
25 °C	650 000
40 °C	276 000
60 °C	88 000
75 °C	37 000

At 80–100% load the case temperature will be approx. 15–20 °C higher than the ambient temperature.

Quality Statement

The PKV series DC/DC converters are designed and manufactured in an industrial environment where quality systems and methods like ISO 9000 and SPC are intensively in use to boost the continuous improvements strategy. Infant mortality or early failures in the products are screened out by a burn-in procedure.

Warranty

Ericsson Power Modules warrants to the original purchaser or end user that the product conform to this Data Sheet and are free from material and workmanship defects for a period of five (5) years from the date of manufacture, if the product is used within specified conditions and not opened. In case the product is discontinued, claims will be accepted up to three (3) years from the date of the discontinuation. For additional details on this limited warranty we refer to Ericsson Power Modules "General Terms and Conditions of Sales", or individual contract documents.

Limitation of liability

Ericsson Power Modules does not make any other warranties, expressed or implied including any warranty of merchantability or fitness for a particular purpose (including, but not limited to, use in life support applications, where malfunctions of product can cause injury to a person's health or life).

Product Program

V_I	V_O/I_O max	P_O max	Ordering No.
12/24 V	3.3 V/500 mA	1.65 W	PKV 3110 PI
	5 V/500 mA	2.50 W	PKV 3211 PI
	12 V/250 mA	3.00 W	PKV 3313 PI
	15 V/200 mA	3.00 W	PKV 3315 PI
	± 5V/250 mA	2.50 W	PKV 3222 PI
	±12V/125 mA	3.00 W	PKV 3321 PI
	±15V/100 mA	3.00 W	PKV 3325 PI
48/60 V	3.3 V/500 mA	1.65 W	PKV 5110 PI
	5 V/500 mA	2.50 W	PKV 5211 PI
	12 V/250 mA	3.00 W	PKV 5313 PI
	15 V/200 mA	3.00 W	PKV 5315 PI
	± 5 V/250 mA	2.50 W	PKV 5222 PI
	±12 V/125 mA	3.00 W	PKV 5321 PI
	±15 V/100 mA	3.00 W	PKV 5325 PI

Information given in this data sheet is believed to be accurate and reliable. No responsibility is assumed for the consequences of its use nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Ericsson Power Modules. These products are sold only according to Ericsson Power Modules' general conditions of sale, unless otherwise confirmed in writing. Specifications subject to change without notice.

Ericsson Power Modules

SE-126 25 Stockholm, Sweden

Telephone: +46 8 568 69620

For local sales contacts, please refer to our website

www.ericsson.com/powermodules

or call: Int +46 8 568 69620, Fax: +46 8 568 69599

Americas

Ericsson Inc., Power Modules

+1-972-583-5254, +1-972-583-6910

Asia/Pacific

Ericsson Ltd.

+852-2590-2453

The latest and most complete information can be found on our website.

Data Sheet

EN/LZT 146 37 R2D

© Ericsson Power Modules AB, September 2004