


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD



KC-79-274-M06

REVISIONS

ISSUE	CHANGES
3	CN 36495 E REDRAWN ME 08/04/95

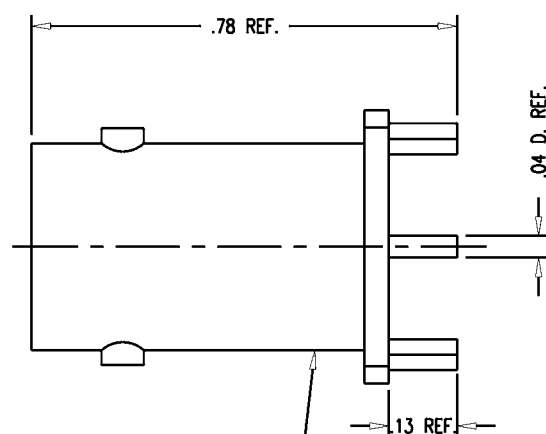

STAMP: KINGS KC-79-274-M06

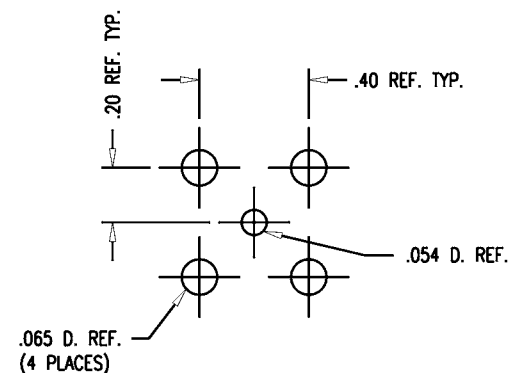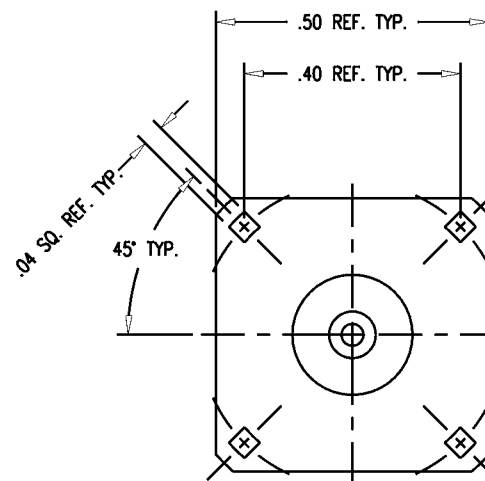

MOUNTING HOLE PATTERN

NOTES:

- INTERFACE PER MIL-STD-348, FIG. 301-2.
- MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
CENTER CONTACT: BER. COPPER, ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16
- FINISHES:
CENTER CONTACT: HARD GOLD PLT. PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 Ω
VOLTAGE RATING: 500 VOLTS RMS
FREQUENCY RANGE: DC TO 4 GHz

QGS0733

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

RECEPTACLE, PCB, BNC

DRAWN	ME	DATE	08/04/95
DESIGN	MJB	DATE	08/04/95
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KC-79-274-M06

GSD