

Popular Safety Limit Switches Providing a Full Lineup Conforming to International Standards

- Lineup includes models with 1NC/1NO, 2NC, 2NC/1NO and 3NC contact forms.
(Slow-action models with MBB contacts are available.)
- M12-connector models are also available, saving on labor and simplifying replacement.
- Standardized gold-clad contacts provide high contact reliability.
Can be used with both standard loads and microloads.
- Conforms to EN115-1, EN81-1, and EN81-2 (slow-action models only).
- Certified standards: UL, EN (TÜV), and CCC
- Conforms to ISO 14119

 Be sure to read the "Safety Precautions" on page 17.

Note: Contact your sales representative for details on models with safety standard certification.



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

Model Number Structure

Model Number Legend

1-Conduit Models

D4N-□□□
1 2 3

1. Conduit size

- 1: Pg13.5
- 2: G1/2
- 4: M20
- 9: M12 connector

2. Built-in Switch

- 1: 1NC/1NO (snap-action)
- 2: 2NC (snap-action)
- A: 1NC/1NO (slow-action)
- B: 2NC (slow-action)
- C: 2NC/1NO (slow-action)
- D: 3NC (slow-action)
- E: 1NC/1NO (MBB contact) (slow-action)
- F: 2NC/1NO (MBB contact) (slow-action)

3. Head and Actuator

- 20: Roller lever (resin lever, resin roller)
- 22: Roller lever (metal lever, resin roller)
- 25: Roller lever (metal lever, metal roller)
- 26: Roller lever (metal lever, bearing roller)
- 2G: Adjustable roller lever, form lock (metal lever, resin roller)
- 2H: Adjustable roller lever, form lock (metal lever, rubber roller)
- 31: Top Plunger
- 32: Top Roller Plunger
- 62: One-way roller arm lever (horizontal)
- 72: One-way roller arm lever (vertical)
- 80: Cat whisker
- 87: Plastic rod
- RE: Fork lever lock (right operation)
- LE: Fork lever lock (left operation)

2-Conduit Models

D4N-□□□
1 2 3

1. Conduit size

- 6: G1/2
- 8: M20

2. Built-in Switch

- 1: 1NC/1NO (snap-action)
- 2: 2NC (snap-action)
- A: 1NC/1NO (slow-action)
- B: 2NC (slow-action)
- C: 2NC/1NO (slow-action)
- D: 3NC (slow-action)
- E: 1NC/1NO (MBB contact) (slow-action)
- F: 2NC/1NO (MBB contact) (slow-action)

3. Head and Actuator

- 20: Roller lever (resin lever, resin roller)
- 22: Roller lever (metal lever, resin roller)
- 25: Roller lever (metal lever, metal roller)
- 26: Roller lever (metal lever, bearing roller)
- 2G: Adjustable roller lever, form lock (metal lever, resin roller)
- 2H: Adjustable roller lever, form lock (metal lever, rubber roller)
- 31: Top Plunger
- 32: Top Roller Plunger
- 62: One-way roller arm lever (horizontal)
- 72: One-way roller arm lever (vertical)

Ordering Information

List of Models

Consult with your OMRON representative when ordering any models that are not listed in this table.

Switches with Two Contacts (with Direct Opening Mechanism)

Actuator	Conduit size	Built-in switch mechanism								
		1NC/1NO (Snap-action)		2NC (Snap-action)		1NC/1NO (Slow-action)		2NC (Slow-action)		
		Model	Direct opening	Model	Direct opening	Model	Direct opening	Model	Direct opening	
Roller lever (resin lever, resin roller)	1-conduit	Pg13.5	D4N-1120	→	D4N-1220	→	D4N-1A20	→	D4N-1B20	→
		G1/2	D4N-2120		D4N-2220		D4N-2A20		D4N-2B20	
		M20	D4N-4120		D4N-4220		D4N-4A20		D4N-4B20	
		M12 connector	D4N-9120		D4N-9220		D4N-9A20		D4N-9B20	
	2-conduit	G1/2	D4N-6120	→	D4N-6220	→	D4N-6A20	→	D4N-6B20	
		M20	D4N-8120		D4N-8220		D4N-8A20		D4N-8B20	
		Pg13.5	D4N-1122	→	D4N-1222	→	D4N-1A22	→	D4N-1B22	
		G1/2	D4N-2122		D4N-2222		D4N-2A22		D4N-2B22	
Roller lever (metal lever, resin roller)	1-conduit	M20	D4N-4122		D4N-4222		D4N-4A22		D4N-4B22	→
		M12 connector	D4N-9122		D4N-9222		D4N-9A22		D4N-9B22	
		G1/2	D4N-6122	→	D4N-6222	→	D4N-6A22	→	D4N-6B22	
		M20	D4N-8122		D4N-8222		D4N-8A22		D4N-8B22	
	2-conduit	Pg13.5	D4N-1125	→	D4N-1225	→	D4N-1A25	→	D4N-1B25	
		G1/2	D4N-2125		D4N-2225		D4N-2A25		D4N-2B25	
		M20	D4N-4125		D4N-4225		D4N-4A25		D4N-4B25	
		M12 connector	D4N-9125		D4N-9225		D4N-9A25		D4N-9B25	
Roller lever (metal lever, bearing roller)	1-conduit	Pg13.5	D4N-1126	→	D4N-1226	→	D4N-1A26	→	D4N-1B26	→
		G1/2	D4N-2126		D4N-2226		D4N-2A26		D4N-2B26	
		M20	D4N-4126		D4N-4226		D4N-4A26		D4N-4B26	
		M12 connector	D4N-9126		D4N-9226		D4N-9A26		D4N-9B26	
	2-conduit	Pg13.5	D4N-112G	→	D4N-122G	→	D4N-1A2G	→	D4N-1B2G	
		G1/2	D4N-212G		D4N-222G		D4N-2A2G		D4N-2B2G	
		M20	D4N-412G		D4N-422G		D4N-4A2G		D4N-4B2G	
		M12 connector	D4N-912G		D4N-922G		D4N-9A2G		D4N-9B2G	
Adjustable roller lever, form lock (metal lever, resin roller)	1-conduit	G1/2	D4N-612G	→	D4N-622G	→	D4N-6A2G	→	D4N-6B2G	→
		M20	D4N-812G		D4N-822G		D4N-8A2G		D4N-8B2G	
		Pg13.5	D4N-112H	→	D4N-122H	→	D4N-1A2H	→	D4N-1B2H	
		G1/2	D4N-212H		D4N-222H		D4N-2A2H		D4N-2B2H	
	2-conduit	M20	D4N-412H		D4N-422H		D4N-4A2H		D4N-4B2H	
		M12 connector	D4N-912H		D4N-922H		D4N-9A2H		D4N-9B2H	
		G1/2	D4N-612H	→	D4N-622H	→	D4N-6A2H	→	D4N-6B2H	
		M20	D4N-812H		D4N-822H		D4N-8A2H		D4N-8B2H	
Adjustable roller lever, form lock (metal lever, rubber roller)	1-conduit	Pg13.5	D4N-112H	→	D4N-122H	→	D4N-1A2H	→	D4N-1B2H	→
		G1/2	D4N-212H		D4N-222H		D4N-2A2H		D4N-2B2H	
		M20	D4N-412H		D4N-422H		D4N-4A2H		D4N-4B2H	
		M12 connector	D4N-912H		D4N-922H		D4N-9A2H		D4N-9B2H	
	2-conduit	G1/2	D4N-612H	→	D4N-622H	→	D4N-6A2H	→	D4N-6B2H	→
		M20	D4N-812H		D4N-822H		D4N-8A2H		D4N-8B2H	
		Pg13.5	D4N-1131	→	D4N-1231	→	D4N-1A31	→	D4N-1B31	→
		G1/2	D4N-2131		D4N-2331		D4N-2A31		D4N-2B31	
Plunger	1-conduit	M20	D4N-4131		D4N-4331		D4N-4A31		D4N-4B31	
		M12 connector	D4N-9131		D4N-9331		D4N-9A31		D4N-9B31	
		G1/2	D4N-6131	→	D4N-6331	→	D4N-6A31	→	D4N-6B31	→
		M20	D4N-8131		D4N-8331		D4N-8A31		D4N-8B31	
	2-conduit	Pg13.5	D4N-1132	→	D4N-1232	→	D4N-1A32	→	D4N-1B32	→
		G1/2	D4N-2132		D4N-2332		D4N-2A32		D4N-2B32	
		M20	D4N-4132		D4N-4332		D4N-4A32		D4N-4B32	
		M12 connector	D4N-9132		D4N-9332		D4N-9A32		D4N-9B32	
Roller plunger	1-conduit	G1/2	D4N-6132	→	D4N-6332	→	D4N-6A32	→	D4N-6B32	→
		M20	D4N-8132		D4N-8332		D4N-8A32		D4N-8B32	
		Pg13.5	D4N-1162	→	D4N-1262	→	D4N-1A62	→	D4N-1B62	→
		G1/2	D4N-2162		D4N-2262		D4N-2A62		D4N-2B62	
	2-conduit	M20	D4N-4162		D4N-4262		D4N-4A62		D4N-4B62	
		M12 connector	D4N-9162		D4N-9262		D4N-9A62		D4N-9B62	
		G1/2	D4N-6162	→	D4N-6262	→	D4N-6A62	→	D4N-6B62	→
		M20	D4N-8162		D4N-8262		D4N-8A62		D4N-8B62	
One-way roller arm lever (horizontal)	1-conduit	Pg13.5	D4N-1162	→	D4N-1262	→	D4N-1A62	→	D4N-1B62	→
		G1/2	D4N-2162		D4N-2262		D4N-2A62		D4N-2B62	
		M20	D4N-4162		D4N-4262		D4N-4A62		D4N-4B62	
		M12 connector	D4N-9162		D4N-9262		D4N-9A62		D4N-9B62	
	2-conduit	G1/2	D4N-6162	→	D4N-6262	→	D4N-6A62	→	D4N-6B62	→
		M20	D4N-8162		D4N-8262		D4N-8A62		D4N-8B62	
		Pg13.5	D4N-1172	→	D4N-1272	→	D4N-1A72	→	D4N-1B72	→
		G1/2	D4N-2172		D4N-2272		D4N-2A72		D4N-2B72	
One-way roller arm lever (vertical)	1-conduit	M20	D4N-4172		D4N-4272		D4N-4A72		D4N-4B72	→
		M12 connector	D4N-9172		D4N-9272		D4N-9A72		D4N-9B72	
		G1/2	D4N-6172	→	D4N-6272	→	D4N-6A72	→	D4N-6B72	→
		M20	D4N-8172		D4N-8272		D4N-8A72		D4N-8B72	

Switches with Three Contacts and MBB Contacts (with Direct Opening Mechanism)

Actuator	Conduit size	Built-in switch mechanism							
		2NC/1NO (Slow-action)		3NC (Slow-action)		1NC/1NO MBB (Slow-action)		2NC/1NO MBB (Slow-action)	
		Model	Direct opening	Model	Direct opening	Model	Direct opening	Model	Direct opening
Roller lever (resin lever, resin roller)	1-conduit	Pg13.5	D4N-1C20		D4N-1D20		D4N-1E20		D4N-1F20
		G1/2	D4N-2C20		D4N-2D20		D4N-2E20		D4N-2F20
		M20	D4N-4C20		D4N-4D20		D4N-4E20		D4N-4F20
		M12 connector	---		---		D4N-9E20		---
	2-conduit	G1/2	D4N-6C20		D4N-6D20		D4N-6E20		D4N-6F20
		M20	D4N-8C20		D4N-8D20		D4N-8E20		D4N-8F20
		Pg13.5	D4N-1C22		D4N-1D22		D4N-1E22		D4N-1F22
		G1/2	D4N-2C22		D4N-2D22		D4N-2E22		D4N-2F22
Roller lever (metal lever, resin roller)	1-conduit	M20	D4N-4C22		D4N-4D22		D4N-4E22		D4N-4F22
		M12 connector	---		---		D4N-9E22		---
		G1/2	D4N-6C22		D4N-6D22		D4N-6E22		D4N-6F22
		M20	D4N-8C22		D4N-8D22		D4N-8E22		D4N-8F22
	2-conduit	Pg13.5	D4N-1C25		D4N-1D25		D4N-1E25		D4N-1F25
		G1/2	D4N-2C25		D4N-2D25		D4N-2E25		D4N-2F25
		M20	D4N-4C25		D4N-4D25		D4N-4E25		D4N-4F25
		M12 connector	---		---		D4N-9E25		---
Roller lever (metal lever, bearing roller)	1-conduit	Pg13.5	D4N-1C26		D4N-1D26		D4N-1E26		D4N-1F26
		G1/2	D4N-2C26		D4N-2D26		D4N-2E26		D4N-2F26
		M20	D4N-4C26		D4N-4D26		D4N-4E26		D4N-4F26
		M12 connector	---		---		D4N-9E26		---
	2-conduit	Pg13.5	D4N-1C2G		D4N-1D2G		D4N-1E2G		D4N-1F2G
		G1/2	D4N-2C2G		D4N-2D2G		D4N-2E2G		D4N-2F2G
		M20	D4N-4C2G		D4N-4D2G		D4N-4E2G		D4N-4F2G
		M12 connector	---		---		D4N-9E2G		---
Adjustable roller lever, form lock (metal lever, resin roller)	1-conduit	G1/2	D4N-6C2G		D4N-6D2G		D4N-6E2G		D4N-6F2G
		M20	D4N-8C2G		D4N-8D2G		D4N-8E2G		D4N-8F2G
		Pg13.5	D4N-1C2H		D4N-1D2H		D4N-1E2H		D4N-1F2H
		G1/2	D4N-2C2H		D4N-2D2H		D4N-2E2H		D4N-2F2H
	2-conduit	M20	D4N-4C2H		D4N-4D2H		D4N-4E2H		D4N-4F2H
		M12 connector	---		---		D4N-9E2H		---
		G1/2	D4N-6C2H		D4N-6D2H		D4N-6E2H		D4N-6F2H
		M20	D4N-8C2H		D4N-8D2H		D4N-8E2H		D4N-8F2H
Adjustable roller lever, form lock (metal lever, rubber roller)	1-conduit	Pg13.5	D4N-1C2H		D4N-1D2H		D4N-1E2H		D4N-1F2H
		G1/2	D4N-2C2H		D4N-2D2H		D4N-2E2H		D4N-2F2H
		M20	D4N-4C2H		D4N-4D2H		D4N-4E2H		D4N-4F2H
		M12 connector	---		---		D4N-9E2H		---
	2-conduit	G1/2	D4N-6C2H		D4N-6D2H		D4N-6E2H		D4N-6F2H
		M20	D4N-8C2H		D4N-8D2H		D4N-8E2H		D4N-8F2H
		Pg13.5	D4N-1C31		D4N-1D31		D4N-1E31		D4N-1F31
		G1/2	D4N-2C31		D4N-2D31		D4N-2E31		D4N-2F31
Plunger	1-conduit	M20	D4N-4C31		D4N-4D31		D4N-4E31		D4N-4F31
		M12 connector	---		---		D4N-9E31		---
		G1/2	D4N-6C31		D4N-6D31		D4N-6E31		D4N-6F31
		M20	D4N-8C31		D4N-8D31		D4N-8E31		D4N-8F31
	2-conduit	Pg13.5	D4N-1C32		D4N-1D32		D4N-1E32		D4N-1F32
		G1/2	D4N-2C32		D4N-2D32		D4N-2E32		D4N-2F32
		M20	D4N-4C32		D4N-4D32		D4N-4E32		D4N-4F32
		M12 connector	---		---		D4N-9E32		---
Roller plunger	1-conduit	G1/2	D4N-6C32		D4N-6D32		D4N-6E32		D4N-6F32
		M20	D4N-8C32		D4N-8D32		D4N-8E32		D4N-8F32
		Pg13.5	D4N-1C62		D4N-1D62		D4N-1E62		D4N-1F62
		G1/2	D4N-2C62		D4N-2D62		D4N-2E62		D4N-2F62
	2-conduit	M20	D4N-4C62		D4N-4D62		D4N-4E62		D4N-4F62
		M12 connector	---		---		D4N-9E62		---
		G1/2	D4N-6C62		D4N-6D62		D4N-6E62		D4N-6F62
		M20	D4N-8C62		D4N-8D62		D4N-8E62		D4N-8F62
One-way roller arm lever (horizontal)	1-conduit	Pg13.5	D4N-1C62		D4N-1D62		D4N-1E62		D4N-1F62
		G1/2	D4N-2C62		D4N-2D62		D4N-2E62		D4N-2F62
		M20	D4N-4C62		D4N-4D62		D4N-4E62		D4N-4F62
		M12 connector	---		---		D4N-9E62		---
	2-conduit	G1/2	D4N-6C62		D4N-6D62		D4N-6E62		D4N-6F62
		M20	D4N-8C62		D4N-8D62		D4N-8E62		D4N-8F62
		Pg13.5	D4N-1C72		D4N-1D72		D4N-1E72		D4N-1F72
		G1/2	D4N-2C72		D4N-2D72		D4N-2E72		D4N-2F72
One-way roller arm lever (vertical)	1-conduit	M20	D4N-4C72		D4N-4D72		D4N-4E72		D4N-4F72
		M12 connector	---		---		D4N-9E72		---
		G1/2	D4N-6C72		D4N-6D72		D4N-6E72		D4N-6F72
		M20	D4N-8C72		D4N-8D72		D4N-8E72		D4N-8F72
	2-conduit	Pg13.5	D4N-1C72		D4N-1D72		D4N-1E72		D4N-1F72
		G1/2	D4N-2C72		D4N-2D72		D4N-2E72		D4N-2F72
		M20	D4N-4C72		D4N-4D72		D4N-4E72		D4N-4F72
		M12 connector	---		---		D4N-9E72		---

General-purpose Switches with Two Contacts

Actuator	Conduit size	Built-in switch mechanism							
		1NC/1NO (Snap-action)		2NC (Snap-action)		1NC/1NO (Slow-action)		2NC (Slow-action)	
		Model	Direct opening	Model	Direct opening	Model	Direct opening	Model	Direct opening
Fork lever lock (right operation)	1-conduit	G1/2	---	---	---	D4N-2ARE	---	D4N-2BRE	---
		M20				D4N-4ARE		D4N-4BRE	
Fork lever lock (left operation)		G1/2				D4N-2ALE		D4N-2BLE	
		M20				D4N-4ALE		D4N-4BLE	
Cat whisker		G1/2	D4N-2180	---	D4N-2280	---	---	D4N-2B80	
		M20	D4N-4180		D4N-4280			D4N-4B80	
Plastic rod		G1/2	D4N-2187		D4N-2287			D4N-2B87	
		M20	D4N-4187		D4N-4287			D4N-4B87	

Note: Mechanically speaking, these models are general-purpose switches with no direct opening mechanism.

General-purpose Switches with Three Contacts and MBB Contacts

Actuator	Conduit size	Built-in switch mechanism									
		2NC/1NO (Slow-action)		3NC (Slow-action)		1NC/1NO MBB (Slow-action)		2NC/1NO MBB (Slow-action)			
		Model	Direct opening	Model	Direct opening	Model	Direct opening	Model	Direct opening		
Fork lever lock (right operation)	1-conduit	G1/2	D4N-2CRE	---	D4N-2DRE	---	D4N-2ERE	---	D4N-2FRE	---	
		M20	D4N-4CRE		D4N-4DRE		D4N-4ERE		D4N-4FRE		
Fork lever lock (left operation)		G1/2	D4N-2CLE		D4N-2DLE		D4N-2ELE		D4N-2FLE		
		M20	D4N-4CLE		D4N-4DLE		D4N-4ELE		D4N-4FLE		
Cat whisker		G1/2	---	---	D4N-2D80	---	---	---	---		
		M20			D4N-4D80						
Plastic rod		G1/2			D4N-2D87						
		M20			D4N-4D87						

Note: Mechanically speaking, these models are general-purpose switches with no direct opening mechanism.

Specifications

Standards and EC Directives

Conforms to the following EC Directives:

- Machinery Directive
- Low Voltage Directive
- EN50047
- EN60204-1
- EN ISO 14119
- GS-ET-15

Certified Standards

Certification body	Standard	File No.
TÜV SÜD	EN60947-5-1 (certified direct opening)	*1
UL *2	UL508, CSA C22.2 No.14	E76675
CQC (CCC) *3	GB14048.5	2004010305105973

*1. Consult your OMRON representative for details.

*2. Certification for CSA C22.2 No. 14 is authorized by the UL mark.

*3. Ask your OMRON representative for information on certified models.

Certified Standard Ratings

TÜV (EN60947-5-1), CCC (GB14048.5)

Item	Utilization category	AC-15	DC-13
Rated operating current (I _e)	3 A	0.27 A	
Rated operating voltage (U _e)	240 V	250 V	

Note: Use a 10 A fuse type gI or gG that conforms to IEC60269 as a short-circuit protection device. This fuse is not built into the Switch.

UL/CSA (UL508, CSA C22.2 No. 14)

A300

Rated voltage	Carry current	Current (A)		Volt-amperes (VA)	
		Make	Break	Make	Break
120 VAC	10 A	60	6	7,200	720
		30	3		

Q300

Rated voltage	Carry current	Current (A)		Volt-amperes (VA)	
		Make	Break	Make	Break
125 VDC	2.5 A	0.55	0.55	69	69
		0.27	0.27		

Characteristics

Degree of protection *1		IP67 (EN60947-5-1)
Durability *2	Mechanical	15,000,000 operations min. *5
	Electrical	500,000 operations min. (3 A resistive load at 250 VAC) *3 300,000 operations min. (10 A resistive load at 250 VAC)
Operating speed		1 to 500 mm/s (D4N-1120)
Operating frequency		30 operations/minute max.
Contact resistance		25 mΩ max.
Minimum applicable load *4		1 mA resistive load at 5 VDC (N-level reference value)
Rated insulation voltage (Ui)		300 V
Rated frequency		50/60 Hz
Protection against electric shock		Class II (double insulation)
Pollution degree (operating environment)		3 (EN60947-5-1)
Impulse withstand voltage (EN60947-5-1)	Between terminals of same polarity	2.5 kV
	Between terminals of different polarity	4 kV
	Between each terminal and non-current carrying metallic parts	6 kV
Insulation resistance		100 MΩ min.
Contact gap		Snap-action: 2 × 0.5 mm min. Slow-action: 2 × 2 mm min.
Vibration resistance	Malfunction	10 to 55 Hz, 0.75 mm single amplitude
Shock resistance	Destruction	1,000 m/s ² min.
	Malfunction	300 m/s ² min.
Conditional short-circuit current		100 A (EN60947-5-1)
Conventional free air thermal current (I_{th})		10 A (EN60947-5-1)
Ambient operating temperature		−30 to 70°C (with no icing)
Ambient operating humidity		95% max.
Weight		Approx. 82 g (D4N-1120) Approx. 99 g (D4N-6120)

Note: 1. The above values are initial values.

2. Once a contact has been used to switch a standard load, it cannot be used for a load of a smaller capacity.

Doing so may result in roughening of the contact surface and contact reliability may be lost.

*1. The degree of protection is tested using the method specified by the standard (EN60947-5-1). Confirm that sealing properties are sufficient for the operating conditions and environment beforehand. Although the switch box is protected from dust or water penetration, do not use the D4N in places where foreign material such as dust, dirt, oil, water, or chemicals may penetrate through the head. Otherwise, accelerated wear, Switch damage or malfunctioning may occur.

*2. The durability is for an ambient temperature of 5 to 35°C and an ambient humidity of 40% to 70%. For more details, consult your OMRON representative.

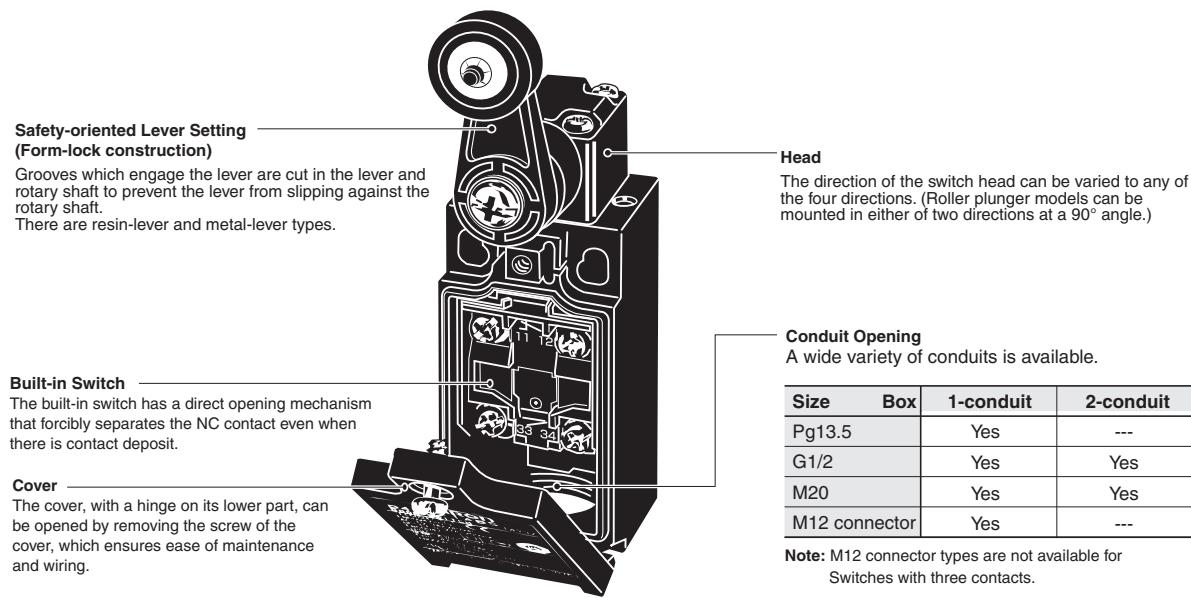
*3. Do not pass the 3 A, 250 VAC load through more than 2 circuits.

*4. This value will vary with the switching frequency, environment, and reliability level. Confirm that correct operation is possible with the actual load beforehand.

*5. The mechanical durability of fork lever lock models is 10,000,000 operations min.


Structure and Nomenclature

Structure



Direct Opening Mechanism

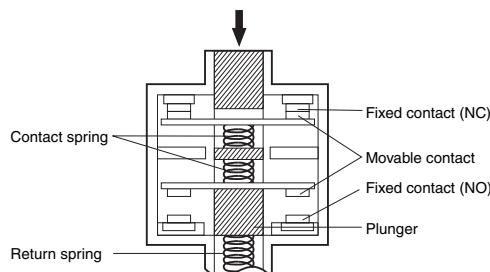1NC/1NO Contact (Slow-action)




Conforms to EN60947-5-1 Direct Opening Operation

(Only the NC contact side has a direct opening mechanism.)

When contact welding occurs, the contacts are separated from each other by the plunger being pushed in.

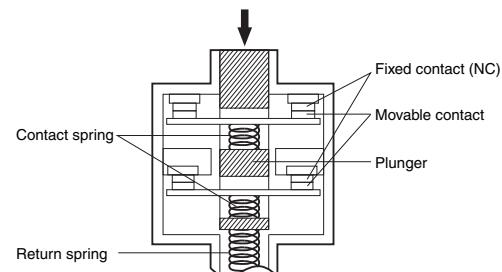2NC Contact (Slow-action)



















Conforms to EN60947-5-1 Direct Opening Operation

(Both NC contacts have a direct opening mechanism.)

When contact welding occurs, the contacts are separated from each other by the plunger being pushed in.

Contact Form

Model	Contact	Contact form	Operating pattern	Remarks
D4N-□1□	1NC/1NO (Snap-action)			Only NC contacts 31-32 have a certified direct opening mechanism.  The terminals 13-14 and 31-32 can be used as unlike poles.
D4N-□2□	2NC (Snap-action)			Only NC contacts 11-12 and 31-32 have a certified direct opening mechanism.  The terminals 11-12 and 31-32 can be used as unlike poles.
D4N-□A□	1NC/1NO (Slow-action)			Only NC contacts 11-12 have a certified direct opening mechanism.  The terminals 11-12 and 33-34 can be used as unlike poles.
D4N-□B□	2NC (Slow-action)			Only NC contacts 11-12 and 31-32 have a certified direct opening mechanism.  The terminals 11-12 and 31-32 can be used as unlike poles.
D4N-□C□	2NC/1NO (Slow-action)			Only NC contacts 11-12 and 21-22 have a certified direct opening mechanism.  The terminals 11-12, 21-22, and 33-34 can be used as unlike poles.
D4N-□D□	3NC (Slow-action)			Only NC contacts 11-12, 21-22, and 31-32 have a certified direct opening mechanism.  The terminals 11-12, 21-22, and 31-32 can be used as unlike poles.
D4N-□E□	1NC/1NO MBB * (Slow-action)			Only NC contacts 11-12 have a certified direct opening mechanism.  The terminals 11-12 and 33-34 can be used as unlike poles.
D4N-□F□	2NC/1NO MBB * (Slow-action)			Only NC contacts 11-12 and 21-22 have a certified direct opening mechanism.  The terminals 11-12, 21-22 and 33-34 can be used as unlike poles.

Note: The terminal numbers are according to EN 50013 and the contact symbols are according to EN 60947-5-1.

* MBB (Make Before Break) contacts have an overlapping structure, so that before the normally closed contact (NC) opens, the normally open contact (NO) closes.

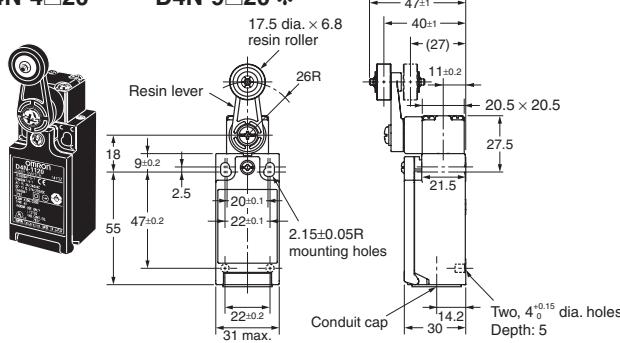
Dimensions and Operating Characteristics

(Unit: mm)


Switches

1-conduit Models


Roller Lever (Resin Lever, Resin Roller)

D4N-1□20 D4N-2□20
D4N-4□20 D4N-9□20 *

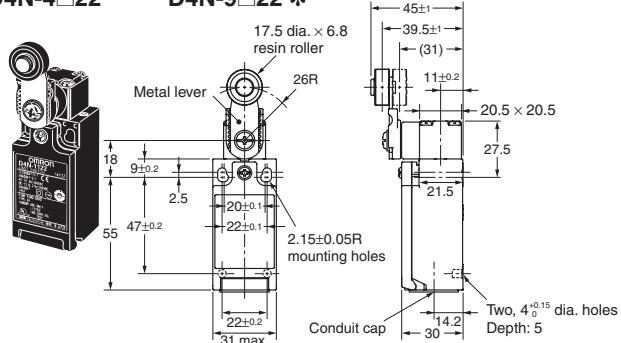
Roller Lever (Metal Lever, Resin Roller)

D4N-1□22 D4N-2□22
D4N-4□22 D4N-9□22 *

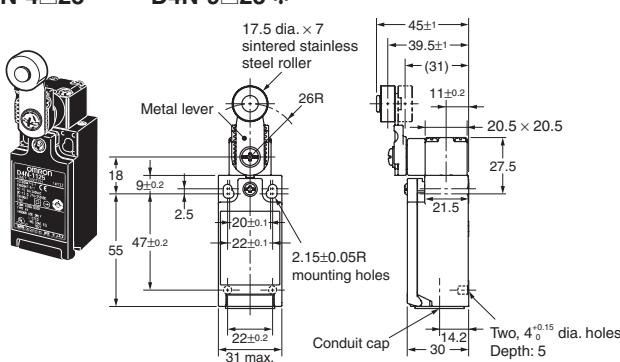Roller Lever (Metal Lever, Metal Roller)

D4N-1□25 D4N-2□25
D4N-4□25 D4N-9□25 *

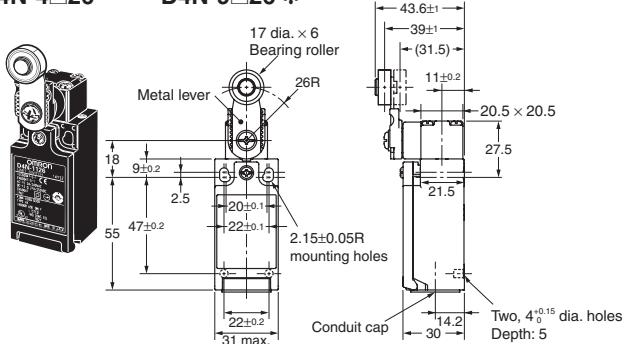Roller Lever (Metal Lever, Bearing Roller)

D4N-1□26 D4N-2□26
D4N-4□26 D4N-9□26 *

Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

* Refer to page 12 for details on M12 connectors.

Snap-action (1NC/1NO) (2NC), Slow-action (2NC) (3NC)

Model	D4N-□120	D4N-□122	D4N-□125	D4N-□126
Operating characteristics	D4N-□220	D4N-□222	D4N-□225	D4N-□226
Operating force	D4N-□B20	D4N-□B22	D4N-□B25	D4N-□B26
Release force	D4N-□D20	D4N-□D22	D4N-□D25	D4N-□D26
Pretravel	OF max.	5.0 N		
Overtravel	RF min.	0.5 N		
Movement differential MD max. *1	PT	18° to 27°		
Operating position	OT min.	40°		
Total travel	OT min.	14°		
Direct opening travel	DOT min. *3			
Direct opening force	DOF min. *3	20 N		

Note: Variation occurs in the simultaneity of contact opening/closing operations of 2NC, 2NC/1NO, and 3NC contacts. Check contact operation.

*1. Only for snap-action models.

*2. Reference value.

*3. For safe use, always make sure that the minimum values or greater are provided.

Slow-action (1NC/1NO) (2NC/1NO)

Model	D4N-□A20	D4N-□A22	D4N-□A25	D4N-□A26
Operating characteristics				
Operating force	OF max.	5.0 N		
Release force	RF min.	0.5 N		
Pretravel	PT (NC)	18° to 27°		
Overtravel	PT (NO) *1	(44°)		
Operating position	PT (NC) *2	27.5° to 36.5°		
Total travel	PT (NO) *1, *2	(18°)		
Direct opening travel	OT min.	40°		
Direct opening force	OP	---		
Pretravel	TT *1	(80°)		
Overtravel	DOT min. *3	50°		
Operating position	DOF min. *3	20 N		

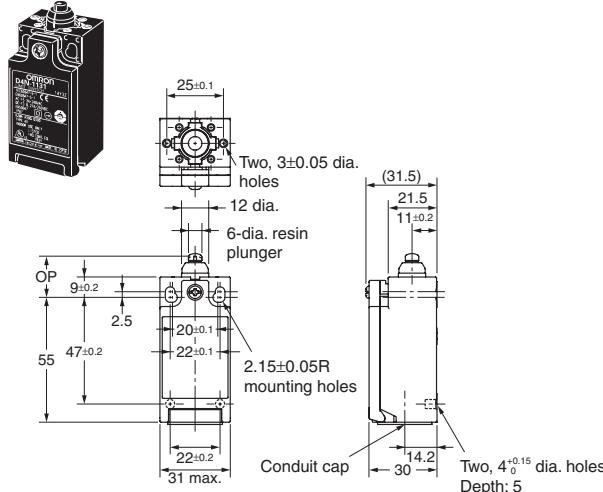
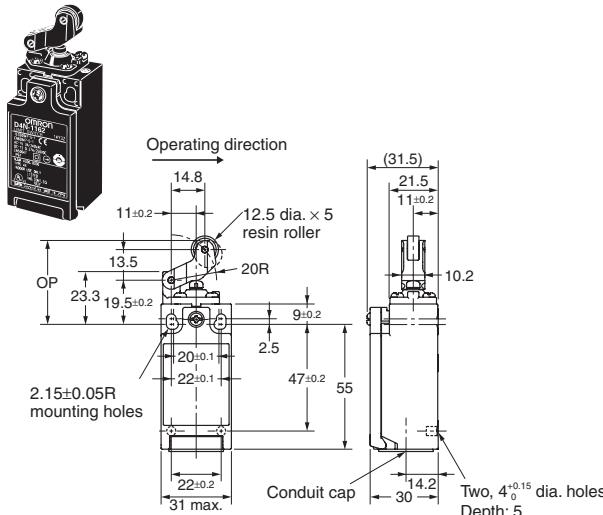
*1. Reference values.

*2. Only for MBB models. (D4N-□E□□ or D4N-□F□□)



*3. For safe use, always make sure that the minimum values or greater are provided.

1-conduit Models

Plunger

D4N-1□31
D4N-4□31D4N-2□31
D4N-9□31 *One-way Roller Arm Lever
(Horizontal)D4N-1□62
D4N-4□62D4N-2□62
D4N-9□62 *

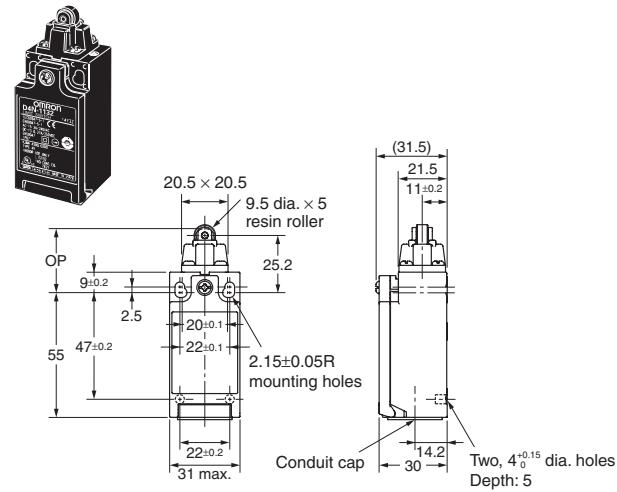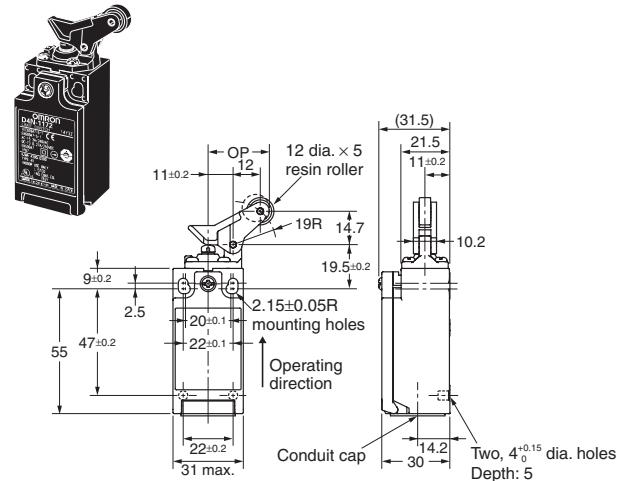Roller Plunger

D4N-1□32
D4N-4□32D4N-2□32
D4N-9□32 *One-way Roller Arm Lever
(Vertical)D4N-1□72
D4N-4□72D4N-2□72
D4N-9□72 *

Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

* Refer to page 12 for details on M12 connectors.

Snap-action (1NC/1NO) (2NC), Slow-action (2NC) (3NC)

Model		D4N-□131	D4N-□132	D4N-□162	D4N-□172
Operating characteristics		D4N-□231	D4N-□232	D4N-□262	D4N-□272
Operating force	OF max.	6.5 N	6.5 N	5.0 N	5.0 N
Release force	RF min.	1.5 N	1.5 N	0.8 N	0.8 N
Pretravel	PT max.	2 mm	2 mm	4 mm	4 mm
Overtravel	OT min.	4 mm	4 mm	5 mm	5 mm
Movement differential	MD max. *1	1 mm	1 mm	1.5 mm	1.5 mm
Operating position	OP	18.2 ±0.5 mm	28.6 ±0.8 mm	37 ±0.8 mm	27 ±0.8 mm
Total travel	TT *2	(6 mm)	(6 mm)	(9 mm)	(9 mm)
Direct opening travel	DOT min. *3	3.2 mm	3.2 mm	5.8 mm	4.8 mm
Direct opening force	DOF min. *3	20 N	20 N	20 N	20 N

Note: Variation occurs in the simultaneity of contact opening/closing operations of 2NC, 2NC/1NO, and 3NC contacts. Check contact operation.

*1. Only for snap-action models.

*2. Reference value.

*3. For safe use, always make sure that the minimum values or greater are provided.

Slow-action (1NC/1NO) (2NC/1NO)



Model		D4N-□A31	D4N-□A32	D4N-□A62	D4N-□A72
Operating characteristics		D4N-□C31	D4N-□C32	D4N-□C62	D4N-□C72
Operating force	OF max.	6.5 N	6.5 N	5.0 N	5.0 N
Release force	RF min.	1.5 N	1.5 N	0.8 N	0.8 N
Pretravel	PT max. (NC)	2 mm	2 mm	4 mm	4 mm
	PT (NO) *1	(2.9 mm)	(2.9 mm)	(5.2 mm)	(4.3 mm)
	PT max. (NC) *2	2.8 mm	2.8 mm	4 mm	4 mm
	PT (NO) *1, *2	(1 mm)	(1 mm)	(1.5 mm)	(1.5 mm)
Overtravel	OT min.	4 mm	4 mm	5 mm	5 mm
Operating position	OP	18.2 ±0.5 mm	28.6 ±0.8 mm	37 ±0.8 mm	27 ±0.8 mm
	OP *2	17.4 ±0.5 mm	28 ±0.8 mm	36 ±0.8 mm	26.1 ±0.8 mm
Total travel	TT *1	(6 mm)	(6 mm)	(9 mm)	(9 mm)
Direct opening travel	DOT min. *3	3.2 mm	3.2 mm	5.8 mm	4.8 mm
Direct opening force	DOF min. *3	20 N	20 N	20 N	20 N

*1. Reference values.

*2. Only for MBB models. (D4N-□E□□ or D4N-□F□□)

*3. For safe use, always make sure that the minimum values or greater are provided.

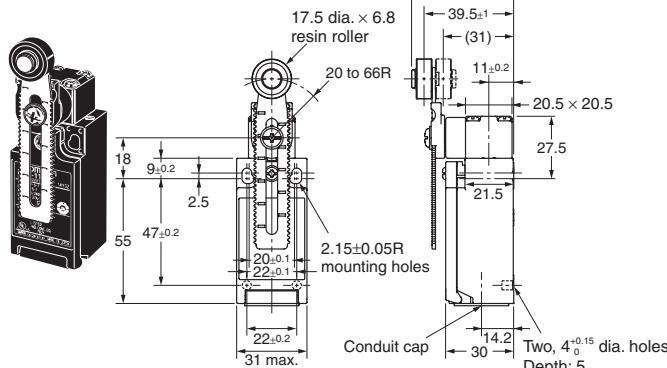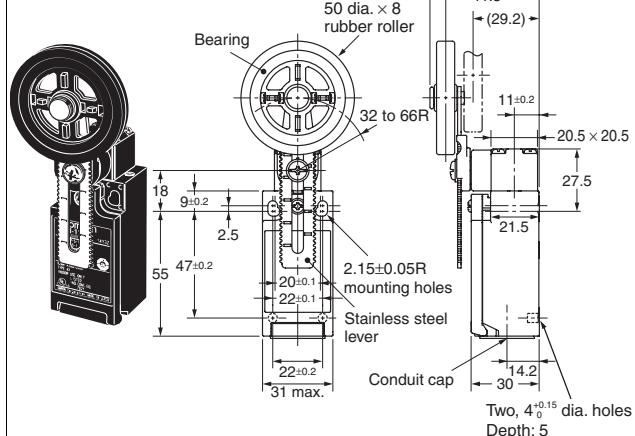1-conduit Models

Adjustable Roller Lever, Form Lock
(with Metal Lever, Resin Roller)D4N-1□2G D4N-2□2G
D4N-4□2G D4N-9□2G *Adjustable Roller Lever, Form Lock
(with Metal Lever, Rubber Roller)D4N-1□2H D4N-2□2H
D4N-4□2H

Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

* Refer to following diagrams for details on M12 connectors.

Snap-action (1NC/1NO) (2NC), Slow-action (2NC) (3NC)

Model	D4N-□12H	D4N-□12G
D4N-□22H		D4N-□22G
D4N-□B2H		D4N-□B2G
D4N-□D2H		D4N-□D2G
		*1
Operating characteristics		
Operating force	OF max.	4.5 N
Release force	RF min.	0.4 N
Pretravel	PT	18° to 27°
Overtravel	OT min.	40°
Movement differential	MD max. *2	14°
Operating position	OP	---
Total travel	TT *3	(80°)
Direct opening travel	DOT min. *4	50°
Direct opening force	DOF min. *4	20 N

Note: Variation occurs in the simultaneity of contact opening/closing operations of 2NC, 2NC/1NO, and 3NC contacts. Check contact operation.

*1. The operating characteristics of these Switches were measured with the roller lever set at 32 mm.

*2. Only for snap-action models.

*3. Reference value.

*4. For safe use, always make sure that the minimum values or greater are provided.

Slow-action (1NC/1NO) (2NC/1NO)

Model	D4N-□A2H	D4N-□A2G
D4N-□C2H		D4N-□C2G
D4N-□E2H		D4N-□E2G
D4N-□F2H		D4N-□F2G
		*1
Operating characteristics		
Operating force	OF max.	4.5 N
Release force	RF min.	0.4 N
Pretravel	PT (NC)	18° to 27°
	PT (NO) *2	(44°)
	PT (NC) *3	27.5° to 36.5°
	PT (NO) *2, *3	(18°)
Overtravel	OT min.	40°
Operating position	OP	---
Total travel	TT *2	(80°)
Direct opening travel	DOT min.	50°
Direct opening force	DOF min. *4	20 N

*1. The operating characteristics of these Switches were measured with the roller lever set at 32 mm.


*2. Reference values.

*3. Only for MBB models. (D4N-□E□□ or D4N-□F□□)

*4. For safe use, always make sure that the minimum values or greater are provided.


1-conduit M12 Connector

D4N-9□□□




1-conduit Models

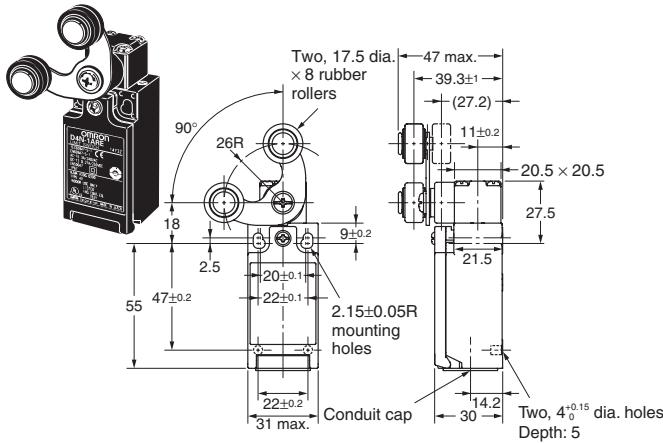
Fork Lever Lock
(Right Operation) *2
D4N-2□RE
D4N-4□RE




Cat Whisker *2
D4N-2□80
D4N-4□80

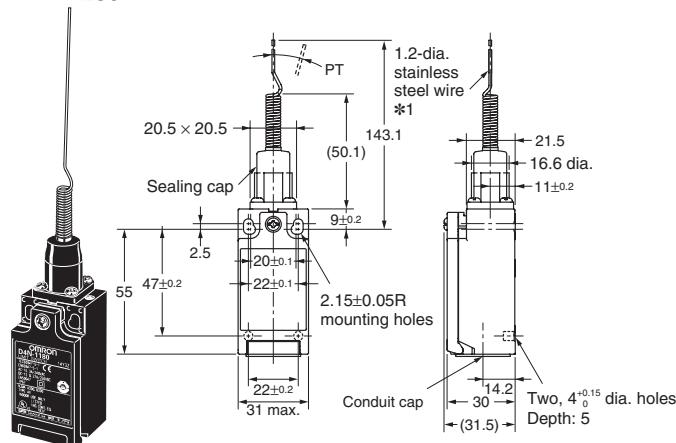

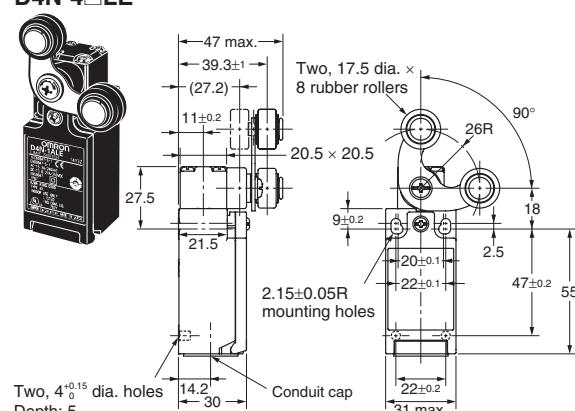Fork Lever Lock
(Left Operation) *2
D4N-2□LE
D4N-4□LE



Plastic Rod *2
D4N-2□87
D4N-4□87

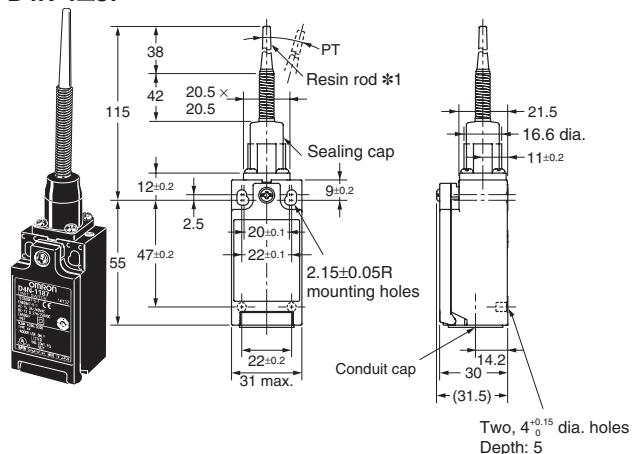

Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

***1.** The usable range for stainless steel wires and resin rods is 35 mm max. from the end with a total travel of 70 mm max.

***2.** In terms of construction, the Switch is a General-purpose Limit Switch rather than a Safety Limit Switch.

Slow-action (1NC/1NO) (2NC/1NO) (2NC) (3NC)

Model Operating characteristics	D4N-□□RE	D4N-□□LE
Force necessary to reverse the direction of the lever: max.	6.4 N	6.4 N
Movement until the lever reverses	55 ± 10°	55 ± 10°
Movement until switch operation (NC)	(6.5°) (MBB: 10°)	(6.5°) (MBB: 10°)
Movement until switch operation (NO)	(18.5°) (MBB: 5°)	(18.5°) (MBB: 5°)


Note: Variation occurs in the simultaneity of contact opening/closing operations of 2NC, 2NC/1NO, and 3NC contacts. Check contact operation.

Snap-action (1NC/1NO) (2NC), Slow-action (2NC) (3NC)


Model Operating characteristics	D4N-□□80	D4N-□□87
Operating force OF max.	1.5 N	1.5 N
Pretravel PT max.	15°	15°

2-conduit Models

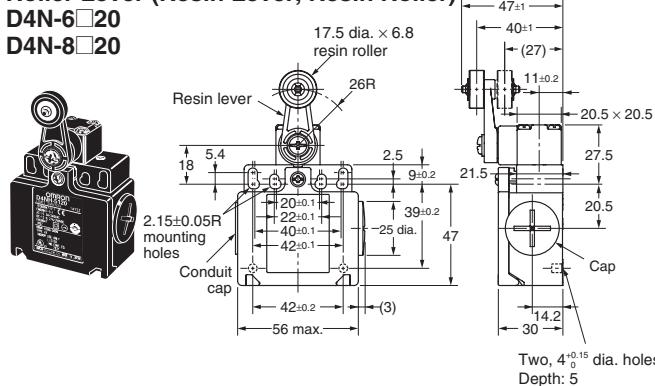
Roller Lever (Resin Lever, Resin Roller)

D4N-6□20
D4N-8□20

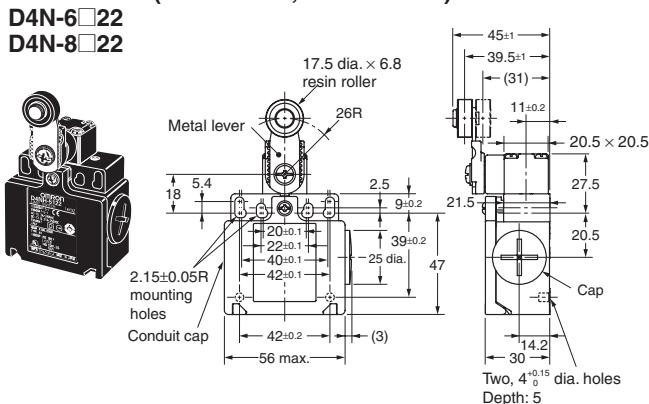
Roller Lever (Metal Lever, Resin Roller)

D4N-6□22
D4N-8□22

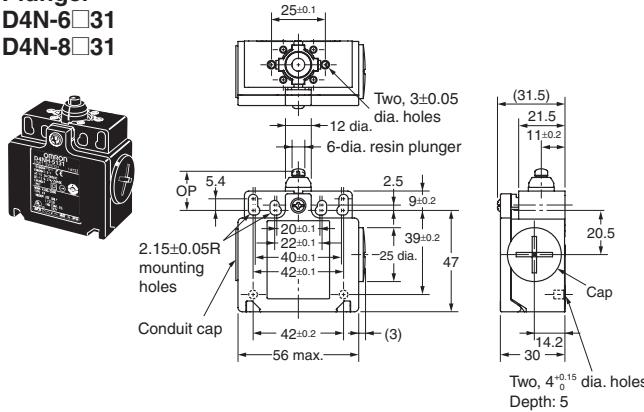Plunger

D4N-6□31
D4N-8□31

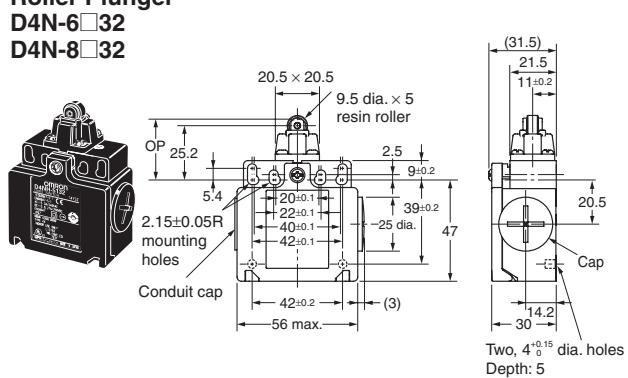Roller Plunger

D4N-6□32
D4N-8□32

Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Snap-action (1NC/1NO) (2NC), Slow-action (2NC) (3NC)

	Model	D4N-□120	D4N-□122	D4N-□131	D4N-□132
Operating characteristics	D4N-□220	D4N-□222	D4N-□231	D4N-□232	
Operating force	OF max.	5 N	5 N	6.5 N	6.5 N
Release force	RF min.	0.5 N	0.5 N	1.5 N	1.5 N
Pretravel	PT	18° to 27°	18° to 27°	2 mm	2 mm
Overtravel	OT min.	40°	40°	4 mm	4 mm
Movement differential	MD max. *1	14°	14°	1 mm	1 mm
Operating position OP	---	---	18 ±0.5 mm	28.2 ±0.8 mm	
Total travel	TT *2	(80°)	(80°)	(6 mm)	(6 mm)
Direct opening travel	DOT min. *3	50°	50°	3.2 mm	3.2 mm
Direct opening force	DOF min. *3	20 N	20 N	20 N	20 N

Note: Variation occurs in the simultaneity of contact opening/closing operations of 2NC, 2NC/1NO, and 3NC contacts. Check contact operation.

*1. Only for snap-action models.

*2. Reference value.

*3. For safe use, always make sure that the minimum values or greater are provided.

Slow-action (1NC/1NO) (2NC/1NO)

	Model	D4N-□A20	D4N-□A22	D4N-□A31	D4N-□A32
Operating characteristics	D4N-□C20	D4N-□C22	D4N-□E20	D4N-□E22	D4N-□E31
Operating force	OF max.	5 N	5 N	6.5 N	6.5 N
Release force	RF min.	0.5 N	0.5 N	1.5 N	1.5 N
Pretravel	PT (NC)	18° to 27°	18° to 27°	2 mm	2 mm
	PT (NO) *1	(44°)	(44°)	(2.9 mm)	(2.9 mm)
	PT (NC) *2	27.5° to 36.5°	27.5° to 36.5°	2.8 mm	2.8 mm
	PT (NO) *1, *2	(18°)	(18°)	(1 mm)	(1 mm)
Overtravel	OT min.	40°	40°	4 mm	4 mm
Operating position OP	---	---	18 ±0.5 mm	28.2 ±0.8 mm	
	OP *2	---	---	17.4 ±0.5 mm	28 ±0.8 mm
Total travel	TT *1	(80°)	(80°)	(6 mm)	(6 mm)
Direct opening travel	DOT min. *3	50°	50°	3.2 mm	3.2 mm
Direct opening force	DOF min. *3	20 N	20 N	20 N	20 N

*1. Reference values.

*2. Only for MBB models. (D4N-□E□□ or D4N-□F□□)

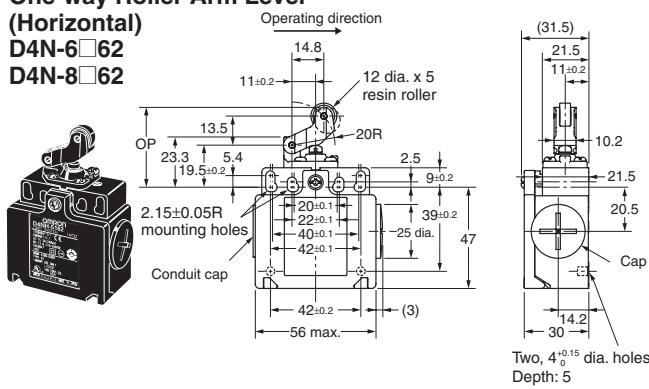
*3. For safe use, always make sure that the minimum values or greater are provided.

2-conduit Models

One-way Roller Arm Lever (Horizontal)

D4N-6□62


D4N-8□62



One-way Roller Arm Lever (Vertical)

D4N-6□72

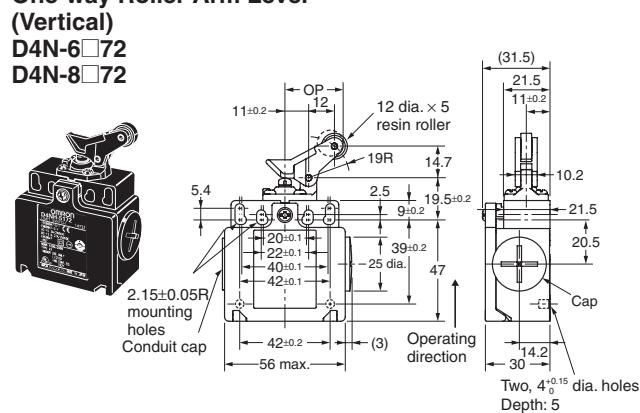
D4N-8□72



Adjustable Roller Lever, Form Lock (with Metal Lever, Resin Roller)

D4N-6□2G

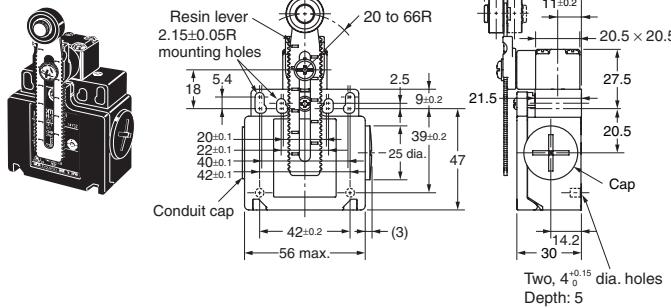
D4N-8□2G



Adjustable Roller Lever, Form Lock (with Metal Lever, Rubber Roller)

D4N-6□2H

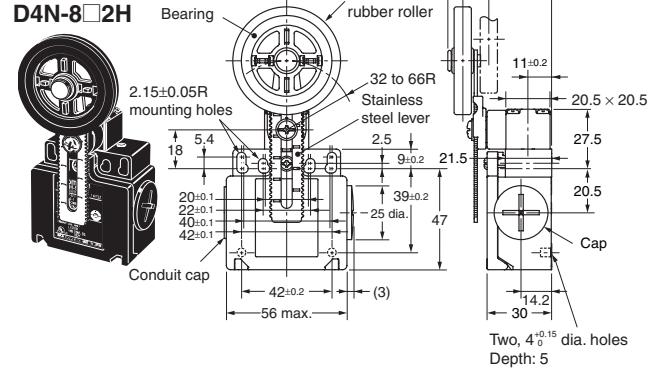D4N-8□2H



Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Snap-action (1NC/1NO) (2NC), Slow-action (2NC) (3NC)

Model	D4N-□162	D4N-□172	D4N-□12G	D4N-□12H	D4N-□262	D4N-□272	D4N-□22G	D4N-□22H	D4N-□B62	D4N-□B72	D4N-□B2G	D4N-□B2H	D4N-□D62	D4N-□D72	D4N-□D2G	D4N-□D2H
Operating characteristics																
Operating force	OF max.	5.0 N	5.0 N	4.5 N	4.5 N											
Release force	RF min.	0.8 N	0.8 N	0.4 N	0.4 N											
Pretravel	PT max.	4 mm	4 mm	18° to 27°	18° to 27°											
Overtravel	OT min.	5 mm	5 mm	40°	40°											
Movement differential																
MD max. *3		1.5 mm	1.5 mm	14°	14°											
Operating position OP		37 ±0.8 mm	27 ±0.8 mm	---	---											
Total travel TT *4		(9 mm)	(9 mm)	(70°)	(70°)											
Direct opening travel																
DOT min. *5																
Direct opening force																
DOF min. *5		20 N	20 N	20 N	20 N											

Note: Variation occurs in the simultaneity of contact opening/closing operations of 2NC, 2NC/1NO, and 3NC contacts. Check contact operation.

*1. The operating characteristics of these Switches were measured with the roller lever set at 30 mm.

*2. The operating characteristics of these Switches were measured with the roller lever set at 31 mm.

*3. Only for snap-action models.

*4. Reference value.

*5. For safe use, always make sure that the minimum values or greater are provided.

Slow-action (1NC/1NO) (2NC/1NO)

Model	D4N-□A62	D4N-□A72	D4N-□A2G	D4N-□A2H	D4N-□C62	D4N-□C72	D4N-□E62	D4N-□E72	D4N-□F62	D4N-□F72	D4N-□E2G	D4N-□F2G	*1	D4N-□C2H	D4N-□E2H	D4N-□F2H	*2
Operating characteristics																	
Operating force	OF max.	5.0 N	5.0 N	4.5 N	4.5 N												
Release force	RF min.	0.8 N	0.8 N	0.4 N	0.4 N												
Pretravel	PT max. (NC)	4 mm	4 mm	18° to 27°	18° to 27°												
	PT (NO) *3	(5.2 mm)	(4.3 mm)	(44°)	(44°)												
	PT max. (NC) *4	4 mm	4 mm	27.5° to 36.5°	27.5° to 36.5°												
	PT (NO) *3, 4	(1.5 mm)	(1.5 mm)	(18°)	(18°)												
Overtravel	OT min.	5 mm	5 mm	40°	40°												
Operating position OP		37 ±0.8 mm	27 ±0.8 mm	---	---												
OP *4		36 ±0.8 mm	26.1 ±0.8 mm	---	---												
Total travel TT *3		(9 mm)	(9 mm)	(70°)	(70°)												
Direct opening travel																	
DOT min. *5																	
Direct opening force																	
DOF min. *5		20 N	20 N	20 N	20 N												

*1. The operating characteristics of these Switches were measured with the roller lever set at 30 mm.

*2. The operating characteristics of these Switches were measured with the roller lever set at 31 mm.


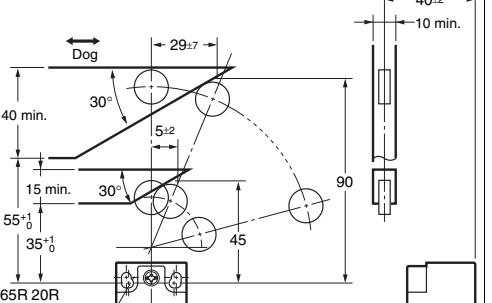
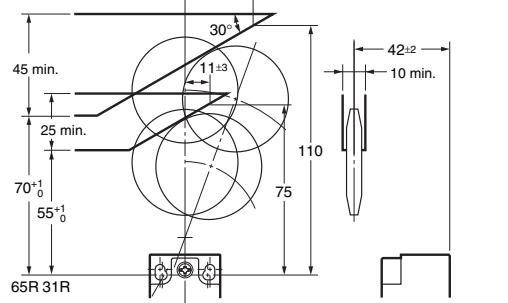

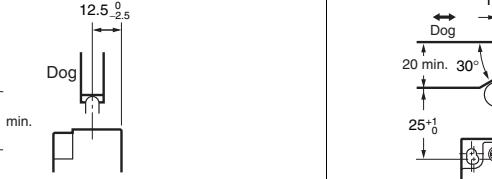

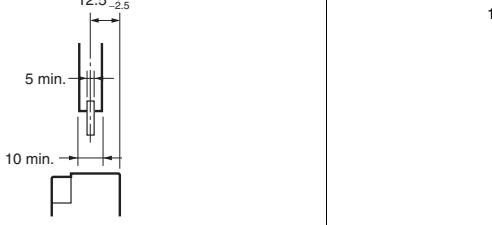

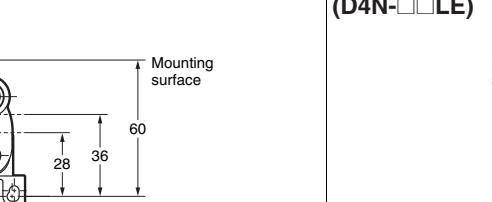
*3. Reference values.

*4. Only for MBB models. (D4N-□E□□ or D4N-□F□□)

*5. For safe use, always make sure that the minimum values or greater are provided.

Levers

Refer to the following for the angles and positions of the watchdogs (source: EN50047.)

Roller Lever (D4N-□□20) 	Adjustable Roller Lever, Form Lock (with Metal Lever, Resin Roller) (D4N-□□2G) (Reference Values) 	Adjustable Roller Lever, Form Lock (with Metal Lever, Rubber Roller) (D4N-□□2H) (Reference Values) 
Sealed Plunger (D4N-□□31) 	Roller Plunger (D4N-□□32) 	
One-way Roller Arm Lever (Horizontal) (D4N-□□62) 	One-way Roller Arm Lever (Vertical) (Reference Values) (D4N-□□72) 	
Fork Lever Lock (Right Operation) (D4N-□□RE) 	Fork Lever Lock (Left Operation) (D4N-□□LE) 	

Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Safety Precautions

Be sure to read the precautions for All Safety Limit Switches in the website at: <http://www.ia.omron.com/>.

Indication and Meaning for Safe Use

CAUTION	Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury or in property damage.
Precautions for Safe Use	Supplementary comments on what to do or avoid doing, to use the product safely.
Precautions for Correct Use	Supplementary comments on what to do or avoid doing, to prevent failure to operate, or undesirable effect on product performance.

CAUTION

Electric shock may occasionally occur.
Do not use metal connectors or metal conduits.



Precautions for Safe Use

- Do not use the Switch submerged in oil or water, or in locations continuously subject to splashes of oil or water. Doing so may result in oil or water entering the Switch interior. (The IP67 degree of protection specification for the Switch refers to water penetration while the Switch is submersed in water for a specified period of time.)
- Always attach the cover after completing wiring and before using the Switch. Also, do not turn ON the Switch with the cover open. Doing so may result in electric shock.
- Do not switch circuits for two or more standard loads (250 VAC, 3 A). Doing so may adversely affect insulation performance.

Precautions for Correct Use


The Switch contacts can be used with either standard loads or microloads. Once the contacts have been used to switch a load, however, they cannot be used to switch smaller loads. The contact surfaces will become rough once they have been used and contact reliability for smaller loads may be reduced.

Mounting Method

Appropriate Tightening Torque

Tighten each of the screws to the specified torque. Loose screws may result in malfunction of the Switch within a short time.

1	Terminal screw	0.6 to 0.8 N·m
2	Cover mounting screw	0.5 to 0.7 N·m
3	Head mounting screw	0.5 to 0.6 N·m
4	Lever mounting screw	1.6 to 1.8 N·m
5	Body mounting screw	0.5 to 0.7 N·m
6	Connector, M12 adaptor	1.8 to 2.2 N·m
7	Cap screw	1.3 to 1.7 N·m

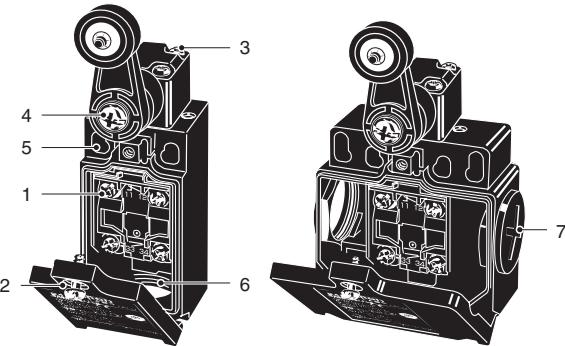


Switch Mounting


- Mount the Switch using M4 screws and spring washers and tighten the screws to the specified torque.
- For safety, use screws that cannot be easily removed, or use an equivalent measure to ensure that the Switch is secure.
- As shown below, two studs with a maximum height of 4.8 mm and a diameter of $4_{-0.15}^{+0.05}$ mm can be provided, the studs inserted into the holes on the bottom of the Switch, and the Switch secured at four locations to increase the mounting strength.

Switch Mounting Holes


One-conduit Type




Two-conduit Type



- Make sure that the dog contacts the actuator at a right angle. Applying a load to the switch actuator (roller) on a slant may result in deformation or damage of the actuator or rotary shaft.



Incorrect



Correct

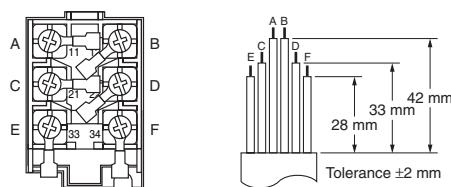
Wiring

Wiring


- When connecting to the terminals via insulating tube and M3.5 crimp terminals, arrange the crimp terminals as shown below so that they do not rise up onto the case or the cover.

Applicable lead wire size: AWG20 to AWG18 (0.5 to 0.75 mm²). Use lead wires of an appropriate length, as shown below. Not doing so may result in excess length causing the cover to rise and not fit properly.

One-conduit Type (3 Poles)




Two-conduit Type (3 Poles)

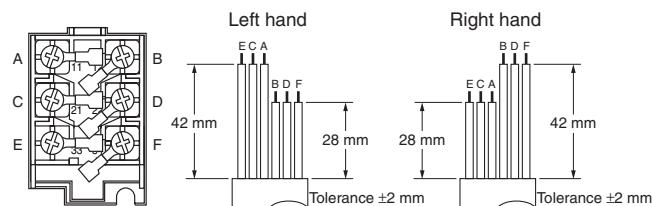

- Do not push crimp terminals into gaps in the case interior. Doing so may cause damage or deformation of the case.
- Use crimp terminals not more than 0.5 mm in thickness. Otherwise, they will interfere with other components inside the case.

[Reference] The crimp terminals shown below are not more than 0.5 mm thick.

Manufacturer	Type
J.S.T. Mfg. Co.	FN0.5-3.7 (F Type)
	N0.5-3.7 (Straight Type)

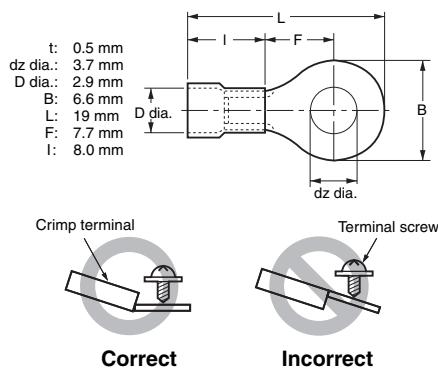


Contact Arrangement

- The contact arrangements are shown below.


Screw Terminal Type

D4N-□D□□ (3NC)



D4N-□C□□ (2NC/1NO)

D4N-□F□□ (2NC/1NO (MBB))



D4N-□B□□ (2NC)

D4N-□2□□ (2NC (SNAP))




D4N-□A□□ (1NC/1NO)

D4N-□E□□ (1NC/1NO (MBB))




D4N-□1□□ (1NC/1NO (SNAP))



Connector Type

D4N-9B□□ (2NC)

D4N-92□□ (2NC (SNAP))




D4N-9A□□ (1NC/1NO)

D4N-9E□□ (1NC/1NO (MBB))



D4N-91□□ (1NC/1NO (SNAP))



Pin No. (Terminal No.)

- Applicable socket: XS2F-D421 series (OMRON).
- Refer to the *Connector Catalog* for details on socket pin numbers and lead wire colors.

Socket Tightening (Connector Type)

- Turn the socket connector screws by hand and tighten until no space remains between the socket and the plug.
- Make sure that the socket connector is tightened securely. Otherwise, the rated degree of protection (IP67) may not be maintained and vibration may loosen the socket connector.

Conduit Opening

- Connect a recommended connector to the opening of the conduit and tighten the connector to the specified torque. The case may be damaged if an excessive tightening torque is applied.
- Use a cable with a suitable diameter for the connector.
- Attach and tighten a conduit cap to the unused conduit opening when wiring. Tighten the conduit cap to the specified torque. The conduit cap is provided with the Switch (2-conduit types).

Changing the Lever

The lever mounting screws can be used to set the lever position to any position in a 360° angle at 7.5° increments. Grooves are incised on the lever and rotary shaft that engage to prevent the lever from slipping against the rotary shaft. The screws on adjustable roller lever models can also be loosened to change the length of the lever. Remove the screws from the front of the lever before mounting the lever in reverse (front/back), and set the level so that operation will be completed before exceeding a range of 180° on the horizontal.

Recommended Connectors

Use connectors with screws not exceeding 9 mm, otherwise the screws will protrude into the case interior, interfering with other components in the case.

The connectors listed in the following table have connectors with thread sections not exceeding 9 mm.

Use the recommended connectors to ensure conformance to IP67.

Size	Manufacturer	Model	Applicable cable diameter
G1/2	LAPP	ST-PF1/2 5380-1002	6.0 to 12.0 mm
Pg13.5	LAPP	ST-13.5 5301-5030	6.0 to 12.0 mm
M20	LAPP	ST-M20 × 1.5 5311-1020	7.0 to 13.0 mm

Use LAPP connectors together with seal packing (JPK-16, GP-13.5, or GPM20), and tighten to the specified tightening torque. Seal packing is sold separately.

- LAPP is a German manufacturer.

Others

- When attaching a cover, be sure that the seal rubber is in place and that there is no foreign material present. If the cover is attached with the seal rubber out of place or if foreign material is stuck to the rubber, a proper seal will not be obtained.
- Do not use any screws to connect the cover other than the specified ones. The seal characteristics may be reduced.
- Make sure that foreign particles do not enter the head when removing the screws from the four corners to change the head position in any of the four directions.
- Use the following recommended countermeasures to prevent telegraphing when using adjustable or long levers.
 1. Make the rear edge of the dog smooth with an angle of 15° to 30° or make it in the shape of a quadratic curve.
 2. Design the circuit so that no error signal will be generated.

Terms and Conditions of Sale

1. **Offer: Acceptance.** These terms and conditions (these "Terms") are deemed part of all quotes, agreements, purchase orders, acknowledgments, price lists, catalogs, manuals, brochures and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "Products") by Omron Electronics LLC and its subsidiary companies ("Omron"). Omron objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
2. **Prices; Payment Terms.** All prices stated are current, subject to change without notice by Omron. Omron reserves the right to increase or decrease prices on any unshipped portions of outstanding orders. Payments for Products are due net 30 days unless otherwise stated in the invoice.
3. **Discounts.** Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Omron's payment terms and (ii) Buyer has no past due amounts.
4. **Interest.** Omron, at its option, may charge Buyer 1-1/2% interest per month or the maximum legal rate, whichever is less, on any balance not paid within the stated terms.
5. **Orders.** Omron will accept no order less than \$200 net billing.
6. **Governmental Approvals.** Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Products.
7. **Taxes.** All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Omron or required to be collected directly or indirectly by Omron for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Omron.
8. **Financial.** If the financial position of Buyer at any time becomes unsatisfactory to Omron, Omron reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Omron may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
9. **Cancellation; Etc.** Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Omron against all related costs or expenses.
10. **Force Majeure.** Omron shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
11. **Shipping; Delivery.** Unless otherwise expressly agreed in writing by Omron:
 - a. Shipments shall be by a carrier selected by Omron; Omron will not drop ship except in "break down" situations.
 - b. Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
 - c. All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Omron), at which point title and risk of loss shall pass from Omron to Buyer; provided that Omron shall retain a security interest in the Products until the full purchase price is paid;
 - d. Delivery and shipping dates are estimates only; and
 - e. Omron will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
12. **Claims.** Any claim by Buyer against Omron for shortage or damage to the Products occurring before delivery to the carrier must be presented in writing to Omron within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Products from Omron in the condition claimed.
13. **Warranties.** (a) **Exclusive Warranty.** Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied. (b) **Limitations.** OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) **Buyer Remedy.** Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty. See <http://www.omron247.com> or contact your Omron representative for published information.
14. **Limitation on Liability; Etc.** OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.
15. **Indemnities.** Buyer shall indemnify and hold harmless Omron Companies and their employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Omron is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Omron and defend or settle any action brought against such Companies to the extent based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
16. **Property; Confidentiality.** Any intellectual property in the Products is the exclusive property of Omron Companies and Buyer shall not attempt to duplicate it in any way without the written permission of Omron. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Omron. All information and materials supplied by Omron to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
17. **Export Controls.** Buyer shall comply with all applicable laws, regulations and licenses regarding (i) export of products or information; (ii) sale of products to "forbidden" or other proscribed persons; and (ii) disclosure to non-citizens of regulated technology or information.
18. **Miscellaneous.** (a) **Waiver.** No failure or delay by Omron in exercising any right and no course of dealing between Buyer and Omron shall operate as a waiver of rights by Omron. (b) **Assignment.** Buyer may not assign its rights hereunder without Omron's written consent. (c) **Law.** These Terms are governed by the law of the jurisdiction of the home office of the Omron company from which Buyer is purchasing the Products (without regard to conflict of law principles). (d) **Amendment.** These Terms constitute the entire agreement between Buyer and Omron relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) **Severability.** If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) **Setoff.** Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (g) **Definitions.** As used herein, "including" means "including without limitation"; and "Omron Companies" (or similar words) mean Omron Corporation and any direct or indirect subsidiary or affiliate thereof.

Certain Precautions on Specifications and Use

1. **Suitability of Use.** Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given:
 - (i) Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
 - (ii) Use in consumer products or any use in significant quantities.
 - (iii) Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
 - (iv) Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this Product.
- NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON'S PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
2. **Programmable Products.** Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.
3. **Performance Data.** Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.
4. **Change in Specifications.** Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.
5. **Errors and Omissions.** Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

OMRON AUTOMATION AND SAFETY • THE AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE

México DF • 52.55.59.01.43.00 • 01-800-226-6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE

Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE

Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

OMRON EUROPE B.V. • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • +31 (0) 23 568 13 00 • www.industrial.omron.eu

Authorized Distributor:

Automation Control Systems

- Machine Automation Controllers (MAC) • Programmable Controllers (PLC)
- Operator interfaces (HMI) • Distributed I/O • Software

Drives & Motion Controls

- Servo & AC Drives • Motion Controllers & Encoders

Temperature & Process Controllers

- Single and Multi-loop Controllers

Sensors & Vision

- Proximity Sensors • Photoelectric Sensors • Fiber-Optic Sensors
- Amplified Photomicrosensors • Measurement Sensors
- Ultrasonic Sensors • Vision Sensors

Industrial Components

- RFID/Code Readers • Relays • Pushbuttons & Indicators
- Limit and Basic Switches • Timers • Counters • Metering Devices
- Power Supplies

Safety

- Laser Scanners • Safety Mats • Edges and Bumpers • Programmable Safety Controllers • Light Curtains • Safety Relays • Safety Interlock Switches