

HIGH SURGE RESISTORS, 1/8W to 12W

PR SERIES



Term. W is
RoHS
compliant
& 260°C
compatible



RESISTORS • CAPACITORS • COILS • DELAY LINES


- ❑ Cost effective high-voltage surge resistors to 200 joules
- ❑ Available on RCD's exclusive **SWIFT™** program
- ❑ Molded surface mount version available (PRM series)

OPTIONS

- ❑ Opt. ER: Group A Screening per MIL-R-39008 RCR
- ❑ Opt. S: Group A & 24-hr burn-in at 1.5X rated W@25°C⁷
- ❑ Opt. F: Flameproof coating
- ❑ Opt. B: Increased power (see Specifications chart)
- ❑ Opt. X: Non-inductive (see Performance Char. table)

Excellent Low Cost Replacement for Composition Resistors

Series PR pulse resistors withstand higher energy pulses than conventional film & wirewound types, without the performance disadvantages of carbon comp resistors. The heavy duty construction features a high thermal conductivity core and coating, enabling improved thermal transfer, long term stability, and environmental performance. Series PR satisfy a wide variety of pulse applications including lightning, snubber, in-rush current, capacitor charge, etc.




SPECIFICATIONS

RCD Type	Wattage Rating		Max. Continuous Voltage ^{1,5,8}	Max. Peak Pulse Voltage ^{2,5,8}	Resistance Range ⁵	L (Body Length)	D ⁶ (Body Dia.)	d±.003 [.08]	H ⁴ (min)
	Standard	Option B							
PR1/8	1/8W	1/2W	150V	2KV	0.1Ω-2K	.145±.025 [3.69±.64]	.062±.015 [1.6±.38]	.018 [.46]	1.0 [25.4]
PR1/4	1/4W	1W	250V	3.5KV	0.1Ω-10K	.240±.032 [6.1±.8]	.085±.025 [2.16±.64]	.022 [.56]	1.375 [35]
PR1/2	1/2W	2W	350V	5KV	0.1Ω-24K	.375±.040 [9.2±1]	.156±.025 [3.96±.64]	.032 [.8]	1.375 [35]
PR1	1W	4W	500V	10KV	0.1Ω-100K	.600±.040 [15.2±1]	.225±.032 [5.72±.8]	.032 [.8] ³	1.375 [35]
PR2	2W	5W	750V	15KV	0.1Ω-200K	.875±.062 [22.2±1.6]	.312±.032 [7.92±.8]	.040 [1] ³	1.375 [35]
PR5	5W	7W	800V	18KV	0.1Ω-220K	1.05±.062 [26.7± 1.6]	.350±.032 [8.89±.8]	.040 [1]	1.375 [35]
PR10	10W	12W	1000V	25KV	0.1Ω-300K	1.72±.062 [43.7±1.6]	.350±.032 [8.89±.8]	.040 [1]	1.375 [35]

¹ Max voltage = $\sqrt{P \times R}$, not to exceed value listed. ² Pulse voltage & energy capability is dependent on res. value, waveform, repetition rate, & environmental conditions (refer to R-42 for derating factors).
³ .040" (1mm) lead dia. is available on PR1 (specify PR1-18), .032" [.8mm] lead dia. is available on PR2 (specify PR2-20) ⁴ Lead length is for bulk packaging, taped parts may be shorter (consult taping dimensions)
⁵ Expanded range avail. ⁶ Allow .024" [.6mm] additional for Opt.X or values <1Ω ⁷ PR1/8 - PR2 with Opt. S receive burn-in at 150% rated W, PR5 - PR10 & Opt.B at 100% rated W ⁸ Multiply by 0.7 on Opt.X parts

SURGE CAPABILITY

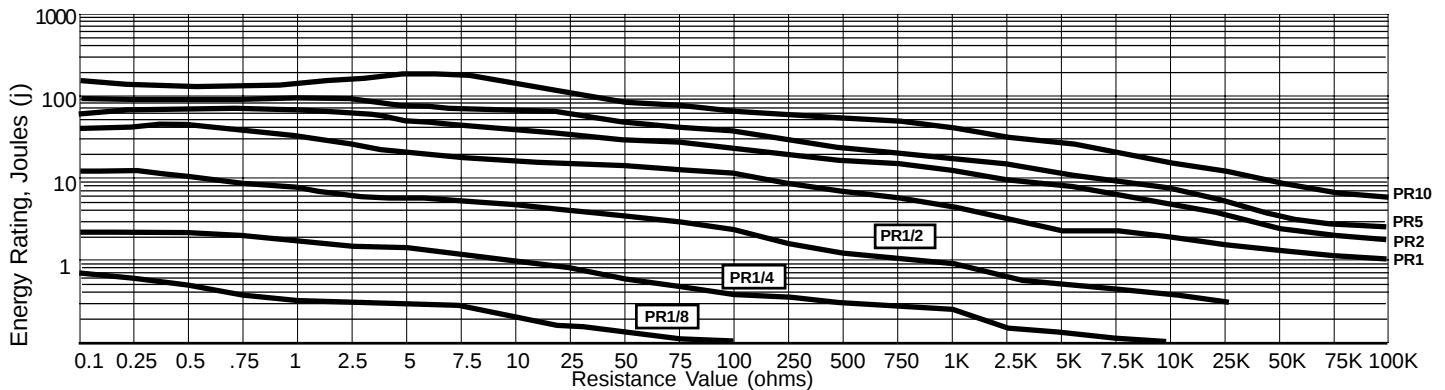

PERFORMANCE CHARACTERISTICS, Typ.

Derating, Wattage & Voltage	1.25%/°C >70°C (Opt. B to be derated 0.8%/°C >25°C)
Max. Induct*: Opt. X ≤ 50Ω	0.2uH PR1/8-1/2, .3uH PR1-2
Max. Induct*: Opt. X > 50Ω	0.37uH PR1/8-1/2, .6uH PR1-2
Short-time Overload	±0.5%
Temperature Cycling	±0.5%
TCR (20 & 50ppm avail.)	±100ppm/°C (<0.2Ω=200ppm)
Moisture Resistance	±1%
Shock and Vibration	±0.2%
Effect of Soldering	±0.2%
Voltage Coefficient	±0.005%/V
Load Life	±0.5% Std, ±1% Opt.B
Operating Temp Range	-55 to +150°C, +275°C avail.
Dielectric Strength	500V (1KV avail.)

* specify Opt. 75 for induct levels 50% that of Opt.X, or Opt. 76 for 33% that of Opt.X

APPLICATION NOTE

Use chart above to select model to meet desired surge level. Pulse not to exceed peak V & j ratings (derate 30% for Opt.X), and average power during repetitive pulses nte rated W. 30% safety factor is recommended for infrequent pulses, 50% typ. for repetitive pulses (refer to Note R42 for derating factors attributable to pulse width, rep. rate, temp., altitude, humidity). Verify by evaluating under worst-case conditions. Depending on specifics, PR series can often satisfy the surge requirements of UL-217, -268, -294, -497, -508, -913, -943, -991, -1459, -1971, ANSI/IEEE C62.41, CCITT (Rec. K17), Bellcore TR-NWT-001089 & TR-TSY-000057, CSA C22.2-225, IEC 664, IEC 801.5, IEEE587, Can.Doc. CS-03, FCC Part 68, etc. Consult factory for assistance.

P/N DESIGNATION:

PR1/2 - **102** - **K** **T** **W**
RCD Type _____
Options: X, S, F, ER, B (leave blank if std)
Resis. Code 1% tol: 3 signif. figures & multiplier, e.g. R100=0.1Ω, 1R00=1Ω, 10R0=10Ω, 1000=100Ω, 1001=1K.
2%-10%: 2 signif. fig. & multiplier (R10=0.1Ω, 1R0=1Ω, 100=10Ω, 102=1K)
Tolerance: J=5% (standard), F=1%, G=2%, K=10%
Packaging: B = bulk, T = Tape & Reel
Optional TC: 20 =20ppm, 50= 50ppm (leave blank if standard)
Termination: W= Lead-free, Q= Tin/Lead (leave blank if either is acceptable)