


Amorphous Power Inductor


- For smoothing switching power supply output
- Rated Current: 8ADC
- Low core-loss at high frequency
- Amorphous iron cores with precised gap are used in the coil

Schematic Diagram;



Mechanical Specifications;

Figure A (See sheet 2 for Figure B)

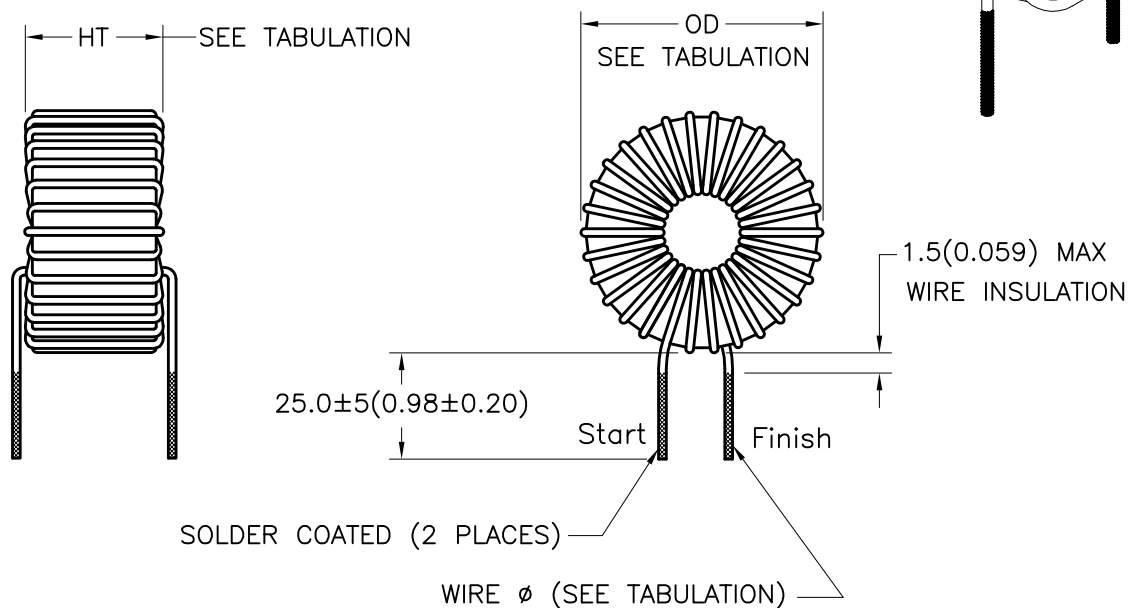

Part Number	Rated Current (ADC)	Inductance (uH)±25%	DCR (mΩ) MAX	Wire Dia (ømm)	Dimension OD mm(In) MAX	Dimension HT mm(In) MAX	Mechanical Figure
NAC-08-0051	8	50	14	0.9X2	29(1.14)	19(0.75)	B
NAC-08-0101	8	100	17	1.4	34(1.34)	20(0.79)	A
NAC-08-0151	8	150	30	0.9X2	34(1.34)	20(0.79)	B
NAC-08-0201	8	200	27	1.4	43(1.69)	21(0.83)	A
NAC-08-0301	8	300	35	1.4	43(1.69)	21(0.83)	A
NAC-08-0501	8	500	50	1.4	48(1.89)	28(1.10)	A
NAC-08-0751	8	750	70	1.4	56(2.20)	28(1.10)	A

PREPARED BY:

K. BRENNAN

NOTE: Inductance is measured at 20 KHz with specified DC current

ENGINEER:

M. PITCHAI

DWG CONTROL NO.
P-A4-13603
ACAD\MXFMR\A4136031.DWG

REV

—

8A POWER INDUCTOR FOR
SWITCH MODE POWER SUPPLIES

QUALITY CONTROL:

T. CLEM

CONTENTS OF THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT
PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(951) 699-1270 FAX 9516769482

NAC-08 SERIES

MODEL SPECIFICATION

DIM: mm(In) SCL: 1/1 SH: 1 OF 2

APPROVED:

Y. SEKIGUCHI

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

MODEL NUMBER

NAC-08 SERIES


Amorphous Power Inductor



MODEL NUMBER



NAC-08 SERIES

Schematic Diagram;



Mechanical Specifications;

Figure B (See sheet 1 for Figure A)

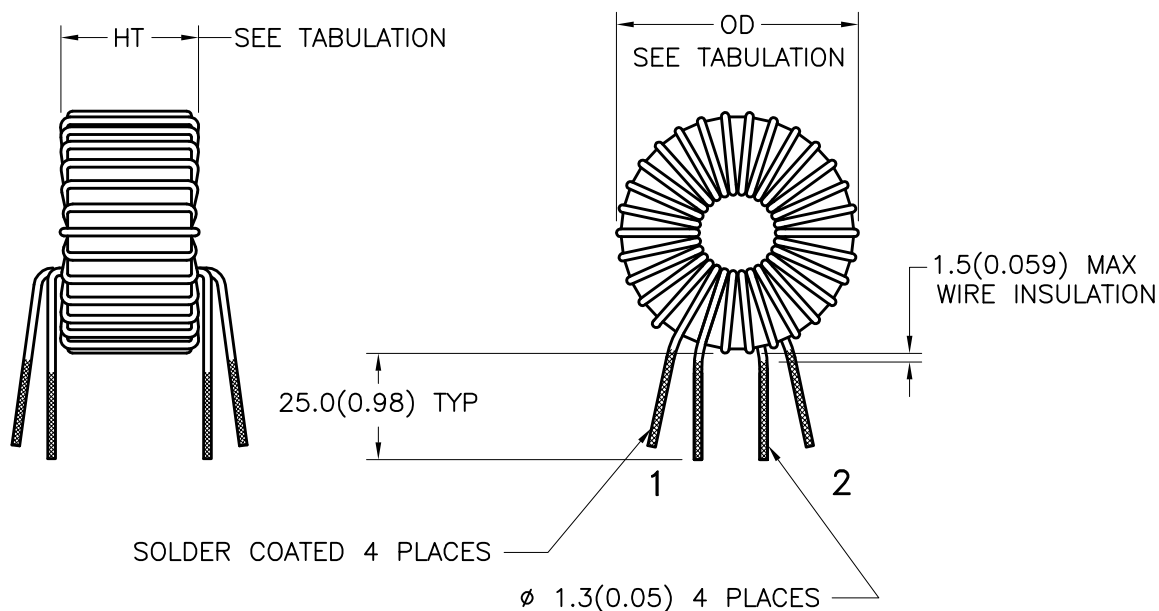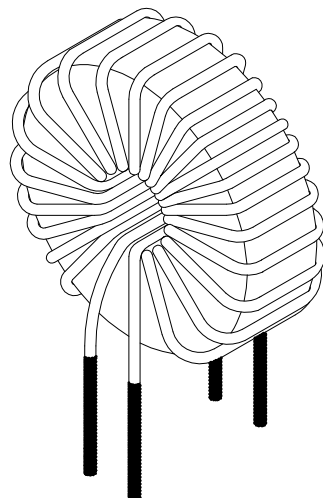

PREPARED BY:

K. BRENNAN

ENGINEER:

M. PITCHAI

QUALITY CONTROL:

T. CLEM

APPROVED:

Y. SEKIGUCHI

DWG CONTROL NO.
P-A4-13603
ACAD\MXFMR\A4136032.DWG

REV
—

8A POWER INDUCTOR FOR
SWITCH MODE POWER SUPPLIES

CONTENTS OF THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT
PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(951) 699-1270 FAX 9516769482

NAC-08 SERIES

MODEL SPECIFICATION

DIM: mm(In) SCL: 1/1 SH: 2 OF 2

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Tamura:

[NAC-08-0051](#) [NAC-08-0101](#) [NAC-08-0151](#) [NAC-08-0201](#) [NAC-08-0301](#) [NAC-08-0501](#) [NAC-08-0751](#)