


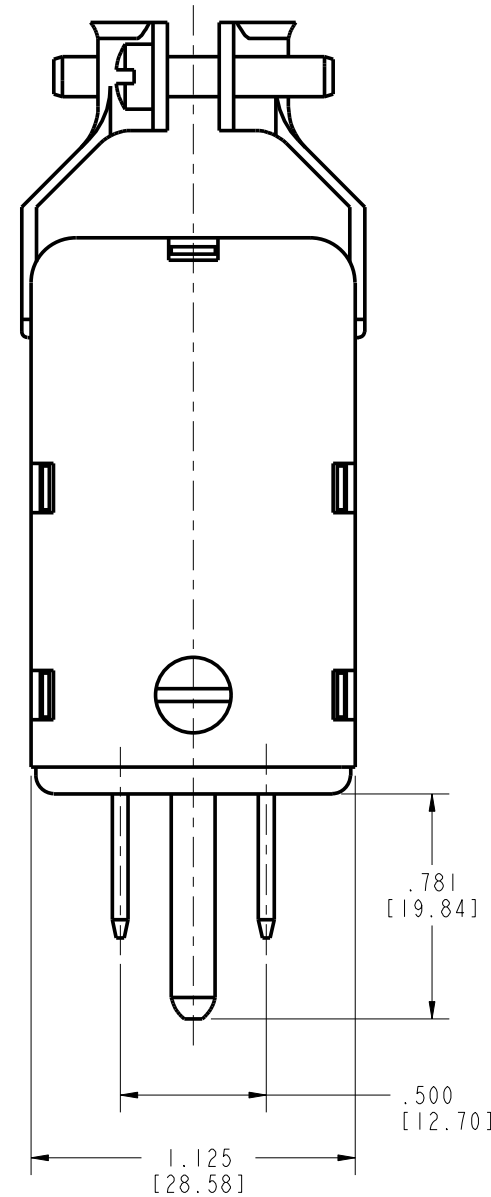

DRAWING REVISIONS			
REV	DOCUMENT	APP	DATE
I	DO 06-1068		

NOTES:

I. SPECIFICATIONS:

ELECTRICAL:

OPERATING VOLTAGE: 250 VAC RMS

CURRENT RATING: 15 AMPS

CURRENT RESISTANCE: 1.0 MILLIOHMS MAXIMUM

INSULATOR: MOLDED MONBLOCK, GENERAL PURPOSE PHENOLIC, BLACK

CONTACT: BRASS, MATTE TIN

BRACKET, SCREW: STEEL, ZINC WITH CLEAR TRVALENT CHROME

CAP: BLACK CRINKLE

LINER: PAPER, CELLULOSE BASED, UL 94V-0

ENVIRONMENTAL:
OPERATING TEMPERATURE: UP TO +105°C

TERMINATION: SOLDER

2. DIMENSIONS IN [] ARE MILLIMETERS

3. ALL DIMENSIONS ARE REFERENCE

PART NUMBER	SIZE	L	CABLE OPENING	FACTORY NUMBER
P-2404H-CCT	4	1.063 [27.00]	.438 [11.13]	703 03 04 002
P-2406H-CCT	6	1.500 [38.10]	.438 [11.13]	703 03 06 002
P-2408H-CCT	8	1.938 [49.23]	.563 [14.30]	703 03 08 002
P-2410H-CCT	10	2.375 [60.33]	.563 [14.30]	703 03 10 002
P-2412H-CCT	12	2.813 [71.45]	.625 [15.88]	703 03 12 002

RoHS COMPLIANT

UNITS	ENGLISH INCHES		PRO/E	Cinch	JIMENEZ 1700 FINLEY RD LOMBARD, IL. 60148			
DO NOT SCALE DRAWING		DRAWN BY	DATE	TITLE				
UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES FILLET/RADIUS .02 MAX TOLERANCES .X ± .1 .XX ± .01 XXX ± .005 ANGULAR ± .5°		JIMENEZ	8/1/06	PLUG AND CAP ASSEMBLIES				
		DESIGN ENGINEER	A. BALI	8/1/06	MATERIAL		CONTROL SPEC NUMBER	
		DESIGN ENGINEERING MGR.		MATERIAL SPEC NUMBER		FINISH	PROJECT NUMBER	
							C14789-2	
THIS DOCUMENT IS THE PROPERTY OF CINCH. NEITHER THIS DOCUMENT NOR ANY OF THE INFORMATION CONTAINED IN IT MAY BE DUPLICATED OR DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF CINCH.		MFG. ENGINEERING		CAD FILE NUMBER		DRAWING NUMBER		
				P2404HCCT		P-2404H-CCT		
		QUALITY ASSURANCE		CAGE IDENT NO. / SIZE		SCALE		
				71785 B		1.000	SHEET 1 OF 1	