



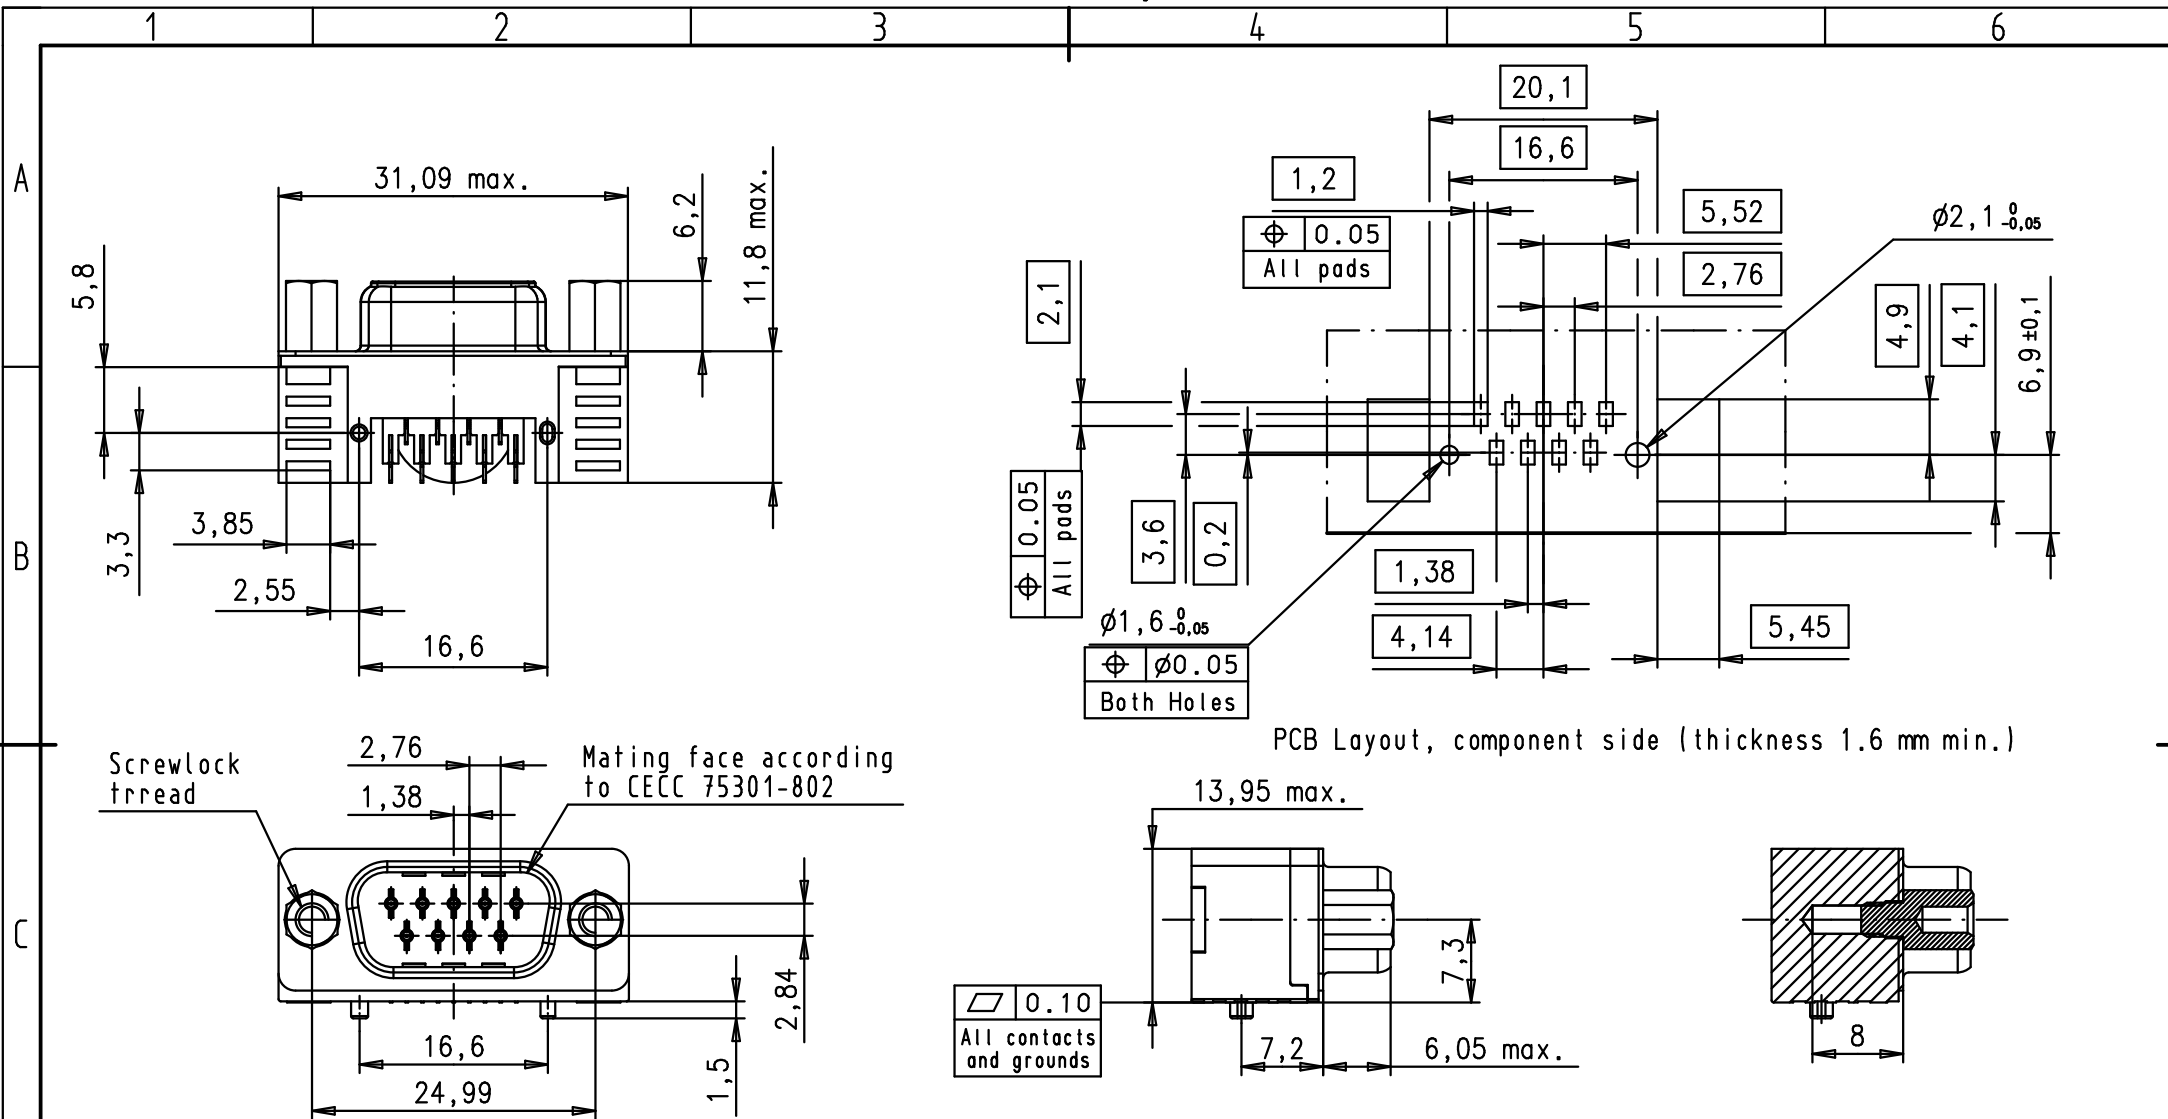

Max. Temperature : 260° during 10 seconds

09551663813.741	1	4-40 UNC	Black Insulator	Reel Packaging (140 connectors) see page 2/2					Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-SUB SMT Standard Male 9p with die casted grounds and screwlocks	Maßstab/ Scale 1,5:1
09551666813.741	2							Detail.	17Jul2006	ED			
09551667813.741	3												
09551663833.741	1	M3			EC01199	11Jan2010	ED	Insp.					
09551666833.741	2				34399	22Aug2007	ED	Stand.					
09551667833.741	3				33929	25Jan2007	ED						

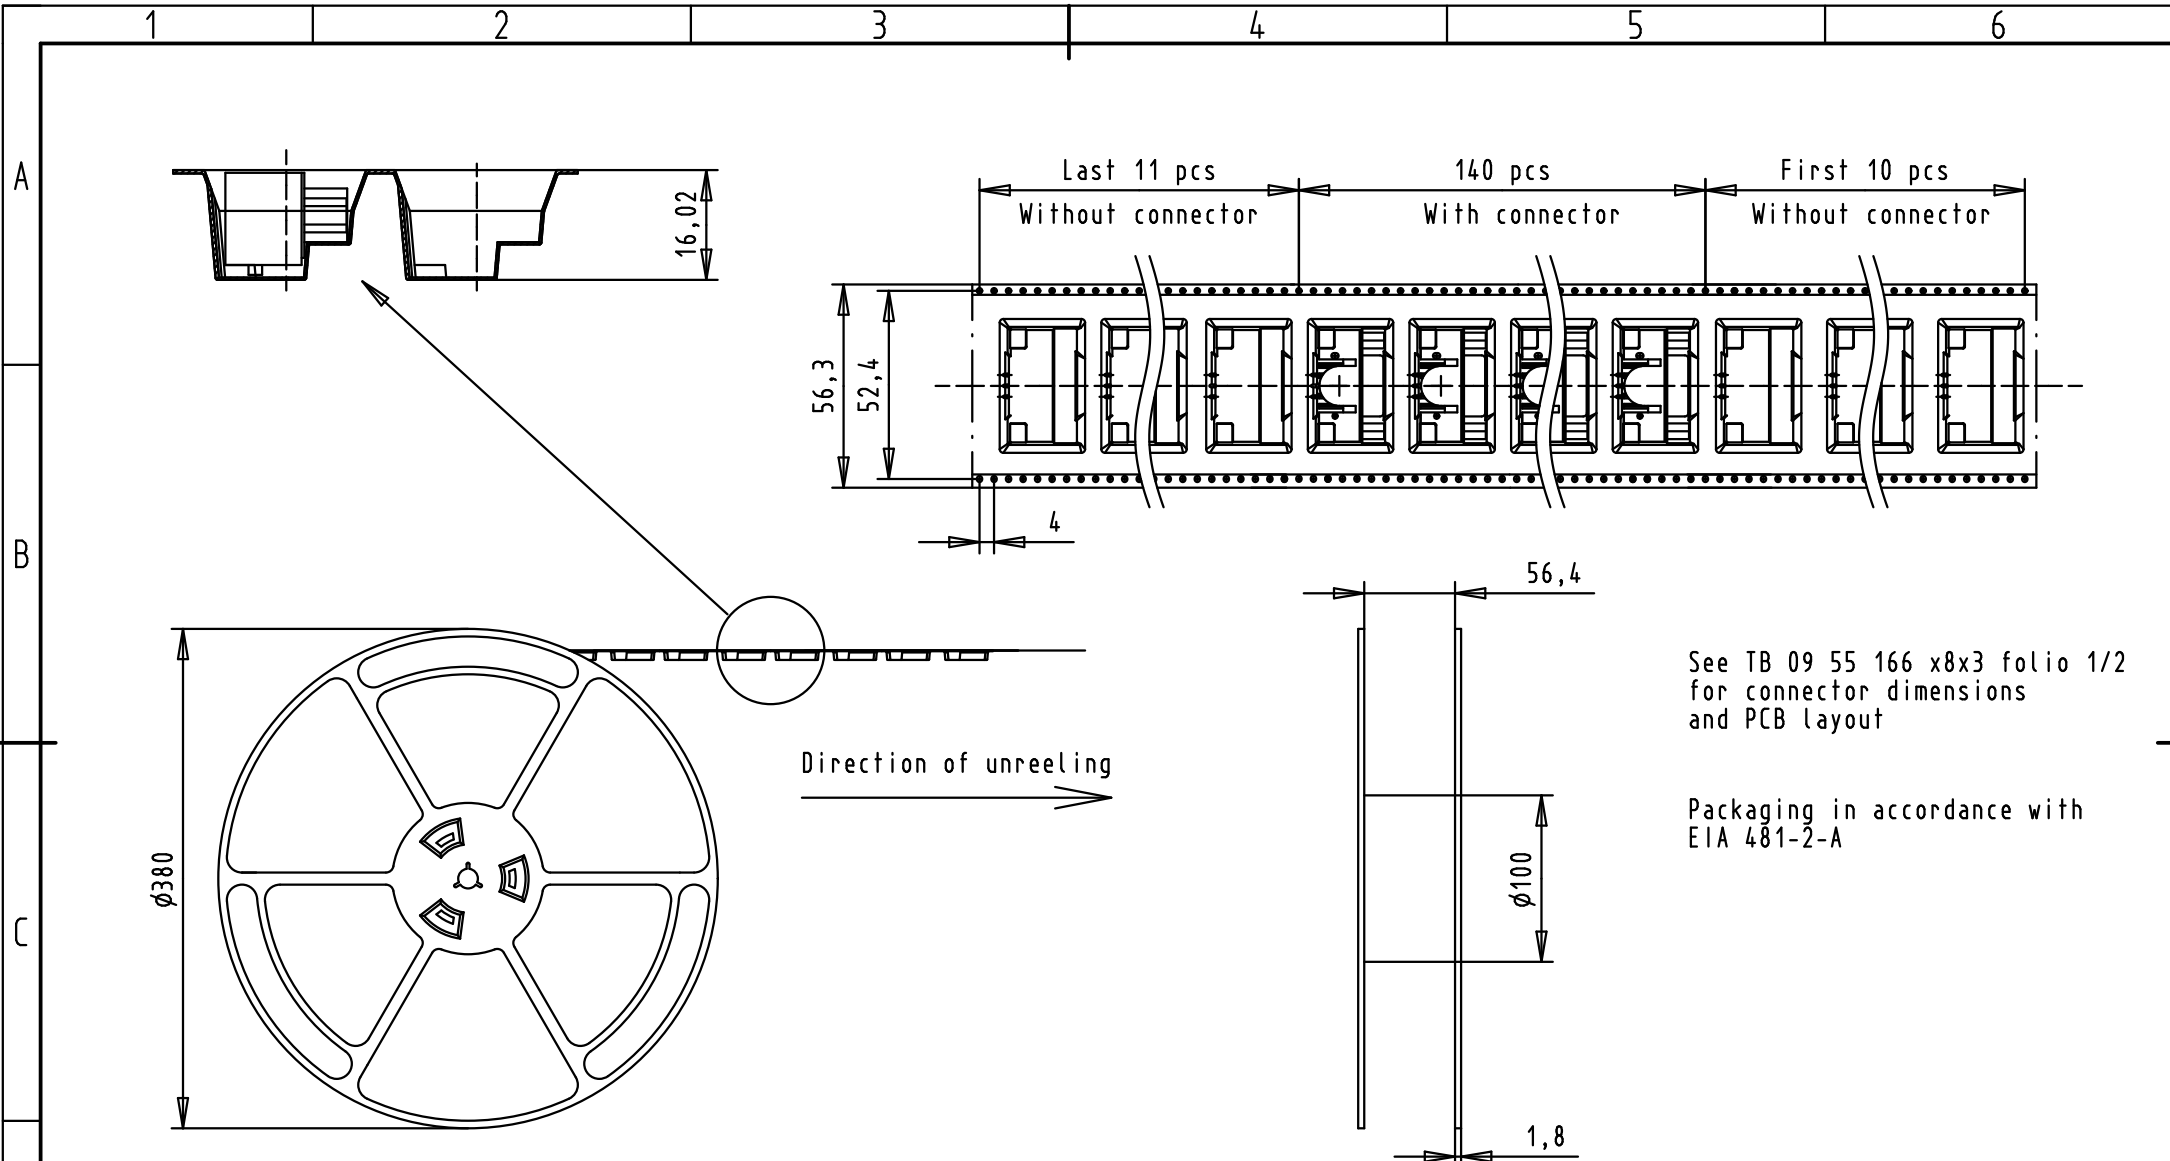

09551663813.741	1	4-40 UNC	Black Insulator	Reel Packaging (140 connectors)	EC01199	11Jan2010	ED		Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-SUB SMT Standard Male 9p with die casted grounds and screwlocks	Maßstab/ Scale	
09551666813.741	2				EC01118	26Nov2009	LP	Detail.	17Jul2006	ED				
09551667813.741	3				34399	22Aug2007	ED	Insp.						
09551663833.741	1	M3			33975	02Apr2007	ED	Stand.			HARTING EURL F-95972 Paris		TB 09 55 166 x8x3	Blatt/ Page 2 / 2
09551666833.741	2				33929	25Jan2007	ED							
09551667833.741	3				33785	17Jul2006	ED							
Part number	PL	Thread	Index designation		Mod.	Dat.	Name						Sub.	