
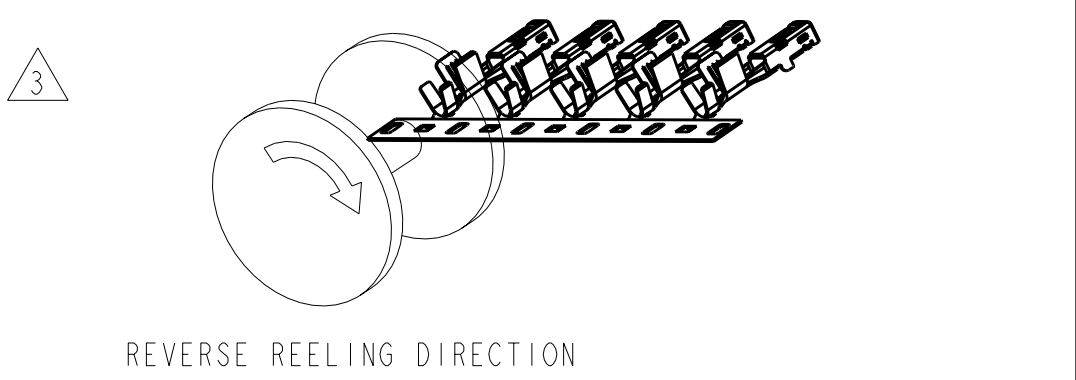





LOC		DIST		REVISIONS						
GE	00	P	LTR	DESCRIPTION			DATE	DWN	APVD	
			E1	REVISED PER ECO-11-005030			26APR2011	RK	HMR	

1 MATERIAL: 0.30 THICK COPPER ALLOY, PREPLATED WITH 0.0008 MINIMUM THICK REFLOW TIN OR BRIGHT TIN (ELV COMPLIANT).

ALTERNATE MATERIAL: 0.30 THICK COPPER ALLOY, PREPLATED WITH 0.0008 MINIMUM THICK BRIGHT TIN (ELV COMPLIANT).

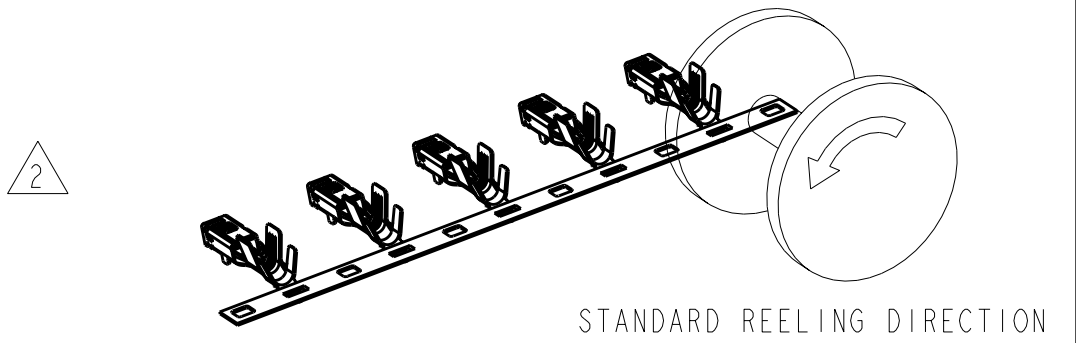

4. QUALIFICATION OF THE CRIMP APPLICATION TOOLING SHALL BE CONTROLLED BY THE REQUIREMENTS ESTABLISHED UNDER USCAR 21.
5. LOOSE END SPLICING TO BE USED.

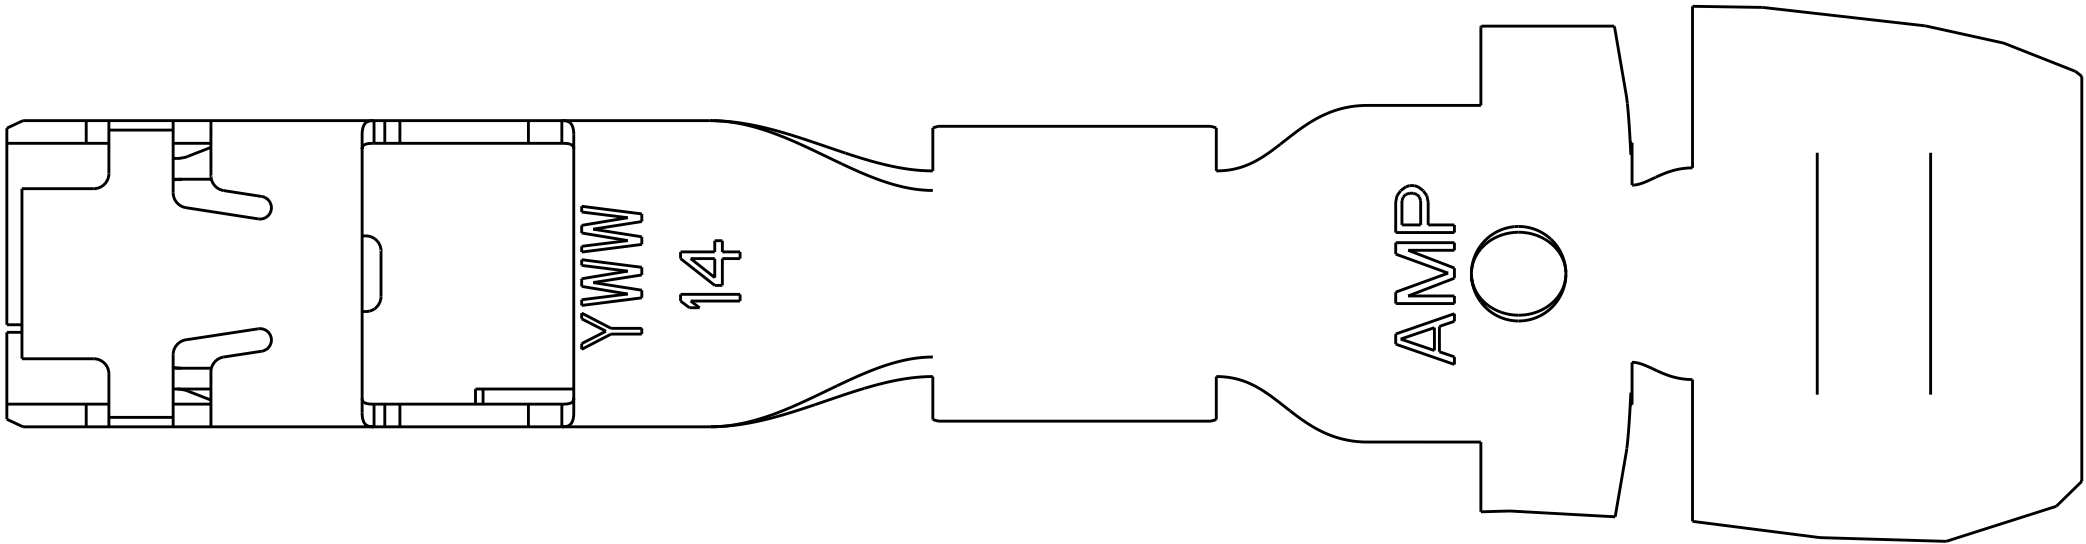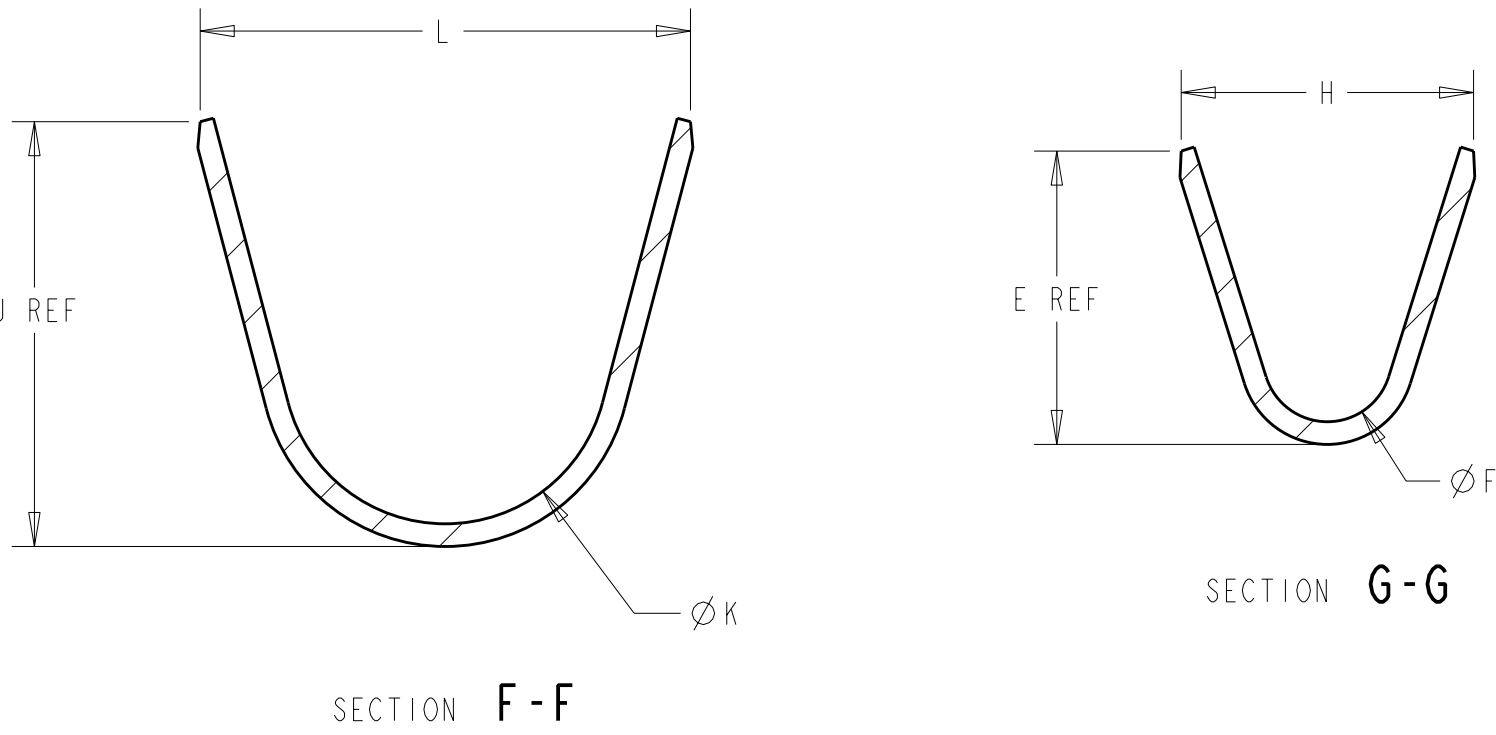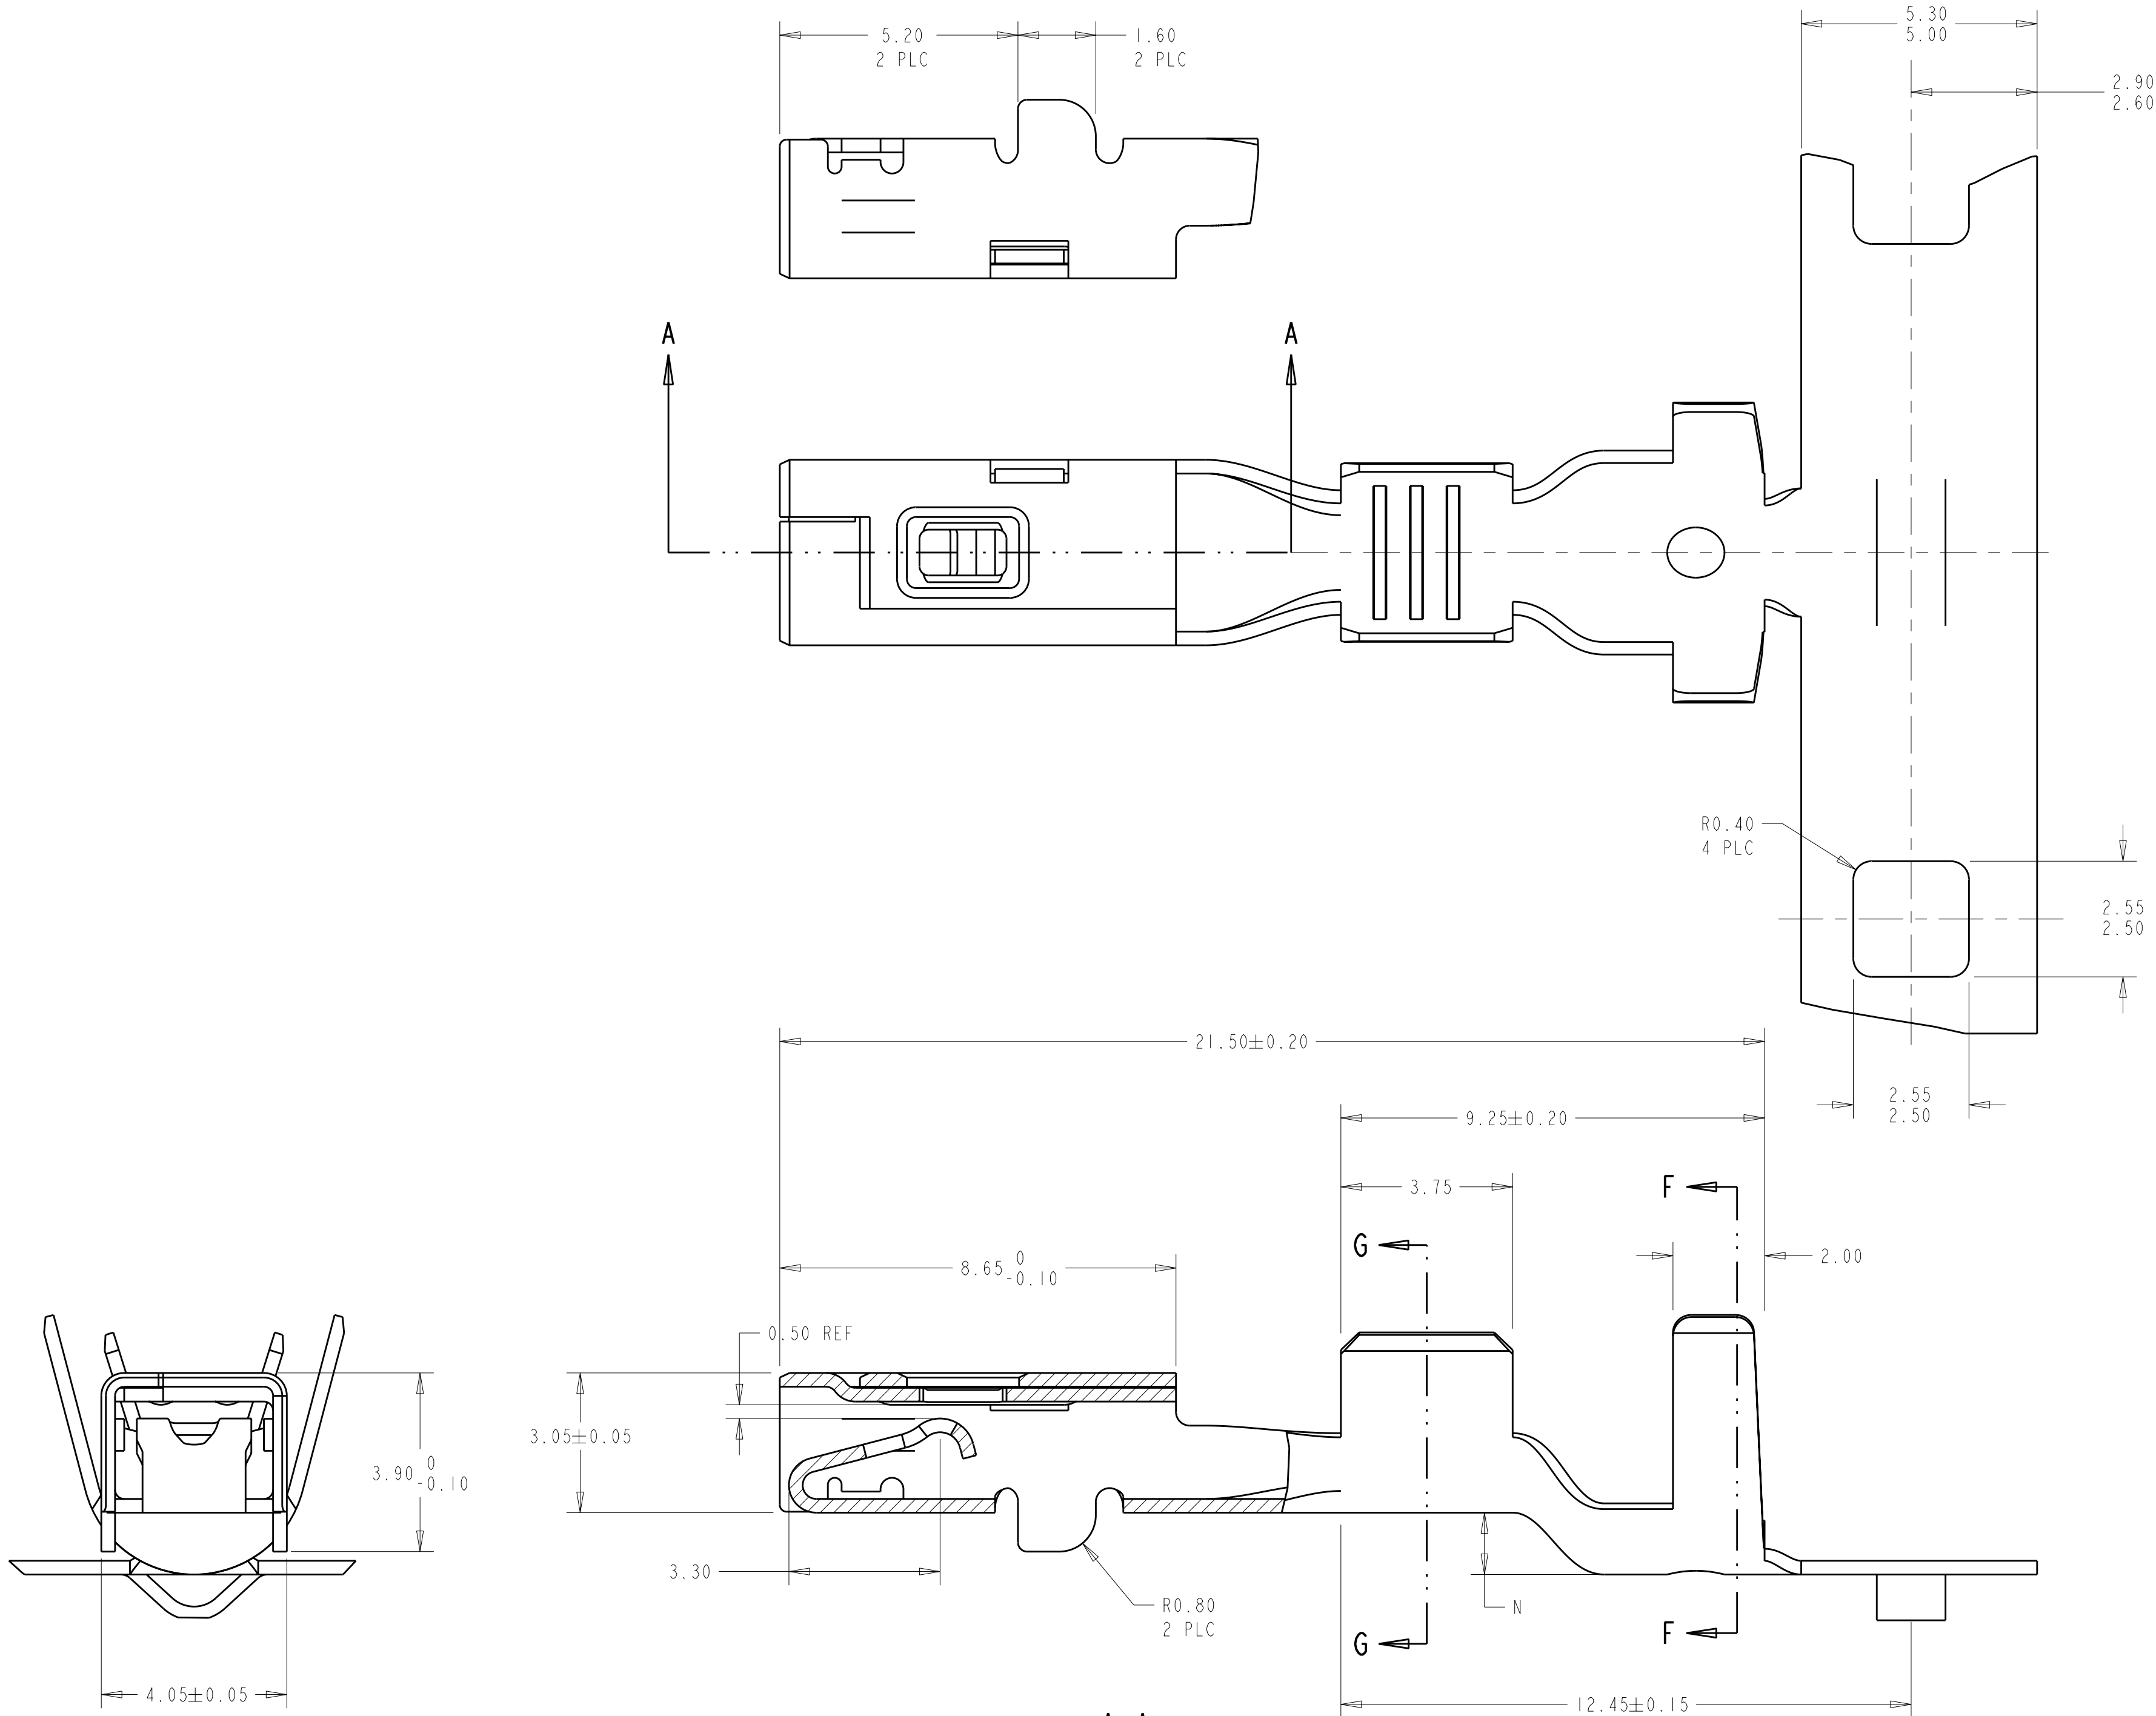

3	1326032-6 REELED FOR AMP APPLICATORS							12 AWG	I-1326032-2
	1326032-5 REELED FOR AMP APPLICATORS							14 AWG	I-1326032-1
	1326032-4 REELED FOR AMP APPLICATORS							16 AWG	I-1326032-
	1326032-3 REELED FOR AMP APPLICATORS							18 AWG	1326032-9
	1326032-2 REELED FOR AMP APPLICATORS							20 AWG	1326032-8
	1326032-1 REELED FOR AMP APPLICATORS							22 AWG	1326032-7
2	1.35	6.8	4.30	6.09	4.7	2.70	5.25	12 AWG	1326032-6
	1.35	6.5	4.30	5.62	3.9	1.70	3.88	14 AWG	1326032-5
	1.10	5.6	3.80	4.54	3.9	1.70	3.88	16 AWG	1326032-4
	1.10	5.6	3.80	4.54	3.3	1.30	2.76	18 AWG	1326032-3
	0.90	5.0	3.40	4.11	3.3	1.30	2.76	20 AWG	1326032-2
	0.90	5.0	3.40	4.11	2.5	0.90	2.11	22 AWG	1326032-1
REELING	N	L	ØK	J	H	ØF	E	WIRE SIZE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. STRAUSSER 28APR99		TE Connectivity	
CHK D. BROWN 28APR99		APVD D. BROWN 28APR99		NAME	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
mm		9 PLC ±.3		SAE/USCAR-2 8/97	
mm		2 PLC ±0.10		APPLICATION SPEC	
mm		3 PLC ±.1		114-13013	
mm		4 PLC ±.1		WEIGHT	
mm		ANGLES ±4°		100779	
MATERIAL		FINISH		C=1326032	
				CUSTOMER DRAWING	
				SCALE 10:1	
				SHEET 1 OF 1	
				REV E1	