
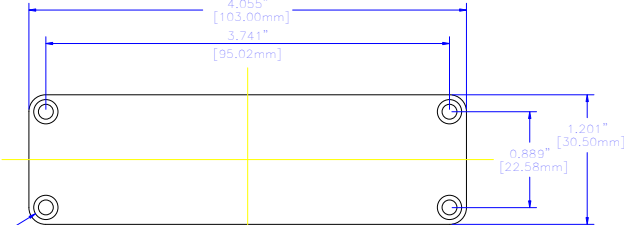



NOTES

Constructed from extruded Al with a minimum thickness of 0.060”(1.50mm)
Available in clear or Black anodized finish
Version 1 includes two Al end panels, and two Black plastic bezels.
Hardware and self-adhesive rubber feet included.




Ø0.225" [Ø5.71mm]
82° COUNTERSINK
#4 HEAD,
#6 SCREW

PANEL


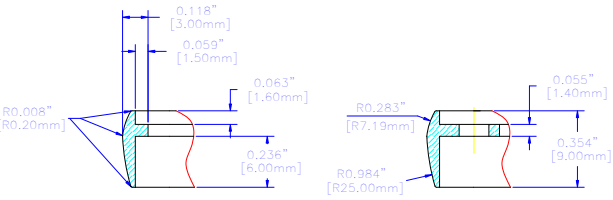


SECTION A-A
SCALE 2:1

SECTION B-B
SCALE 2:1

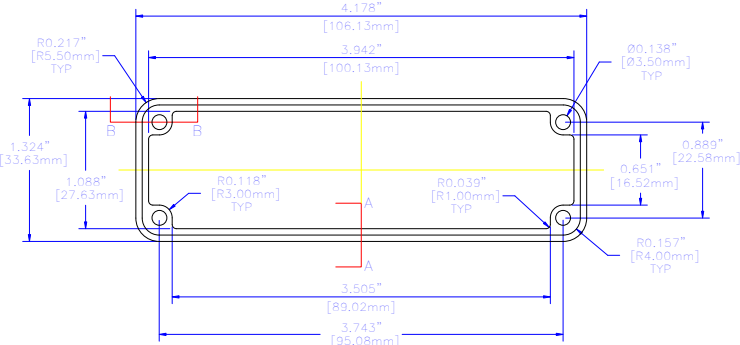

BEZEL

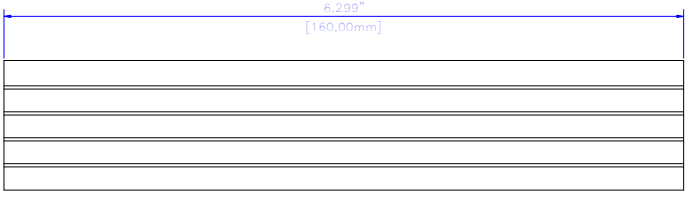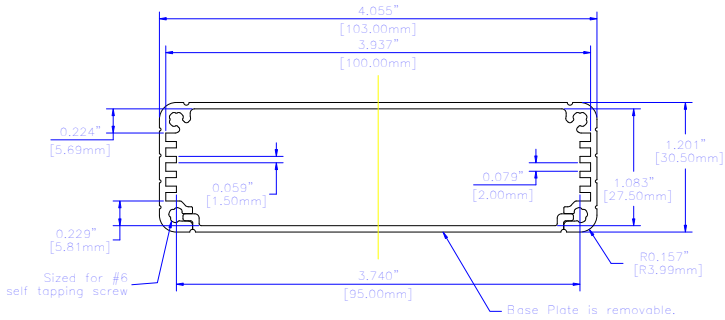

EXTRUSION

THIS DRAWING IS PROPRIETARY INFORMATION
OF HAMMOND MFG.CO.LTD. NOT TO BE USED
WITHOUT EXPRESSED WRITTEN PERMISSION
OF HAMMOND MFG.CO.LTD.


Rev	EC	Description	Date	By

Unless otherwise specified dimensions are in inches Tolerances are:	
.X	± .1
.XX	± .02
.XXX	± .010
.XXXX	± .0005
Holes	± .0050
Angles	± .5°

Dwn	T. SPARKS
Date	04 11 02
Chk	---
Mat'l	Extruded Aluminum
Sheet	1 of 2



HAMMOND MANUFACTURING CO. LTD. Electronics Group, Waterloo, Ont. — Cheektowaga, NY	
HAMMOND 1455 SERIES EXTRUDED ALUMINUM	
Part #: 1455L1601	Dwg: 1455L1601/A

For the best fit print
on legal size paper.

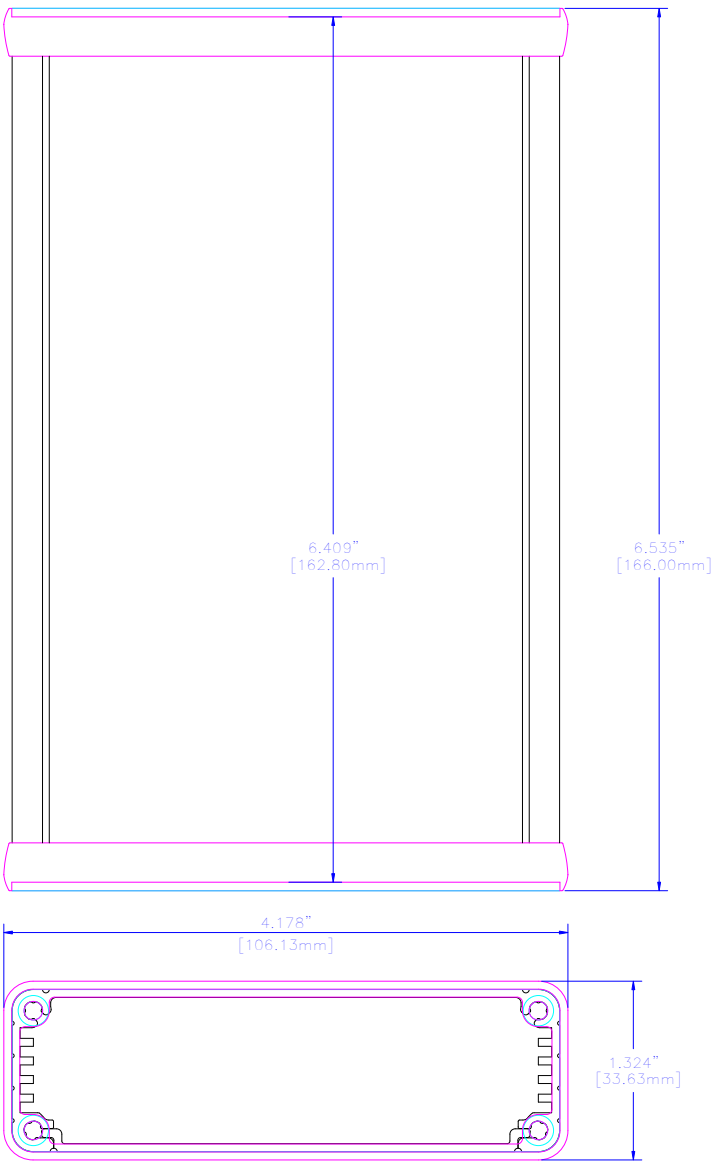

NOTES

Constructed from extruded Al with a minimum thickness of 0.060”(1.50mm)
Available in clear or Black anodized finish
Version 1 includes two Al end panels, and two Black plastic bezels.
Hardware and self-adhesive rubber feet included.

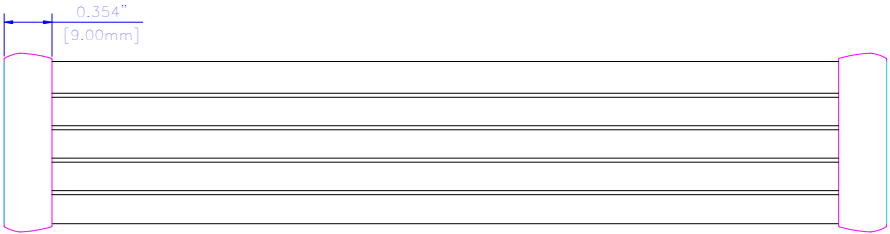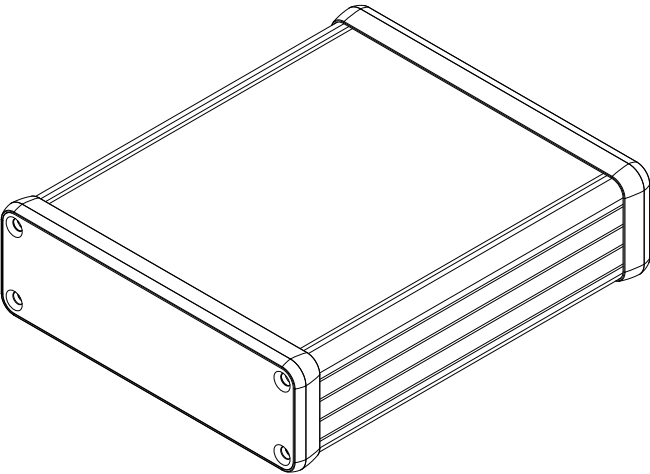

ASSEMBLED

THIS DRAWING IS PROPRIETARY INFORMATION
OF HAMMOND MFG.CO.LTD. NOT TO BE USED
WITHOUT EXPRESSED WRITTEN PERMISSION
OF HAMMOND MFG.CO.LTD.

Rev	EC	Description		Date	By

Unless otherwise specified
dimensions are in inches
Tolerances are:

.X	± .1
.XX	± .02
.XXX	± .010
.XXXX	± .0050
Holes	± .005
Angles	± .5°



Dwn	T. SPARKS
Date	04 11 02
Chk	---
Mat'l	Extruded Aluminum
Sheet	2 of 2

 HAMMOND MANUFACTURING CO. LTD.
Electronics Group, Waterloo, Ont. - Cheektowaga, NY

HAMMOND 1455 SERIES
EXTRUDED ALUMINUM

Part #: 1455L1601 Dwg: 1455L1601/A

For the best fit print
on legal size paper.