
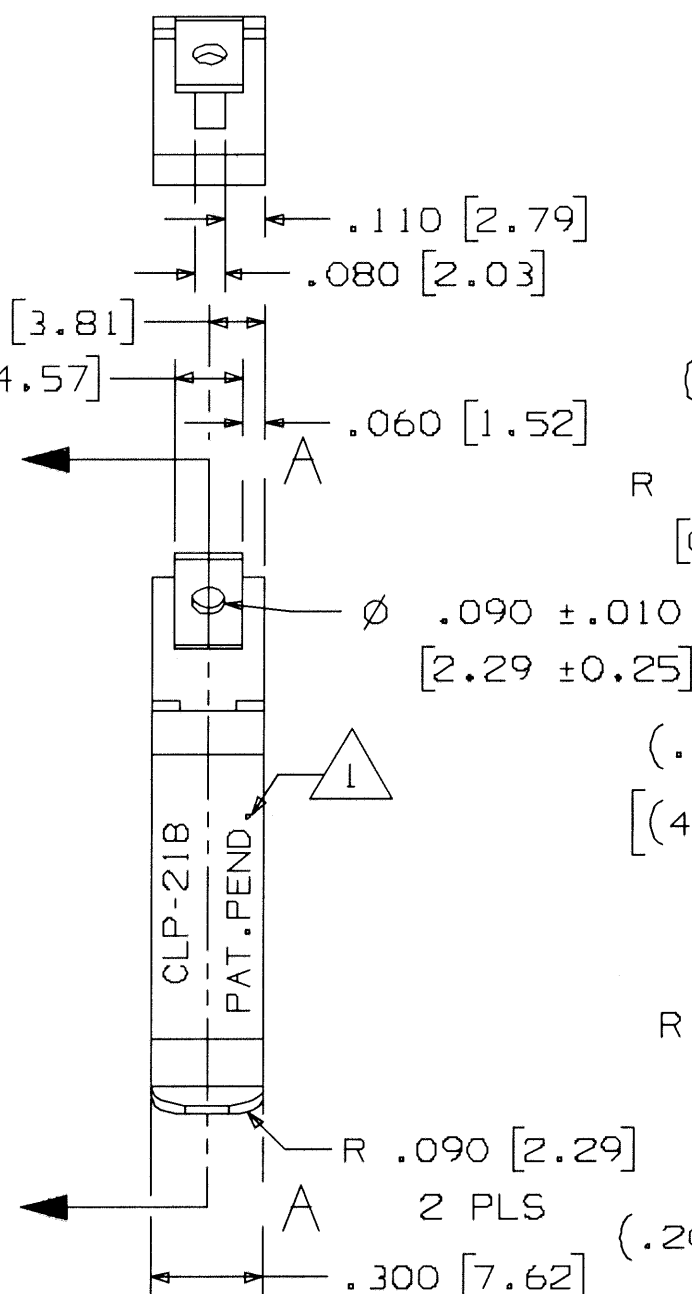




- 1 MARK PART "CLP-218" AND "PAT.PEND." TO BE STAMPED APPROX. AS SHOWN. LETTERING DIRECTION OPTIONAL.
- 2 WHERE A CONDITION SUCH AS A THICK INSULATOR (GREATER THAN .010 [.25]) IS REQUIRED A RECESSED AREA SUCH AS SHOWN WITH HATCHING MUST BE DESIGNED INTO THE EXTRUSION. DEPTH IS IN DIRECT RELATION TO THE INSULATOR THICKNESS.
- 3 WHEN A RECESSED AREA IS REQUIRED THIS IS A MINIMUM REQUIREMENT FOR EXTRUDING PURPOSES. THIS IS ALSO RECOMMENDED FOR OTHER AREAS AROUND THE SLOT.
- 4 $1.275 \pm .030$ [$32.38 \pm .76$] DIMENSION IS TO THE TANGENT POINT OF THE CLIP CREATED BY THE CLIP RADIUS AND THE $.050 \pm .010$ - $.025$ [$1.26 \pm .25$ - $.64$] DIMENSION.

D	04/25/03	RELEASE PER ECN #015569	JB
REV.	DATE	DESCRIPTION	CHK 'D
		AAVID THERMALLOY	80 COMMERCIAL ST CONCORD, N.H. 03301
DRAWING NO.		033474	
STANDARD DESCRIPTION			
THM, 19820 REV G			
DATE	DRAWN	ENGR.	APP'D
04/24/03	P.C.	JB	JB
			SCALE
			2.000
SHEET			