
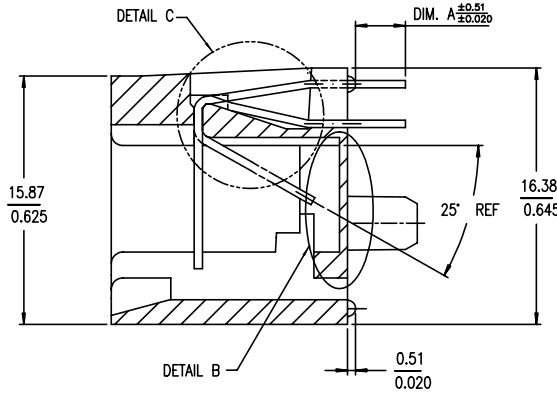
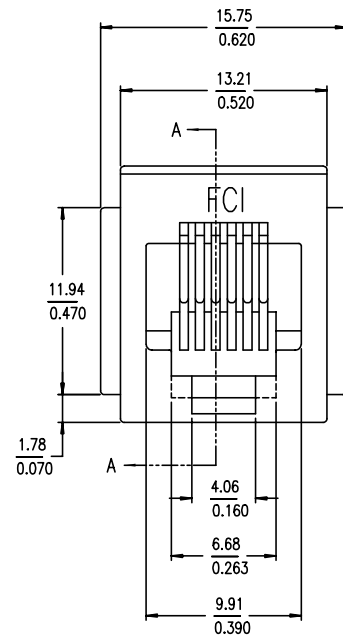
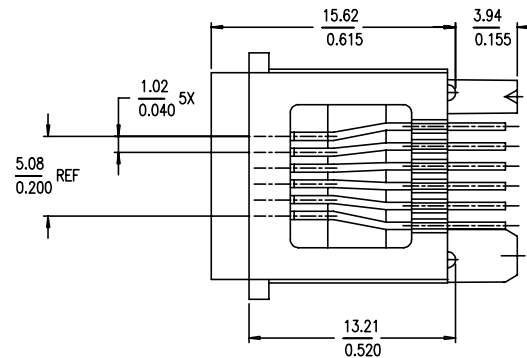

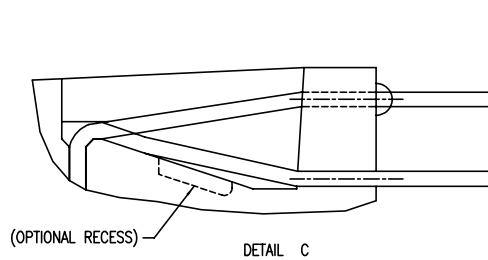


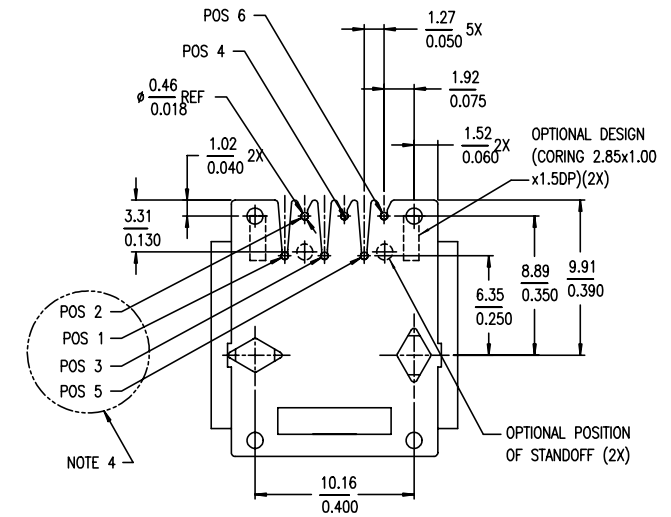

SECTION A-A

DETAIL B -90° ROTATED
(OPTIONAL DESIGN
BERG TAIWAN ONLY)


mat'l. code				surface		tolerance		projection		product family	
ISO1302				ISO1101		ISO406		mm		MOD JACK	
tolerances unless otherwise specified				angle		scale		title		6 POS VERTICAL	
S S90142 JSR 10/4/99				0°±2'		0.X±0.3		scale 2.0		PC.B. MOD JACK ASSY	
T N06-0134 LONG 5/19/06				0°±2'		0.XX±0.15		scale 2.0		69254	
U N08-0239 SH MNO 11/10/08				0°±2'		0.XXX±0.05		scale 2.0		A4	
V N09-0092 SH MNO 5/25/09				0°±2'		0°±2'		scale 2.0		type Product Customer Drawing	
W ELX-N-010680 SH MNO 3/14/12				0°±2'		0°±2'		scale 2.0		sheet 1 of 2	
dr CATHY LIN 10/21/97				0°±2'		0°±2'		scale 2.0		size	
engr TONY CHIEN 10/21/97				0°±2'		0°±2'		scale 2.0		sheet 1 of 2	
chr TONY CHIEN 10/21/97				0°±2'		0°±2'		scale 2.0		size	
appd JENN TSAO 10/21/97				0°±2'		0°±2'		scale 2.0		sheet 1 of 2	
sheet index				revision		W W		scale		size	
sheet 1				revision		W W		scale		size	

PRODUCT NO.	POSITIONS LOADED	CONTACT PLATING	HOUSING COLOR	DIM. A	NOTES
69254-001/001LF	ALL	5u" Au + high performance lubricant	BLACK	3.18	-
-002/002LF	2,3,4,5	5u" Au + high performance lubricant	BLACK		-
-003/003LF	3,4	5u" Au + high performance lubricant	BLACK		-
-004/004LF	2,3,4,5	5u" Au + high performance lubricant	BLACK		-
-005/005LF	3,4	50u" /1,27u GXT	BLACK		-
-006/006LF	3,4	5u" Au + high performance lubricant	BLACK		-
-007/007LF	ALL	50u" /1,27u GXT	BLACK		-
-008/008LF	ALL	5u" Au + high performance lubricant	BLACK		-
-009	ALL	5u" Au + high performance lubricant	BLACK		NOTE 1
-010	2,3,4,5	50u" /1,27u GXT	BLACK		-
-011	ALL	5u" Au + high performance lubricant	GREY		-
-012	2,3,4,5	15u" GXT	BLACK		-
-001A	ALL	5u" Au + high performance lubricant	BLACK	3.94	NOTE 3
-001L	ALL	5u" Au + high performance lubricant	BLACK		-
-002L	2,3,4,5	5u" Au + high performance lubricant	BLACK		-
-013	3,4	6u" /0.15um GXT	BLACK	3.18	-
-014	2,3,4,5	2u" /0.05um GXT	BLACK	3.18	-
69254-001HLF	ALL	5u" Au + high performance lubricant	BLACK	3.18	-
-002HLF	2,3,4,5	5u" Au + high performance lubricant	BLACK		-
-003HLF	3,4	5u" Au + high performance lubricant	BLACK		-
-004HLF	2,3,4,5	5u" Au + high performance lubricant	BLACK		-
-005HLF	3,4	50u" /1,27u GXT	BLACK		-
-006HLF	3,4	5u" Au + high performance lubricant	BLACK		-
-007HLF	ALL	50u" /1,27u GXT	BLACK		-
-008HLF	ALL	5u" Au + high performance lubricant	BLACK		-

H: MEETS PIP PROCESS PRODUCT NO.

NOTE :

- ① SPECIAL PACKAGING.
- 2 ALL THE SPECS OF 69254-001A ARE SAME AS 69254-001 EXCEPT THE HSG HAS NO ANY "OPTIONAL DIMS".
- ③ THIS PIN NUMBERING IS OPPOSITE TO FCC, PART 68, SUBPART F REQUIREMENTS.
- 4 ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- 5 IF "LF" P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- 6 THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER PROCESS.
- ⑦ PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

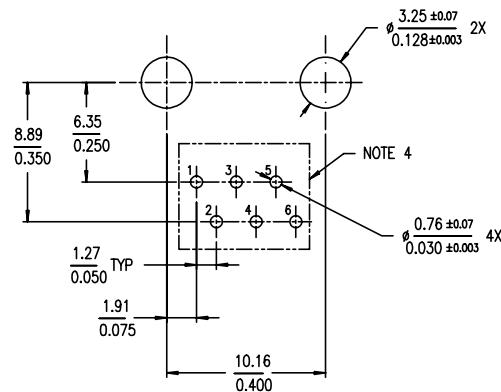BOARD LAYOUT
VIEWED FROM TOP

mat'l. code				surface		tolerance		projection		product family											
				ISO1302		ISO1101 ISO406				MOD JACK											
ltr		ecn		nodr		date		tolerances unless otherwise specified		title											
S		S90142		JSR		10/4/'99		angle		0.X±0.3				6 POS VERTICAL PC.B. MOD JACK ASSY							
T		N06-0134		LONG		5/19/06		linear		0.XX±0.15											
U		N08-0239		SH MNO		11/10/08		0°±2'		0.XXX±0.05											
V		N09-0092		SH MNO		5/25/09		dr		CATHY LIN		10/21/97				dwg no		sheet 2 of 2		size	
W		ELX-N-010680		SH MNO		3/14/12		engr		TONY CHIEN		10/21/97									
								chr		TONY CHIEN		10/21/97									
								appd		JENN TSAO		10/21/97		type		Product		Customer		Drawing	
sheet		revision																			
index		sheet																			