

TOSHIBA SOLID STATE GTR DRIVER MODULE


TF1202

TOSHIBA TF1202 is the GTR driver designed for use with TOSHIBA Giant Transistor Module and it includes the optical isolator and GTR driver circuit.

Using this driver, you can design high reliability and compact system.

- 2000V_{RMS} Optical Isolation
- Logic Compatible Input
- High Speed Switching Response
: $t_{pLH}=2\mu s$, $t_{pHL}=3\mu s$ (Typ.)
- Small Size and Light Weight

Unit in mm

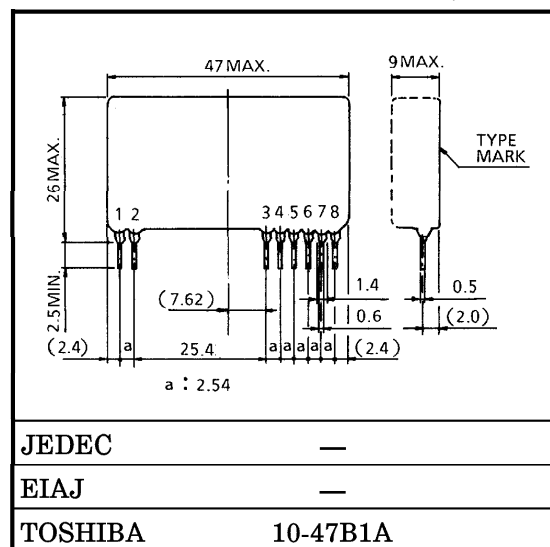


Weight : 12g


MAXIMUM RATINGS (T_a = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{CC}	8.5	V
	V _{EE}	−5	V
Input Voltage	V _{IN}	5.5	V
Reverse Input Voltage	V _{RIN}	5	V
High Level Output Current	I _{OH}	−2	A
Low Level Peak Output Current	I _{OLP}	6 (10μs)	A
Isolation (Input-Output)	BV _S / AC	2000 (1min)	V
Operating Frequency	f	5	kHz
Operating Temperature	T _{opr}	−20~70	°C
Storage Temperature	T _{stg}	−20~100	°C

BLOCK DIAGRAM

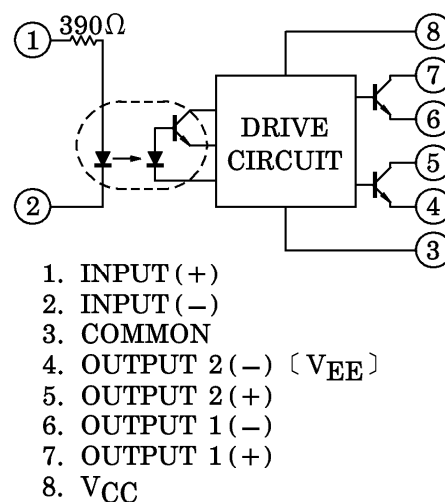

CIRCUIT DIAGRAM

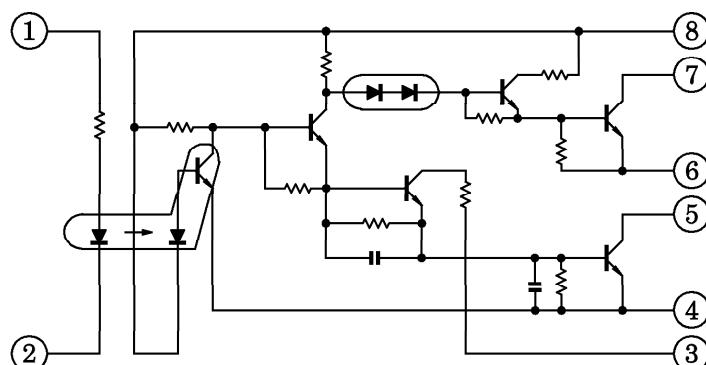



RECOMMENDED OPERATING CONDITIONS (Ta = - 10~50°C)







CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	VCC	—	6	7	8	V
	VEE	—	-3.5	-4	-4.5	V
High Level Input Voltage	VIH	—	—	5	—	V
External Resistor	Rex1	—	—	3.3	—	Ω
	Rex2	—	0.22	0.5	—	Ω
Operating Frequency	f	—	—	2	—	kHz





ELECTRICAL CHARACTERISTICS (Ta = 25°C, VCC = 7V, VEE = -4V, Rex1 = 2.5Ω, Rex2 = 0.22Ω)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Current	IIN	VIN = 5V	7	8.5	10	mA
High Level Input Voltage	VIH	IOH = -2A	—	2.5	4.5	V
Low Level Input Voltage	VIL	IOLP = 5A	1.0	2	—	V
High Level Output Current	IOH	VIN = 5V, VO = 1.5V	—	-2	—	A
Low Level Peak Output Current	IOLP	VIN = 0V	—	4.6	—	A
(Low→High) Propagation Delay Time	tpLH	VIN = 0→5V	—	2	7	μs
(High→Low) Propagation Delay Time	tpHL	VIN = 5→0V	—	3	7	μs
Power Dissipation	PD	f = 2kHz, D.f = 50%	—	0.7	—	W

TEST CIRCUIT

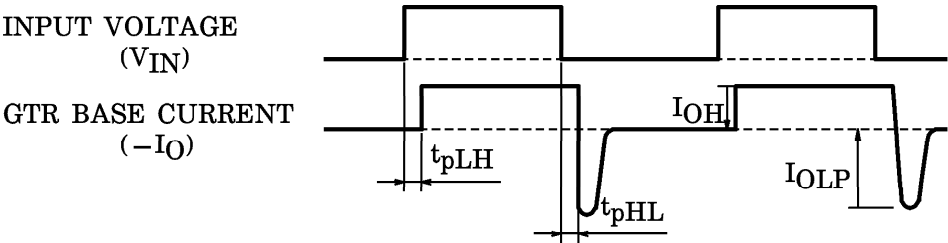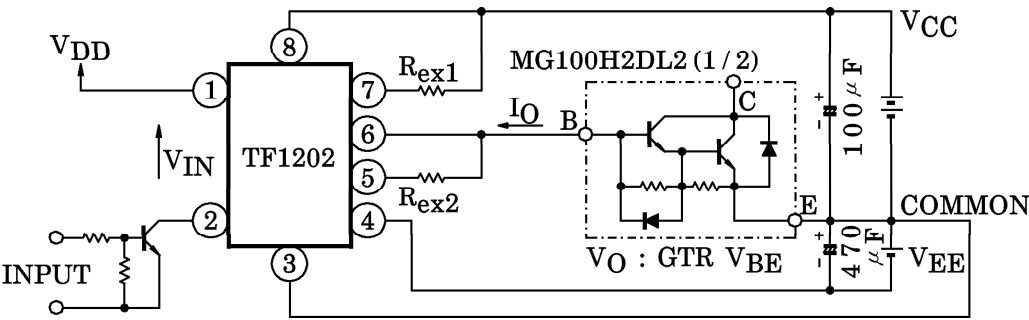

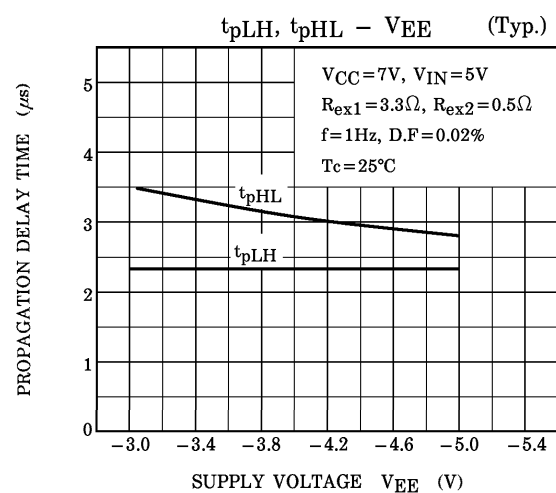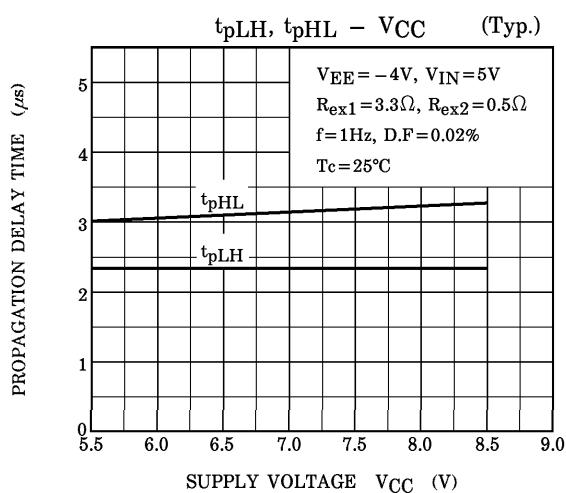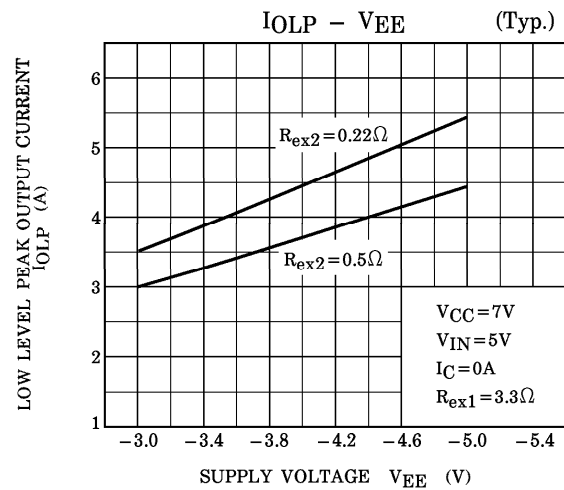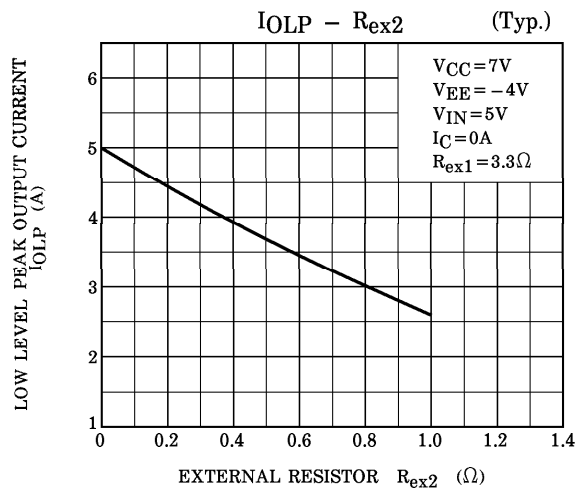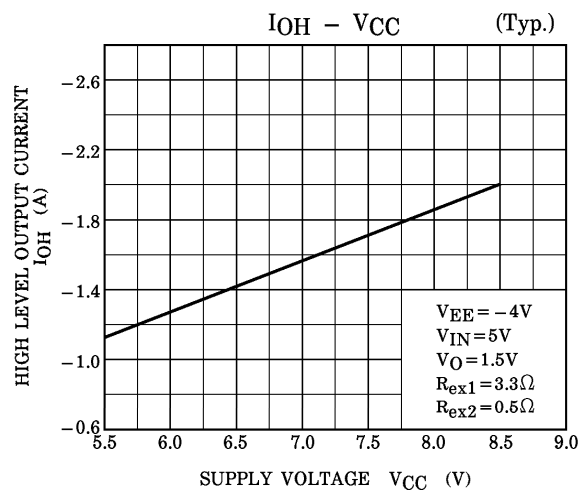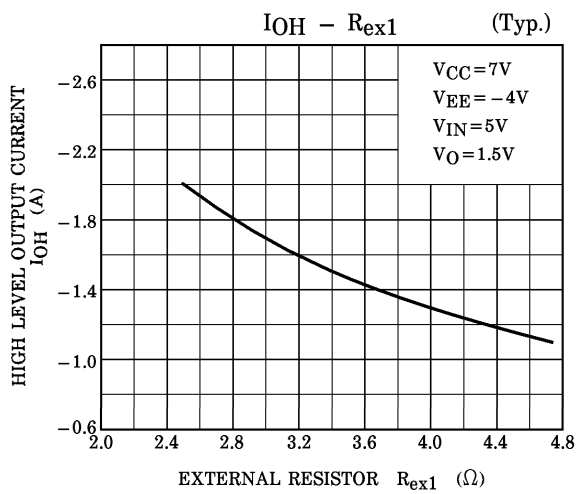

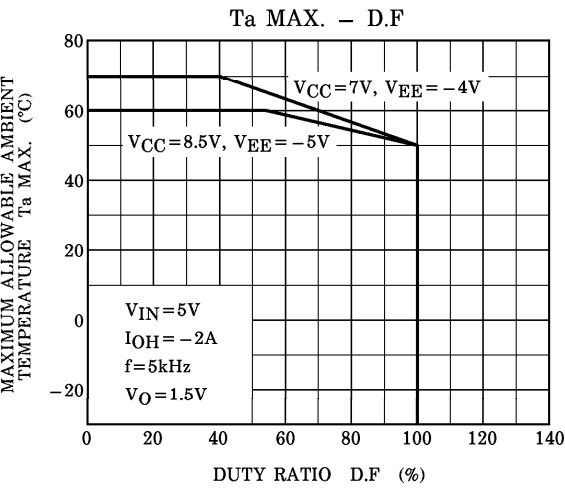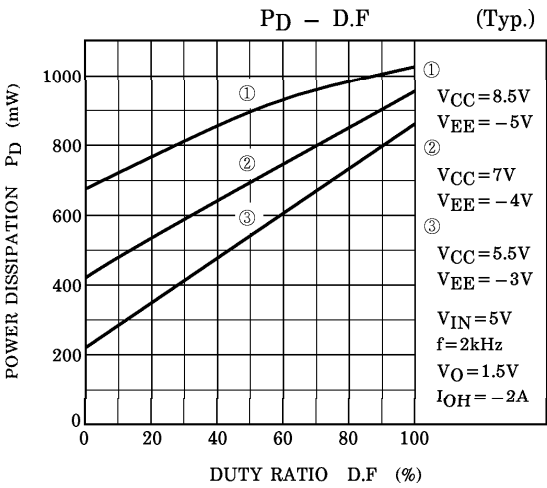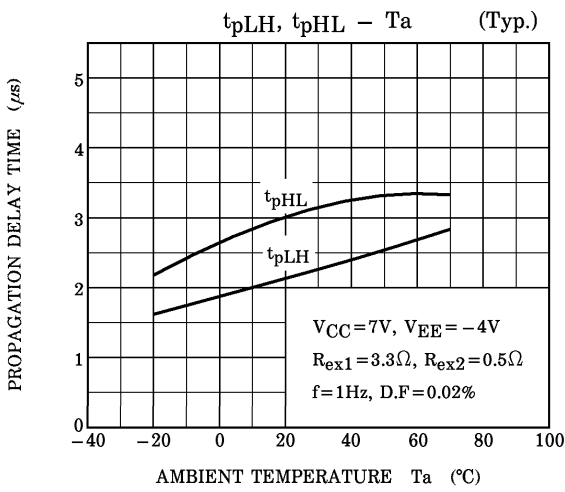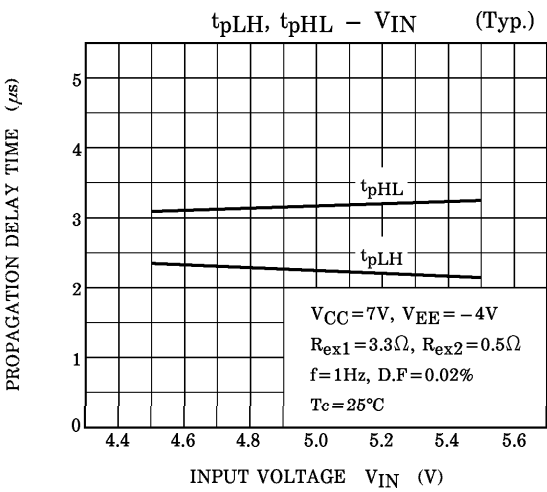

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.