


FIBER OPTIC TRANSCEIVING MODULE

TODX283

FIBER OPTIC TRANSCEIVING MODULE FOR  
DUPLEX DIGITAL SIGNAL COMMUNICATION

Uni in mm

- Data rate : DC to 50 Mb / s (NRZ code)
- Transmission distance  
: Up to 10 m (APF)  
Up to 100 m (PCF)
- Ceramic Package Type
- TTL interface
- ATC (Automatic Threshold Control)  
circuit is used for stabilized output at  
wide range of optical power level.
- For PN and F07 type connector

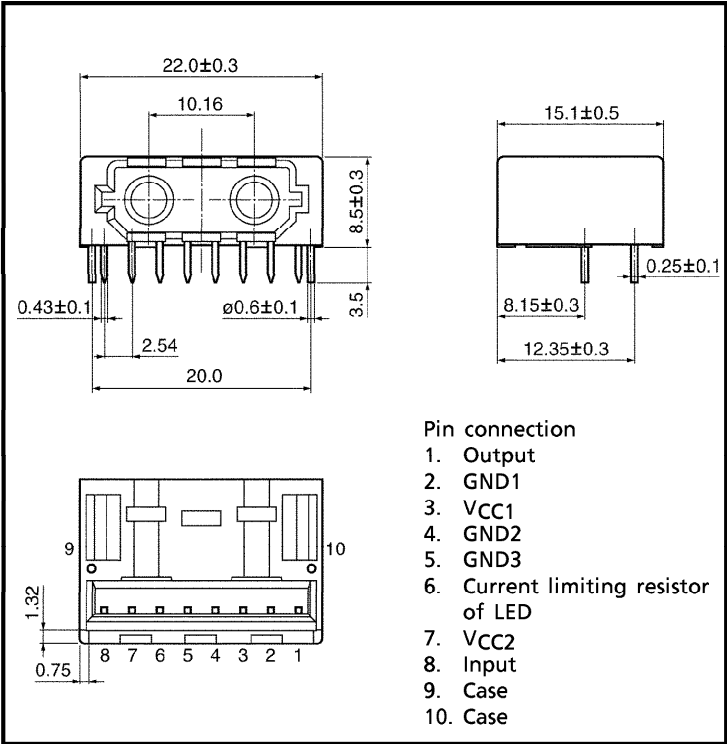

1. Maximum Ratings (Ta = 25°C)

| PARAMETER                 | SYMBOL           | RATING                        | UNIT |
|---------------------------|------------------|-------------------------------|------|
| Storage Temperature       | T <sub>stg</sub> | -40 to 85                     | °C   |
| Operating Temperature     | T <sub>opr</sub> | -10 to 70                     | °C   |
| Supply Voltage            | V <sub>CC</sub>  | -0.5 to 7                     | V    |
| Input Voltage             | V <sub>IN</sub>  | -0.5 to V <sub>CC</sub> + 0.5 | V    |
| Low Level Output Current  | I <sub>OL</sub>  | 20                            | mA   |
| High Level Output Current | I <sub>OH</sub>  | -1                            | mA   |
| Soldering Temperature     | T <sub>sol</sub> | 260 <sup>(1)</sup>            | °C   |

Note <sup>(1)</sup> Soldering time  $\leq 3$  s (More than 1 mm apart from the package).

Handling precaution : The LEDs used in this product contain GaAs (Gallium Arsenide).  
Care must be taken to protect the safety of people and the  
environment when scrapping or terminal processing.

## 2. Recommended Operating Conditions


| PARAMETER                 | SYMBOL          | MIN  | TYP. | MAX             | UNIT |
|---------------------------|-----------------|------|------|-----------------|------|
| Supply Voltage            | V <sub>CC</sub> | 4.75 | 5.0  | 5.25            | V    |
| Data Rate                 | —               | 20   | —    | 50              | Mb/s |
| Mark Rate                 | —               | —    | 50   | —               | %    |
| High Level Input Voltage  | V <sub>IH</sub> | 2.0  | —    | V <sub>CC</sub> | V    |
| Low Level Input Voltage   | V <sub>IL</sub> | 0    | —    | 0.8             | V    |
| High Level Output Current | I <sub>OH</sub> | —    | —    | −1.6            | mA   |
| Low Level Output Current  | I <sub>OL</sub> | —    | —    | 1.6             | mA   |

3. Electrical and Optical Characteristics (Ta = −10 to 70°C, V<sub>CC</sub> = 5 ± 0.25V)

| PARAMETER                               |         | SYMBOL           | CONDITION                                  | MIN   | TYP. | MAX   | UNIT   |
|-----------------------------------------|---------|------------------|--------------------------------------------|-------|------|-------|--------|
| Data Rate                               |         | —                | NRZ Code                                   | DC    | —    | 50    | Mb / s |
| Transmission Distance                   |         | —                | Using PCF <sup>(2)</sup>                   | 0.1   | —    | 10    | m      |
|                                         |         |                  | Using PCF <sup>(3)</sup>                   | 0.1   | —    | 100   | m      |
| Pulse Width Distortion                  |         | $\Delta tw$      | 50Mb / s Random Pattern                    | −7    | —    | 7     | ns     |
| Fiber Output Power                      | Input H | Pf(H)            | APF 1m <sup>(4)</sup> , R = 4.3 k $\Omega$ | −10   | —    | −6.5  | dBm    |
|                                         | Input L | Pf(L)            | APF 1m <sup>(4)</sup> , R = 4.3 k $\Omega$ | —     | —    | −30   | dBm    |
|                                         | Input H | Pf(H)            | PCF 1m <sup>(4)</sup> , R = 4.3 k $\Omega$ | −18.5 | —    | —     | dBm    |
|                                         | Input L | Pf(L)            | PCF 1m <sup>(4)</sup> , R = 4.3 k $\Omega$ | —     | —    | −37   | dBm    |
| Center Wavelength                       |         | $\lambda c$      |                                            | —     | 650  | —     | nm     |
| Maximum Receivable Power <sup>(5)</sup> |         | P <sub>MAX</sub> | APF <sup>(2)</sup> , 50 Mb / s             | −6.5  | —    | —     | dBm    |
|                                         |         | P <sub>MAX</sub> | PCF <sup>(3)</sup> , 50 Mb / s             | −14   | —    | —     | dBm    |
| Minimum Receivable Power <sup>(5)</sup> |         | P <sub>MIN</sub> | APF <sup>(2)</sup> , 50 Mb / s             | —     | —    | −15.5 | dBm    |
|                                         |         | P <sub>MIN</sub> | PCF <sup>(3)</sup> , 50 Mb / s             | —     | —    | −21.5 | dBm    |
| Current Consumption                     |         | I <sub>CC</sub>  | —                                          | —     | 100  | 130   | mA     |
| High Level Input Voltage                |         | V <sub>IH</sub>  | —                                          | 2.0   | —    | —     | V      |
| Low Level Input Voltage                 |         | V <sub>IL</sub>  | —                                          | —     | —    | 0.8   | V      |
| High Level Output Voltage               |         | V <sub>OH</sub>  | —                                          | 2.7   | —    | —     | V      |
| Low Level Output Voltage                |         | V <sub>OL</sub>  | —                                          | —     | —    | 0.5   | V      |

<sup>(2)</sup> All Plastic Fiber (980 / 1000 μm)<sup>(3)</sup> Plastic Cladding Silica Fiber (200 / 230 μm)<sup>(4)</sup> Peak Value. Measured with standard optical fiber.<sup>(5)</sup> BER ≤ 10<sup>−9</sup>. Peak Value.

## 5. Application Circuit

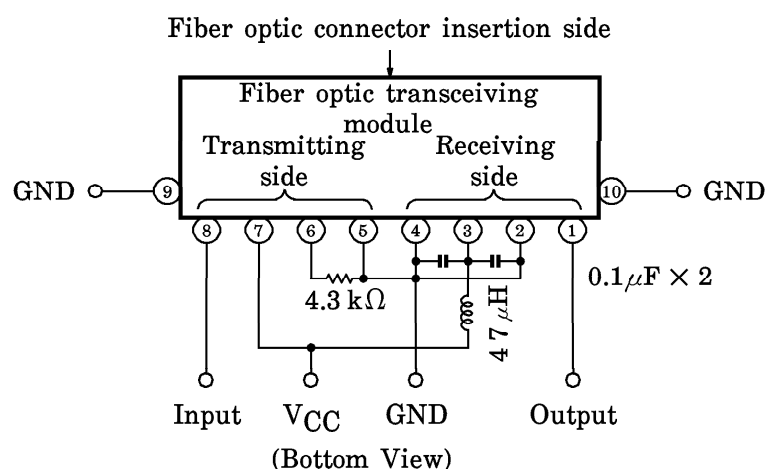

## 6. Applicable Optical Fiber with Fiber Optic Connectors

TOCP200-□□B, TOCP200P-□□B, TOCP200Q-□□B, TOCP200X-□□B

## 7. Precaution on Use

### (1) Maximum rating

The maximum ratings are the limit values which must not be exceeded during operation of device. None of these rating value must not be exceeded. If the maximum rating value is exceeded, the characteristics of devices may never be restored properly. In extreme cases, the device may be permanently damages.

### (2) Lifetime of light emitters

If an optical module is used for a long period of time, degeneration in the characteristics will mostly be due to a lowering of the fiber output power (Pf). This is caused by the degradation of the optical output of the LEDs used as the light source. The cause of degradation of the optical output of the LEDs may be defects in wafer crystallization or mold resin stress. The detailed causes are, however, not clear.

The lifetime of light emitters is greatly influenced by the operating conditions and the environment in which it is used as well as by the lifetime characteristics unique to the device type. Thus, when a light emitting device and its operating conditions determined, Toshiba recommend that lifetime characteristics be checked.

Depending on the environment conditions, Toshiba recommend that maintenance such as regular checks of the amount of optical output in accordance with the condition of operating environment.

(3) Soldering

Optical modules are comprised of internal semiconductor devices. However, in principle, optical modules are optical components. During soldering, ensure that flux does not contact with the emitting surface or the detecting surface. Also ensure that proper flux removal is conducted after soldering.

Some optical modules come with a protective cap. The protective cap is used to avoid malfunction when the optical module is not in use. Note that it is not dust or waterproof. As mentioned before, optical modules are optical components. Thus, in principle, soldering where there may be flux residue and flux removal after soldering is not recommended. Toshiba recommend that soldering be performed without the optical module mounted on the board. Then, after the board has been cleaned, the optical module should be soldered on to the board manually.

If the optical module cannot be soldered manually, use non-halogen (chlorine-free) flux and make sure, without cleaning, there is no residue such as chlorine. This is one of the ways to eliminate the effects of flux. In such a cases, be sure to check the devices' reliability.

(4) Noise resistance

It is believed that the use of optical transfer devices improve noise resistance. In theory, optical fiber is not affected by noise at all. However, receiving modules which handle signals whose level is extremely small, are susceptible to noise.

TOSLINK improve noise resistance to use a conductive case. However, the current signal output by the optical receiving modules' photodiode is extremely small. Thus, in some environments, shielding the case may not achieve sufficient noise resistance.

First systems which incorporate TOSLINK, Toshiba recommend testing using the actual device to check its noise resistance.

Use a simple noise filter on TOSLINK fiber optic transceiving module's power line. If the ripple in the power supply used is significant, reinforce the filter.

The optical module is to be used in an area which is susceptible to radiated noise, increase the shielding by covering the optical module and the power line filter with a metallic cover.

(5) Vibration and shock

This module is ceramic packaged which internal device is hollow so that the wire is not fixed to the device. This structure is not relatively sound against vibration and shock. Attention must be paid to the design of the mechanism for applications which are subject to large amounts of vibration.

(6) Fixing fiber optical transceiving module

Solder the fixed pin (pins 9 and 10) of fiber optic transceiving module TODX283 to the printed circuit board to fix the module to the board.

(7) Shielding and wiring pattern of fiber optic transceiving modules

To shield, connect the fixed pins (pins 9 and 10) of fiber optic transceiving module TODX283 to the GND.

Where the fiber optic transceiving module uses conductive resin, be careful that the case does not touch wiring (including land).

To improve noise resistance, shield the optical module and the power line filter using a metallic cover.

(8) Solvent

When using solvent for flux removal, do not use a high acid or high alkali solvent. Be careful not to pour solvent in to the optical connector ports. If solvent is inadvertently poured in to them, clean it off using cotton tips.

(9) Protective cap

When the TODX283 is not in use, attach the protective cap.

(10) Supply voltage

Use the supply voltage within the recommended operating condition ( $V_{CC} = 5 \pm 0.25 \text{ V}$ ). Make sure that supply voltage does not exceed the maximum rating value of 7 V, even for an instant.

(11) Input voltage

If a voltage exceeding the maximum rating value ( $V_{CC} + 0.5 \text{ V}$ ) is applied to the transmitter input, the internal IC may suffer damage. If there is a possibility that excessive voltage due to surges may be added to the input terminal, insert a protective circuit.

(12) Output


If the receiver output is at low and is connected to the power supply, or if the output is high and is connected to GND, the internal IC may be destroyed.

(13) Soldering condition

Solder at 260°C or less for no more than three seconds.

(14) Precaution at the printed wiring board design

For avoid the transmission trouble due to soldering, requested no set up the through-hole treatment at within the hatched area.

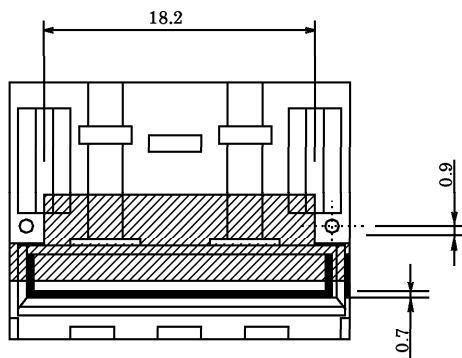

(15) Precautions when disposing of devices and packing materials.

When disposing devices and packing materials, follow the procedures stipulated by local regulations in order to protect the environment against contamination.

Compound semiconductors such as GaAs are used as LED materials in this module. When devices are disposed of, worker safety and protection of the environment must be taken into account.

(16) Precautions during use

Toshiba is continually working to improve the quality and the reliability of their products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and their vulnerability to physical stress. It is the responsibility of the buyer, when utilizing Toshiba products, to observe standards of safety, and to avoid situations in which the malfunction or failure of a Toshiba product could cause loss of human life, bodily injury or damage to property.

When developing equipment, please ensure that Toshiba products are used within the specified operating ranges set forth in the most recent product specifications. Also, please keep in mind the precautions and conditions set forth in the Toshiba Semiconductor Reliability Handbook.

**RESTRICTIONS ON PRODUCT USE**

000707EAC

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.