
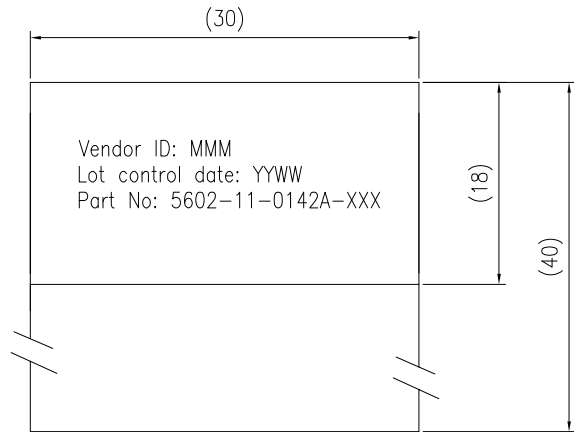


3M™ HIGH ROUTABILITY INTERNAL SATA CABLE ASSEMBLY

REVISION RECORD		
REV.	ECR/ECN/ECO NUMBER	DATE
A	ECO-0037492	05/09/11
B	ECO-0042030	13/07/12
C	ECO-0043801, CABLE P/N CHG	31/12/12
D	ECO-0047119, SHEET8 & 9 ADDED	09/04/13

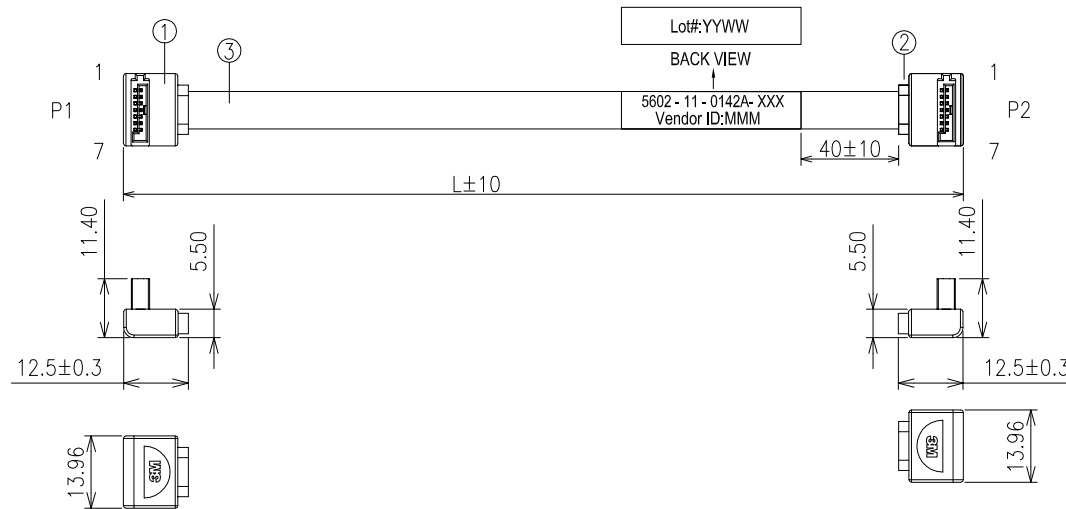

NOTES :

- Regulatory Information.
RoHs compliant, See the regulatory information appendix(RIA) in the "RoHs compliance" section of WWW.3Mconnectors.com compliance information (RIA E1 & C1 apply)
- For custom cable length, contact 3M sales rep.
- Cable part number : SL8803/04-10DN5-00
- Product Specification: PS-0117.
- This cable construction has a thin aluminum layer at each edge. User should evaluate its use in their application and, if necessary, insulating tape may be applied to cover the aluminum layer, as User deems appropriate
- PVC overmoulding and PE Inner moulding at both ends.
- Product meets SATA 3.0 signal integrity specifications.

PART NUMBER SELECTION

5602-11-0142A-XXX
Length in mm,000 refers to 1000mm.

3M PART NO.	L(MM)
5602-11-0142A-100	100
5602-11-0142A-200	200
5602-11-0142A-300	300
5602-11-0142A-400	400
5602-11-0142A-500	500
5602-11-0142A-600	600
5602-11-0142A-700	700
5602-11-0142A-800	800
5602-11-0142A-900	900
5602-11-0142A-000	1000

PIN OUT

P1	TYPE	TYPE	P2
1	G	G	1
2	A+	A+	2
3	A-	A-	3
4	G	G	4
5	B-	B-	5
6	B+	B+	6
7	G	G	7

3	CABLE : RIBBON TWIN AX , SL8803/04, UL AWM 21008,150V,80C	1	PC
	SIGNAL -SILVER PLATED COPPER WITH 30 AWG.		
2	SATA CONN : 7P FEMALE 90° BLACK PBT30% 15"AU	1	PC
1	SATA CONN : 7P FEMALE 90° BLACK PBT30% 15"AU	1	PC
ITEM	SPECIFICATION	Q'TY	UNIT


UNIT: MM	DFTG RAD VITTAPALLI	DATE 07/02/16	3M APAC INNOVATION CENTRE		DIVISION ESD	STATUS RELEASE	
GEN. TOLERANCES	CHKD RAD VITTAPALLI	DATE 07/02/16			MODEL _____		
LINEAR .0 = ± 0.25 .00 = ± 0.15 .000 = ± 0.05	APPLV SAUJIT BANDHU	DATE 07/02/16	TITLE SATA 7 PIN RIBBON TWINAX CABLE ASSEMBLY RIGHT ANGLE TO RIGHT ANGLE W/O LATCH				
ANGLE ±1°	THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO 3M COMPANY. NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT, IN WHOLE OR IN PART, SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M. © 3M 2016. ALL RIGHTS RESERVED.						
PROJECTION 	INTERPRET PER ASME Y14.5M-1994		SIZE A3	DRAWING NO.	78-5100-4897-8		REV D
	CRITICAL DIMENSION: ▲		SCALE : NTS		DET LIST	☐ YES ☐ NO	SHT 1 of 9

3M™ HIGH ROUTABILITY INTERNAL SATA CABLE ASSEMBLY

REVISION RECORD

REV. ECR/ECN/ECO NUMBER DATE

REFER TO SHT 1 OF 9

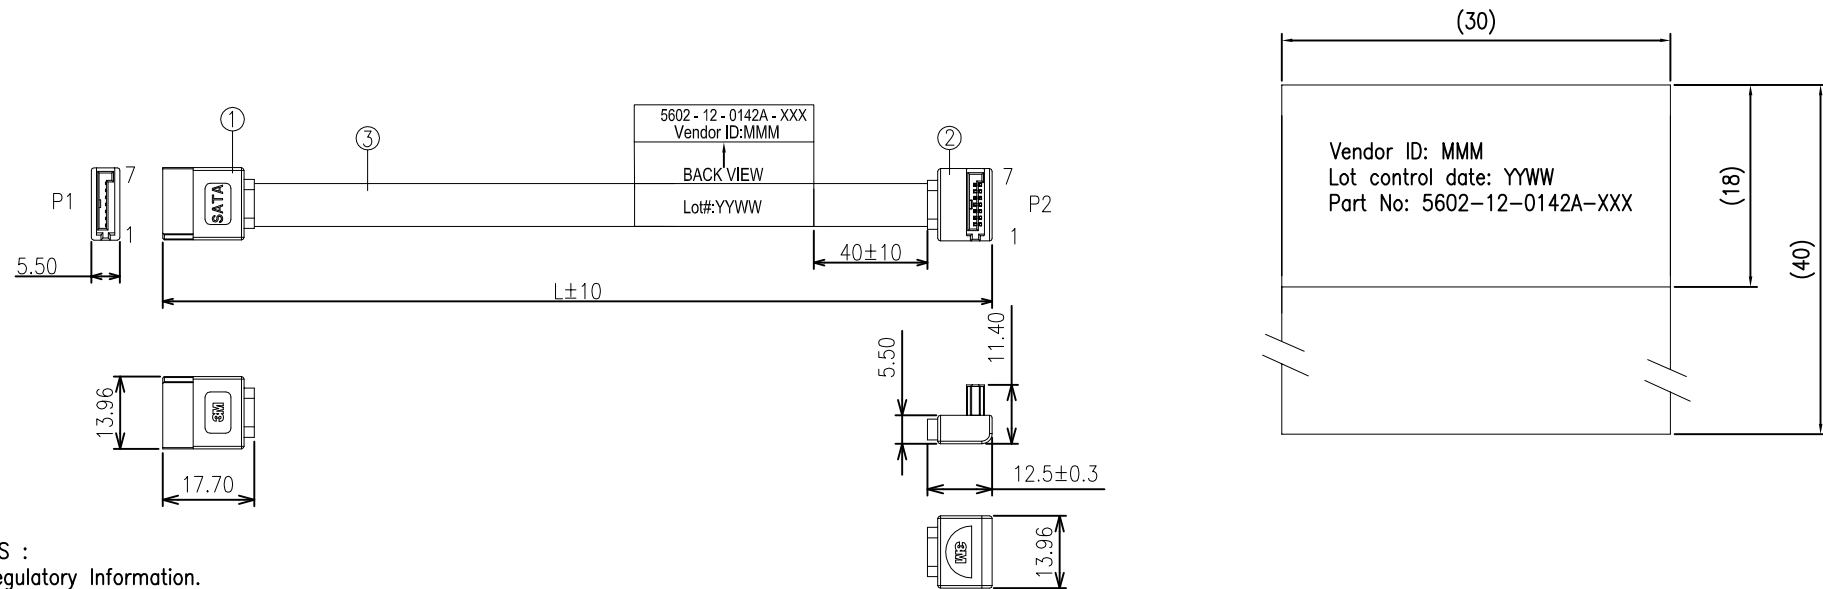

NOTES :

1. Regulatory Information.

RoHs compliant, See the regulatory information appendix(RIA) in the "RoHs compliance" section of WWW.3Mconnectors.com compliance information (RIA E1 & C1 apply)

2. For custom cable length, contact 3M sales rep.

3. Cable Part number: SL8803/04-10DN5-00

4. Product Specification: PS-0117.

5. This cable construction has a thin aluminum layer at each edge. User should evaluate its use in their application and, if necessary, insulating tape may be applied to cover the aluminum layer, as User deems appropriate

6. PVC overmoulding and PE Inner moulding at both ends.

7. Product meets SATA 3.0 signal integrity specifications.

PART NUMBER SELECTION

5602-12-0142A-XXX

Length in mm,000 refers to 1000mm.

3M PART NO.	L(MM)
5602-12-0142A-100	100
5602-12-0142A-200	200
5602-12-0142A-300	300
5602-12-0142A-400	400
5602-12-0142A-500	500
5602-12-0142A-600	600
5602-12-0142A-700	700
5602-12-0142A-800	800
5602-12-0142A-900	900
5602-12-0142A-000	1000

PIN OUT

P1	TYPE	TYPE	P2
1	G	G	1
2	A+	A+	2
3	A-	A-	3
4	G	G	4
5	B-	B-	5
6	B+	B+	6
7	G	G	7



3	CABLE : RIBBON TWIN AX , SL8803/04, UL AWM 21008,150V,80C	1	PC
	SIGNAL -SILVER PLATED COPPER CONDUCTOR 30 AWG.		
2	SATA CONN : 7P FEMALE 90° BLACK PBT 30%GF 15*AU	1	PC
1	SATA CONN : 7P FEMALE 180° BLACK PBT 30%GF 15*AU	1	PC
ITEM	SPECIFICATION	Q'TY	UNIT

UNIT: MM	DFTG RAD VITTAPALLI	DATE 07/02/16	3M APAC INNOVATION CENTRE		DIVISION ESD	STATUS RELEASE
GEN. TOLERANCES	CHKD RAD VITTAPALLI	DATE 07/02/16			MODEL _____	
LINEAR .0 = ± 0.25 .00 = ± 0.15 .000 = ± 0.05	APPLV SAUJIT BANDHU	DATE 07/02/16	TITLE SATA 7 PIN RIBBON TWINAX CABLE ASSEMBLY STRAIGHT TO RIGHT ANGLE W/O LATCH			
ANGLE ±1°	THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO 3M COMPANY. NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT, IN WHOLE OR IN PART, SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M. © 3M 2016. ALL RIGHTS RESERVED.					
PROJECTION 	INTERPRET PER ASME Y14.5M-1994		SIZE A3	DRAWING NO. 78-5100-4897-8		REV D
	CRITICAL DIMENSION: ▲		SCALE : NTS		DET LIST ☐ YES ☐ NO	SHT 2 of 9

3M™ HIGH ROUTABILITY INTERNAL SATA CABLE ASSEMBLY

REVISION RECORD

REV.	ECR/ECN/ECO NUMBER	DATE
REFER TO SHT 1 OF 9		

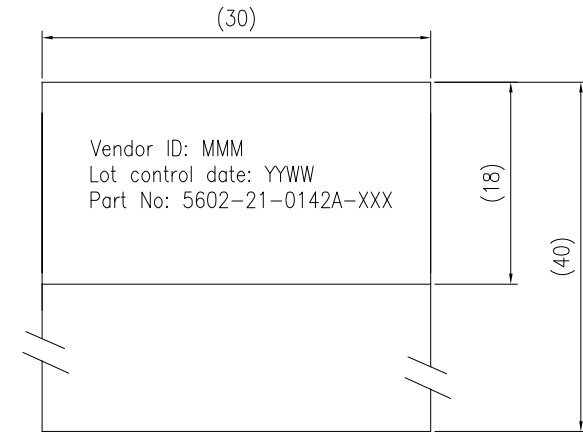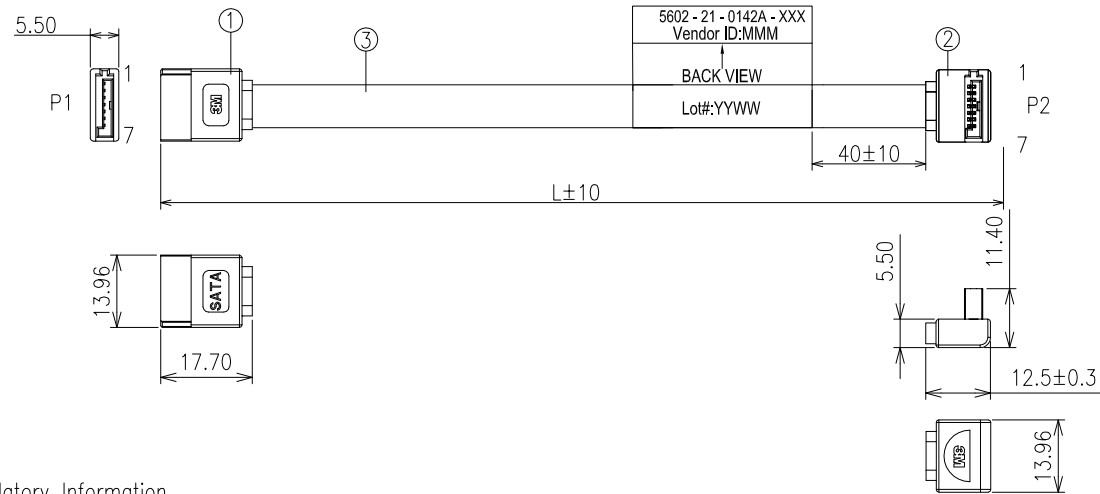

NOTES :

- Regulatory Information.
RoHs compliant, See the regulatory information appendix(RIA) in the "RoHs compliance" section of WWW.3Mconnectors.com compliance information (RIA E1 & C1 apply)
- For custom cable length, contact 3M sales rep.
- Cable Part number : SL8803/04-10DN5-00
- Product Specification: PS-0117.
- This cable construction has a thin aluminum layer at each edge.
User should evaluate its use in their application and, if necessary, insulating tape may be applied to cover the aluminum layer, as User deems appropriate
- PVC overmoulding and PE Inner moulding at both ends.
- Product meets SATA 3.0 signal integrity specifications.

PART NUMBER SELECTION

5602-21-0142A-XXX
Length in mm,000 refers to 1000mm.

3M PART NO.	L(MM)
5602-21-0142A-100	100
5602-21-0142A-200	200
5602-21-0142A-300	300
5602-21-0142A-400	400
5602-21-0142A-500	500
5602-21-0142A-600	600
5602-21-0142A-700	700
5602-21-0142A-800	800
5602-21-0142A-900	900
5602-21-0142A-000	1000

PIN OUT

P1	TYPE	TYPE	P2
1	G	G	1
2	A+	A+	2
3	A-	A-	3
4	G	G	4
5	B-	B-	5
6	B+	B+	6
7	G	G	7


3	CABLE : RIBBON TWIN AX , SL8803/04, UL AWM 21008,150V,80C	1	PC
	SIGNAL -SILVER PLATED COPPER CONDUCTOR 30 AWG.		
2	SATA CONN : 7P FEMALE 90° BLACK PBT 30%GF 15"AU	1	PC
1	SATA CONN : 7P FEMALE 180° BLACK PBT 30%GF 15"AU	1	PC
ITEM	SPECIFICATION	Q'TY	UNIT

UNIT: MM	DFTG RAD VITTAPALLI	DATE 07/02/16	3M APAC INNOVATION CENTRE		DIVISION ESD	STATUS RELEASE	
GEN. TOLERANCES	CHKD RAD VITTAPALLI	DATE 07/02/16			MODEL _____		
LINEAR .0 = ± 0.25 .00 = ± 0.15 .000 = ± 0.05	APPLV SAUJIT BANDHU	DATE 07/02/16	TITLE SATA 7 PIN RIBBON TWINAX CABLE ASSEMBLY STRAIGHT TO RIGHT ANGLE W/O LATCH				
ANGLE ±1°	THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO 3M COMPANY. NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT, IN WHOLE OR IN PART, SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M. © 3M 2016. ALL RIGHTS RESERVED.						
PROJECTION 			INTERPRET PER ASME Y14.5M-1994	SIZE A3	DRAWING NO. 78-5100-4897-8	REV D	
	CRITICAL DIMENSION: ▲		SCALE : NTS		DET LIST ☐ YES ☐ NO	SHT 3 of 9	

3M™ HIGH ROUTABILITY INTERNAL SATA CABLE ASSEMBLY

REVISION RECORD

REV.	ECR/ECN/ECO NUMBER	DATE
REFER TO SHT 1 OF 9		

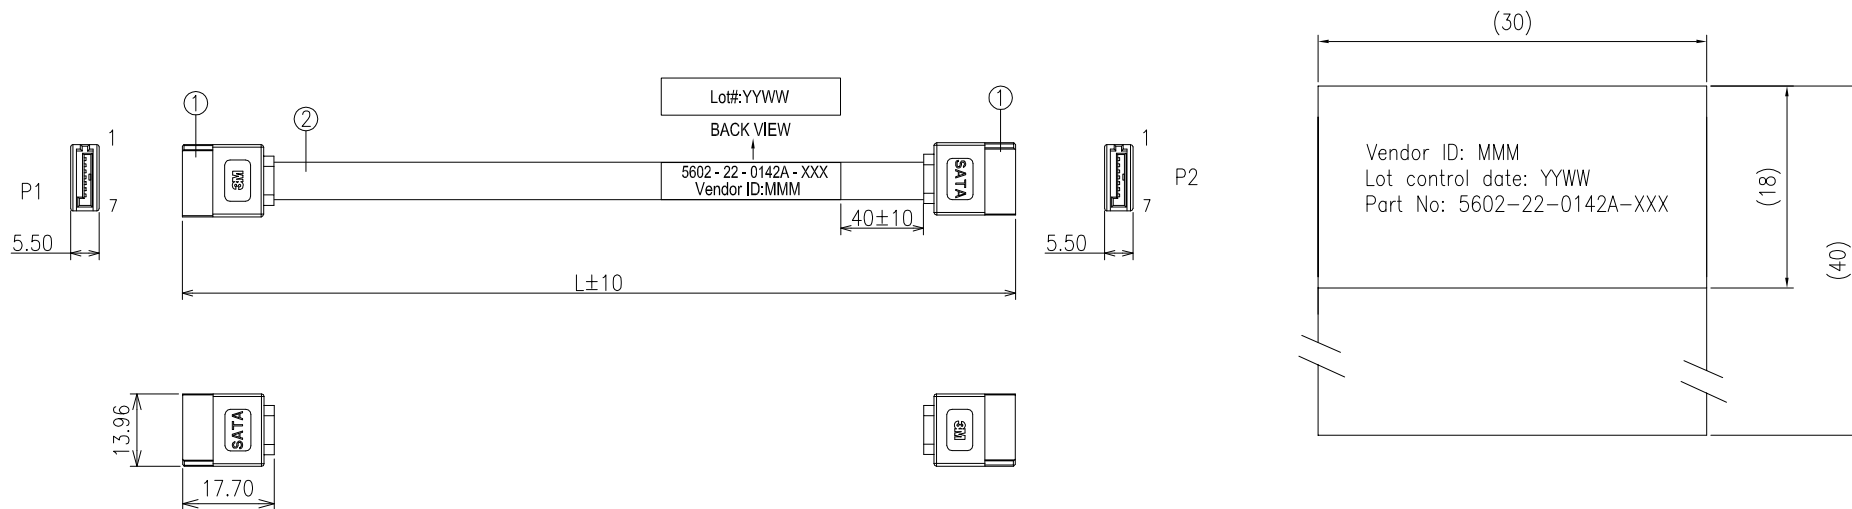

NOTES :

1. Regulatory Information.

RoHs compliant, See the regulatory information appendix(RIA) in the "RoHs compliance" section of WWW.3Mconnectors.com compliance information (RIA E1 & C1 apply)

2. For custom cable length, contact 3M sales rep.

3. Cable Part number: SL8803/04-10DN5-00

4. Product Specification: PS-0117.

5. This cable construction has a thin aluminum layer at each edge. User should evaluate its use in their application and, if necessary, insulating tape may be applied to cover the aluminum layer, as User deems appropriate

6. PVC overmoulding and PE Inner moulding at both ends.

7. Product meets SATA 3.0 signal integrity specifications.

PART NUMBER SELECTION

5602-22-0142A-XXX

Length in mm,000 refers to 1000mm.

PIN OUT

3M PART NO.	L(MM)
5602-22-0142A-100	100
5602-22-0142A-200	200
5602-22-0142A-300	300
5602-22-0142A-400	400
5602-22-0142A-500	500
5602-22-0142A-600	600
5602-22-0142A-700	700
5602-22-0142A-800	800
5602-22-0142A-900	900
5602-22-0142A-000	1000



P1	TYPE	TYPE	P2
1	G	G	1
2	A+	A+	2
3	A-	A-	3
4	G	G	4
5	B-	B-	5
6	B+	B+	6
7	G	G	7

2	CABLE : RIBBON TWIN AX , SL8803/04, UL AWM 21008,150V,80C	1	PC
	SIGNAL -SILVER PLATED COPPER CONDUCTOR WITH 30 AWG.		
1	SATA CONN : 7P FEMALE 180° BLACK PBT 30GF , 15"AU	2	PCS
ITEM	SPECIFICATION	Q'TY	UNIT

UNIT: MM	DFTG RAD VITTAPALLI	DATE 07/02/16			DIVISION ESD	STATUS RELEASE
GEN. TOLERANCES	CHKD RAD VITTAPALLI	DATE 07/02/16			MODEL	
LINEAR .0 = ± 0.25 .00 = ± 0.15 .000 = ± 0.05	APPLV SAUJIT BANDHU	DATE 07/02/16	TITLE SATA 7 PIN RIBBON TWINAX CABLE ASSEMBLY STRAIGHT TO STRAIGHT W/O LATCH			
ANGLE ±1°	THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO 3M COMPANY. NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT, IN WHOLE OR IN PART, SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M. © 3M 2016. ALL RIGHTS RESERVED.		SIZE A3	DRAWING NO. 78-5100-4897-8	REV D	
PROJECTION 	INTERPRET PER ASME Y14.5M-1994					
	CRITICAL DIMENSION: ▲		SCALE : NTS		DET LIST ☐ YES ☐ NO	SHT 4 of 9

3M™ HIGH ROUTABILITY INTERNAL SATA CABLE ASSEMBLY

REVISION RECORD		
REV.	ECR/ECN/ECO NUMBER	DATE
REFER TO SHT 1 OF 9		

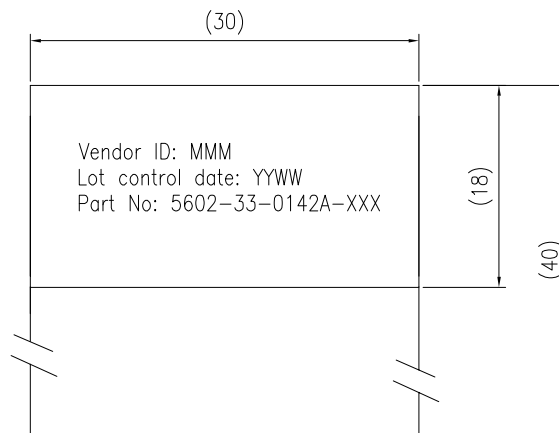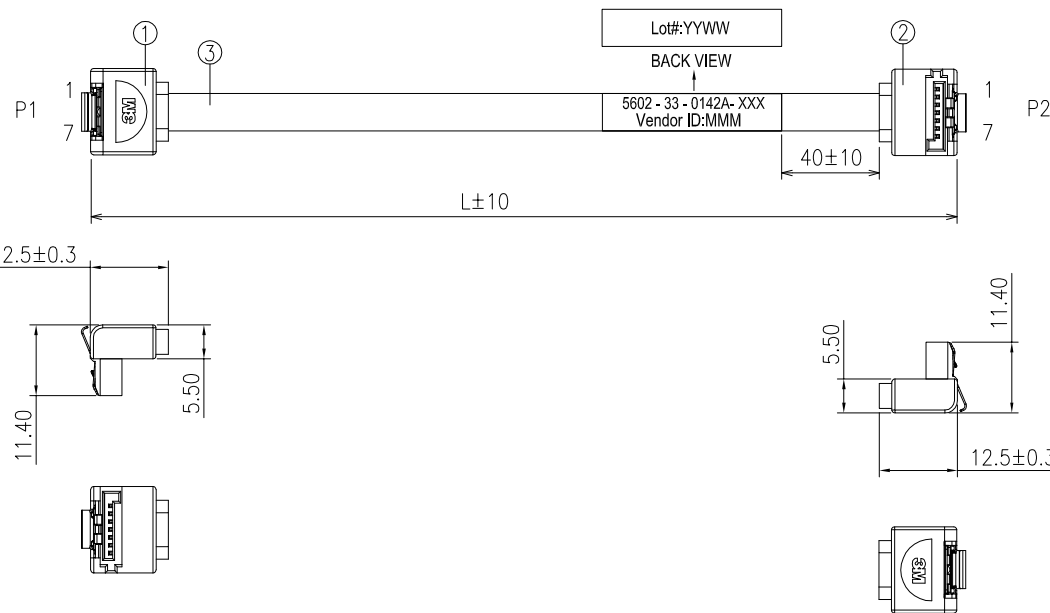

NOTES :

- Regulatory Information.
RoHs compliant, See the regulatory information appendix(RIA) in the "RoHs compliance" section of WWW.3Mconnectors.com compliance information (RIA E1 & C1 apply)
- For custom cable length, contact 3M sales rep.
- Cable part number: SL8803/04-10DN5-00
- Product Specification: PS-0117.
- This cable construction has a thin aluminum layer at each edge. User should evaluate its use in their application and, if necessary, insulating tape may be applied to cover the aluminum layer, as User deems appropriate
- PVC overmoulding and PE Inner moulding at both ends.
- Product meets SATA 3.0 signal integrity specifications.

PART NUMBER SELECTION

5602-33-0142A-XXX
Length in mm,000 refers to 1000mm.

3M PART NO.	L(MM)
5602-33-0142A-100	100
5602-33-0142A-200	200
5602-33-0142A-300	300
5602-33-0142A-400	400
5602-33-0142A-500	500
5602-33-0142A-600	600
5602-33-0142A-700	700
5602-33-0142A-800	800
5602-33-0142A-900	900
5602-33-0142A-000	1000

PIN OUT

P1	TYPE	TYPE	P2
1	G	G	1
2	A+	A+	2
3	A-	A-	3
4	G	G	4
5	B-	B-	5
6	B+	B+	6
7	G	G	7



3	CABLE : RIBBON TWIN AX , SL8803/04, UL AWM 21008,150V,80C	1	PC
	SIGNAL -SILVER PLATED COPPER WITH 30 AWG.		
2	SATA CONN : 7P FEMALE 90° BLACK PBT30% 15"AU WITH LATCH	1	PC
1	SATA CONN : 7P FEMALE 90° BLACK PBT30% 15"AU WITH LATCH	1	PC
ITEM	SPECIFICATION	Q'TY	UNIT

WWW.3Mconnectors.com

UNIT: MM	DFTG RAD VITTAPALLI	DATE 07/02/16	3M APAC INNOVATION CENTRE		DIVISION ESD		STATUS RELEASE
GEN. TOLERANCES	CHKD RAD VITTAPALLI	DATE 07/02/16			MODEL _____		
LINEAR .0 = ± 0.25 .00 = ± 0.15 .000= ± 0.05	APPVL SAUJIT BANDHU	DATE 07/02/16	TITLE SATA 7 PIN RIBBON TWINAX CABLE ASSEMBLY RIGHT ANGLE TO RIGHT ANGLE WITH LATCH				
ANGLE ±1°	THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO 3M COMPANY. NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT, IN WHOLE OR IN PART, SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M. © 3M 2016. ALL RIGHTS RESERVED.		SIZE A3	DRAWING NO. 78-5100-4897-8	REV D		
PROJECTION 	INTERPRET PER ASME Y14.5M-1994						
	CRITICAL DIMENSION: ▲		SCALE : NTS		DET LIST ☐ YES ☐ NO	SHT 5 of 9	

3M™ HIGH ROUTABILITY INTERNAL SATA CABLE ASSEMBLY

REVISION RECORD		
REV.	ECR/ECN/ECO NUMBER	DATE
REFER TO SHT 1 OF 9		

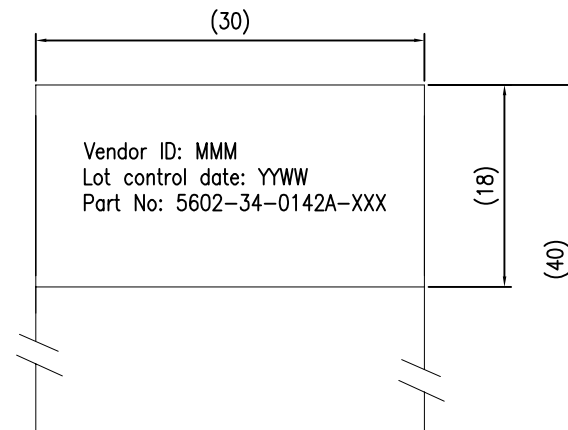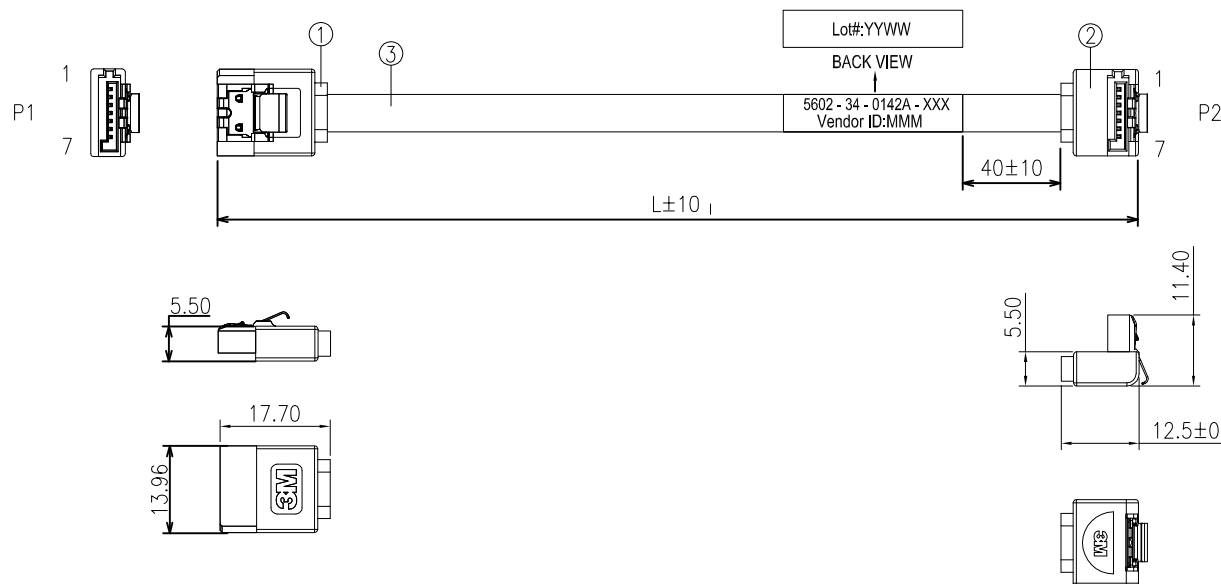

Vendor ID: MMM
Lot control date: YYWW
Part No: 5602-34-0142A-XXX

NOTES :

- Regulatory Information.
RoHs compliant, See the regulatory information appendix(RIA) in the "RoHs compliance" section of WWW.3Mconnectors.com compliance information (RIA E1 & C1 apply)
- For custom cable length, contact 3M sales rep.
- Cable Part number: SL8803/04-10DN5-00
- Product Specification: PS-0117.
- This cable construction has a thin aluminum layer at each edge.
User should evaluate its use in their application and, if necessary, insulating tape may be applied to cover the aluminum layer, as User deems appropriate
- PVC overmoulding and PE Inner moulding at both ends.
- Product meets SATA 3.0 signal integrity specifications.

PART NUMBER SELECTION

5602-34-0142A-XXX
Length in mm,000 refers to 1000mm.

3M PART NO.	L(MM)
5602-34-0142A-100	100
5602-34-0142A-200	200
5602-34-0142A-300	300
5602-34-0142A-400	400
5602-34-0142A-500	500
5602-34-0142A-600	600
5602-34-0142A-700	700
5602-34-0142A-800	800
5602-34-0142A-900	900
5602-34-0142A-000	1000

PIN OUT

P1	TYPE	TYPE	P2
1	G	G	1
2	A+	A+	2
3	A-	A-	3
4	G	G	4
5	B-	B-	5
6	B+	B+	6
7	G	G	7





3	CABLE : RIBBON TWIN AX , SL8803/04, UL AWM 21008,150V,80C	1	PC
	SIGNAL -SILVER PLATED COPPER CONDUCTOR 30 AWG.		
2	SATA CONN : 7P FEMALE 90° BLACK PBT 30%GF 15*AU WITH LATCH	1	PC
1	SATA CONN : 7P FEMALE 180° BLACK PBT 30%GF 15*AU WITH LATCH	1	PC
ITEM	SPECIFICATION	Q'TY	UNIT

WWW.3Mconnectors.com

UNIT: MM	DFTG RAD VITTAPALLI	DATE 07/02/16		DIVISION ESD	STATUS RELEASE
GEN. TOLERANCES	CHKD RAD VITTAPALLI	DATE 07/02/16		MODEL _____	
LINEAR .0 = ± 0.25 .00 = ± 0.15 .000 = ± 0.05	APPLV SAUJIT BANDHU	DATE 07/02/16	TITLE SATA 7 PIN RIBBON TWINAX CABLE ASSEMBLY STRAIGHT TO RIGHT ANGLE WITH LATCH		
ANGLE ±1°	THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO 3M COMPANY. NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT, IN WHOLE OR IN PART, SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M. © 3M 2016. ALL RIGHTS RESERVED.		SIZE A3	DRAWING NO. 78-5100-4897-8	REV D
PROJECTION 	INTERPRET PER ASME Y14.5M-1994				
	CRITICAL DIMENSION: ▲		SCALE : NTS		DET LIST ☐ YES ☐ NO SHT 6 of 9

3M™ HIGH ROUTABILITY INTERNAL SATA CABLE ASSEMBLY

REVISION RECORD		
REV.	ECR/ECN/ECO NUMBER	DATE
REFER TO SHT 1 OF 9		

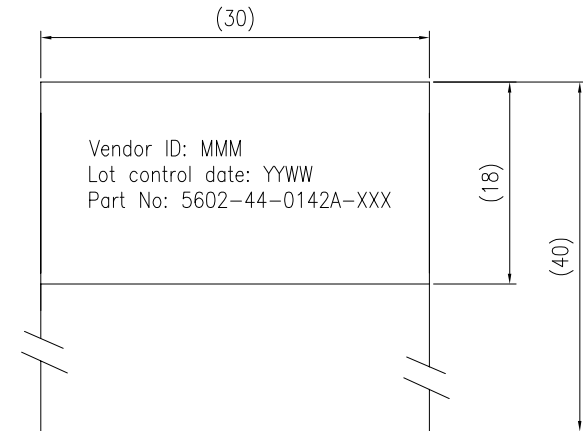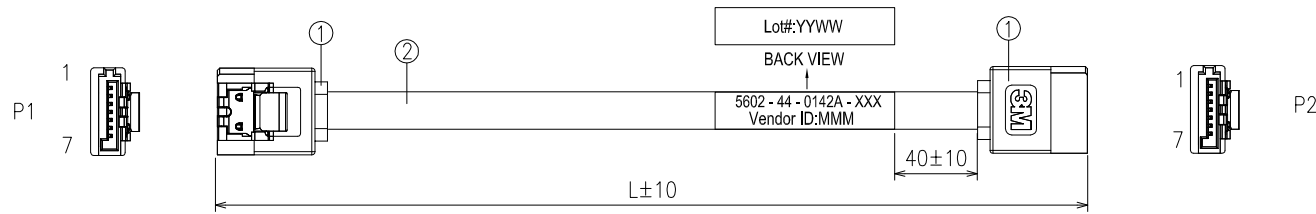

NOTES :

- Regulatory Information.
RoHs compliant, See the regulatory information appendix(RIA) in the "RoHs compliance" section of WWW.3Mconnectors.com compliance information (RIA E1 & C1 apply)
- For custom cable length, contact 3M sales rep.
- Cable Part number: SL8803/04-10DN5-00
- Product Specification: PS-0117.
- This cable construction has a thin aluminum layer at each edge.
User should evaluate its use in their application and, if necessary, insulating tape may be applied to cover the aluminum layer, as User deems appropriate
- PVC overmoulding and PE Inner moulding at both ends.
- Product meets SATA 3.0 signal integrity specifications.

PART NUMBER SELECTION

5602-44-0142A-XXX
Length in mm,000 refers to 1000mm.

3M PART NO.	L(MM)
5602-44-0142A-100	100
5602-44-0142A-200	200
5602-44-0142A-300	300
5602-44-0142A-400	400
5602-44-0142A-500	500
5602-44-0142A-600	600
5602-44-0142A-700	700
5602-44-0142A-800	800
5602-44-0142A-900	900
5602-44-0142A-000	1000

PIN OUT

P1	TYPE	TYPE	P2
1	G	G	1
2	A+	A+	2
3	A-	A-	3
4	G	G	4
5	B-	B-	5
6	B+	B+	6
7	G	G	7



2	CABLE : RIBBON TWIN AX , SL8803/04, UL AWM 21008,150V,80C	1	PC
	SIGNAL -SILVER PLATED COPPER CONDUCTOR WITH 30 AWG.		
1	SATA CONN : 7P FEMALE 180° BLACK PBT 30GF , 15°AU WITH LATCH	2	PCS
ITEM	SPECIFICATION	Q'TY	UNIT

WWW.3Mconnectors.com

UNIT: MM	DFTG RAD VITTAPALLI	DATE 07/02/16	3M APAC INNOVATION CENTRE		DIVISION ESD	STATUS RELEASE	
GEN. TOLERANCES	CHKD RAD VITTAPALLI	DATE 07/02/16			MODEL		RELEASE
LINEAR .0 = ± 0.25 .00 = ± 0.15 .000 = ± 0.05	APPVL SAUJIT BANDHU	DATE 07/02/16	TITLE SATA 7 PIN RIBBON TWINAX CABLE ASSEMBLY STRAIGHT TO STRAIGHT WITH LATCH				
THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO 3M COMPANY. NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT, IN WHOLE OR IN PART, SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M. © 3M 2016. ALL RIGHTS RESERVED.							
ANGLE ±1°	OR IN PART, SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M. © 3M 2016. ALL RIGHTS RESERVED.		SIZE A3	DRAWING NO. 78-5100-4897-8			REV D
PROJECTION 							
	CRITICAL DIMENSION: ▲		SCALE : NTS		DET LIST ☐ YES ☐ NO	SHT 7 of 9	

3M™ HIGH ROUTABILITY INTERNAL SATA CABLE ASSEMBLY

REVISION RECORD		
REV.	ECR/ECN/ECO NUMBER	DATE
REFER TO SHT 1 OF 9		

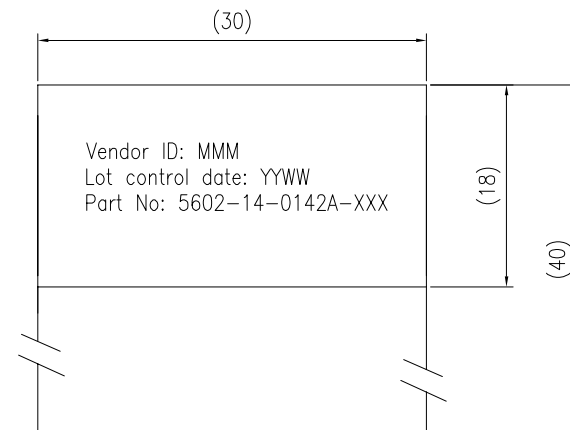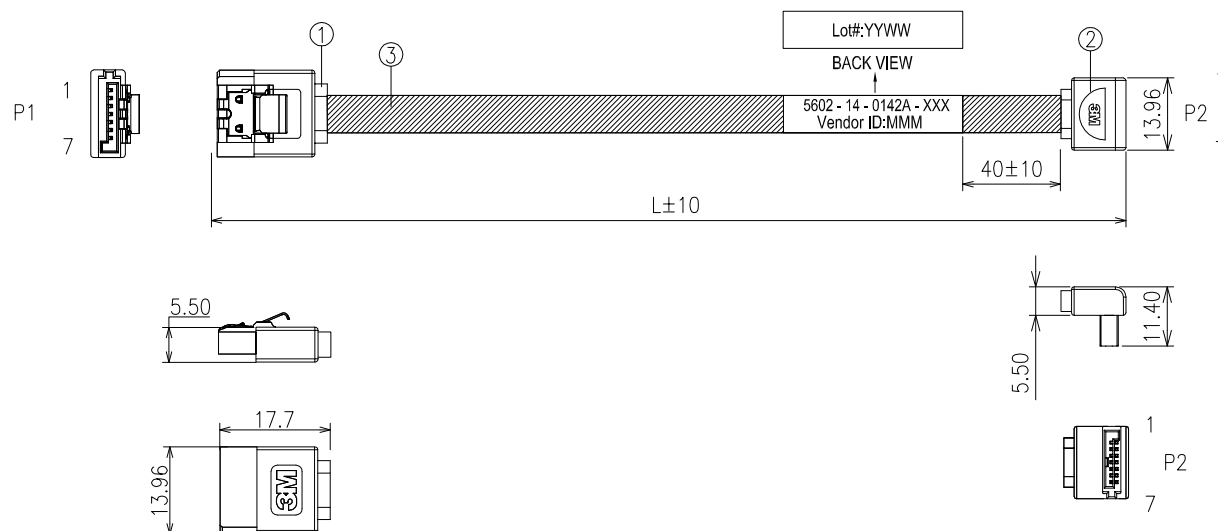

NOTES :

- Regulatory Information.
RoHs compliant, See the regulatory information appendix(RIA) in the "RoHs compliance" section of WWW.3Mconnectors.com compliance information (RIA E1 & C1 apply)
- For custom cable length, contact 3M sales rep.
- Cable part number : SL8803/04-10DN5-00.
- Product Specification: PS-0117.
- Unless otherwise noted, references to industry specifications are intended to indicate substantial compliance to the material elements of the specification. Such references should not be construed as a guarantee of compliance to all requirements in a given specification.
- PVC overmoulding and PE Inner moulding at both ends.
- Product meets SATA 3.0 signal integrity specifications.

PART NUMBER SELECTION

5602-14-0142A-XXX
Length in mm,000 refers to 1000mm.

3M PART NO.	L(MM)
5602-14-0142A-100	100
5602-14-0142A-200	200
5602-14-0142A-300	300
5602-14-0142A-400	400
5602-14-0142A-500	500
5602-14-0142A-600	600
5602-14-0142A-700	700
5602-14-0142A-800	800
5602-14-0142A-900	900
5602-14-0142A-000	1000

PIN OUT


P1	TYPE	TYPE	P2
1	G	G	1
2	A+	A+	2
3	A-	A-	3
4	G	G	4
5	B-	B-	5
6	B+	B+	6
7	G	G	7

3	CABLE : RIBBON TWIN AX , SL8803/04, UL AWM 21008,150V,80C SIGNAL -SILVER PLATED COPPER WITH 30 AWG.	1	PC
2	SATA CONN :7P RA SOCKET BLACK PBT 30GF, 15"AU WITHOUT LATCH	1	PC
1	SATA CONN :7P ST SOCKET BLACK PBT 30GF, 15"AU WITH LATCH	1	PC
ITEM	SPECIFICATION	Q'TY	UNIT

WWW.3Mconnectors.com

UNIT: MM	DFTG RAD VITTAPALLI	DATE 07/02/16		DIVISION ESD	STATUS RELEASED
GEN. TOLERANCES	CHKD RAD VITTAPALLI	DATE 07/02/16		MODEL	
LINEAR .0 = ± 0.25 .00 = ± 0.15 .000 = ± 0.05	APPVL SAUJIT BANDHU	DATE 07/02/16	TITLE SATA 7 PIN RIBBON TWINAX CABLE ASSEMBLY STRAIGHT WITH LATCH TO RIGHT ANGLE WITHOUT LATCH		
ANGLE ±1°	THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO 3M COMPANY. NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT, IN WHOLE OR IN PART, SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M. © 3M 2016. ALL RIGHTS RESERVED.				
PROJECTION 	INTERPRET PER ASME Y14.5M-1994		SIZE A3	DRAWING NO. 78-5100-4897-8	REV 5
	CRITICAL DIMENSION: ▲		SCALE : NTS		DET LIST ☐ YES ☐ NO
			SHT 8 of 9		

REVISION RECORD		
REV.	ECR/ECN/ECO NUMBER	DATE
_____ REFER TO SHT 1 OF 9 _____		

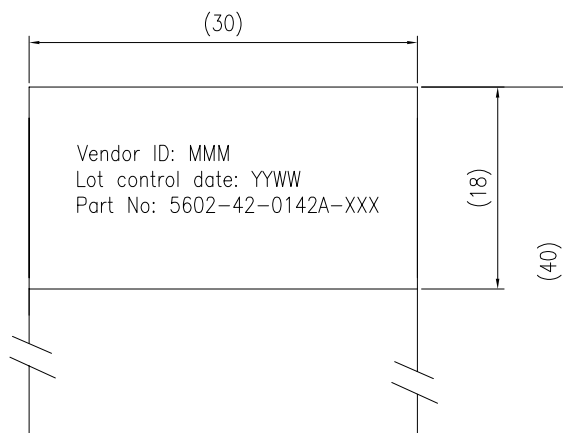

1. Regulatory Information.
RoHS compliant, See the regulatory information appendix(RIA) in the "RoHS compliance" section of WWW.3Mconnectors.com compliance information (RIA E1 & C1 apply)
2. For custom cable length, contact 3M sales rep.
3. Cable part number : SL8803/04-10DN5-00.
4. Product Specification: PS-0117.
5. Unless otherwise noted, references to industry specifications are intended to indicate substantial compliance to the material elements of the specification. Such references should not be construed as a guarantee of compliance to all requirements in a given specification.
6. PVC overmoulding and PE Inner moulding at both ends.
7. Product meets SATA 3.0 signal integrity specifications.

5602-42-0142A-XXX
└─Length in mm,000 refers to 1000mm.

3M PART NO.	L(MM)
5602-42-0142A-100	100
5602-42-0142A-200	200
5602-42-0142A-300	300
5602-42-0142A-400	400
5602-42-0142A-500	500
5602-42-0142A-600	600
5602-42-0142A-700	700
5602-42-0142A-800	800
5602-42-0142A-900	900
5602-42-0142A-000	1000

P1	TYPE	TYPE	P2
1	G	G	
2	A+	A+	2
3	A-	A-	3
4	G	G	4
	G	G	
5	B-	B-	5
6	B+	B+	6
7	G	G	7

3	CABLE : RIBBON TWIN AX , SL8803/04, UL AWM 21008,150V,80C SIGNAL –SILVER PLATED COPPER WITH 30 AWG.	1	PC
2	SATA CONN :7P ST SOCKET BLACK PBT 30GF, 15"AU WITHOUT LATCH	1	PC
1	SATA CONN :7P ST SOCKET BLACK PBT 30GF, 15"AU WITH LATCH	1	PC
ITEM	SPECIFICATION	Q'TY	UNIT

WWW.3Mconnectors.com

UNIT: MM	DFTG RAD VITTAPALLI	DATE 07/02/16			DIVISION	ESD	STATUS RELEASED
GEN. TOLERANCES	CHKD RAD VITTAPALLI	DATE 07/02/16			MODEL	_____	
LINEAR .0 = ± 0.25 .00 = ± 0.15 .000 = ± 0.05	APPLV SAUJIT BANDHU	DATE 07/02/16	TITLE SATA 7 PIN RIBBON TWINAX CABLE ASSEMBLY STRAIGHT LATCH TO STRAIGHT WITHOUT LATCH				
ANGLE ±1°	THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO 3M COMPANY. NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT, IN WHOLE OR IN PART, SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M. © 3M 2016. ALL RIGHTS RESERVED.		SIZE A3	DRAWING NO. 78-5100-4897-8			REV D
PROJECTION 	INTERPRET PER ASME Y14.5M-1994						
	CRITICAL DIMENSION: ▲		SCALE : NTS		DET LIST	☐ YES ☐ NO	SHT 9 of 9

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[3M:](#)

[5602-22-0031-102](#) [5602-34-0048-203](#) [5602-34-0048-254](#) [5602-34-0048-304](#) [5602-34-0048-508](#) [5602-1101](#) [5602-1102](#) [5602-2101](#) [5602-2102](#) [5602-2201](#) [5602-2202](#) [5602-11-0142A-000](#) [5602-11-0142A-500](#) [5602-11-0142A-600](#) [5602-11-0142A-700](#) [5602-11-0142A-800](#) [5602-11-0142A-900](#) [5602-12-0142A-000](#) [5602-12-0142A-500](#) [5602-12-0142A-600](#) [5602-12-0142A-700](#) [5602-12-0142A-800](#) [5602-12-0142A-900](#) [5602-22-0142A-000](#) [5602-22-0142A-500](#) [5602-22-0142A-600](#) [5602-22-0142A-700](#) [5602-22-0142A-800](#) [5602-22-0142A-900](#) [5602-44-0142A-700](#) [5602-44-0142A-600](#) [5602-44-0142A-500](#) [5602-44-0142A-900](#) [5602-44-0142A-000](#) [5602-44-0142A-800](#) [5602-44-0142A-100](#) [5602-44-0142A-200](#) [5602-44-0142A-300](#) [5602-22-0142A-200](#)