

TOSHIBA MOS MEMORY PRODUCTS

1,048,576 WORD X 1 BIT DYNAMIC RAM
SILICON GATE CMOS

TC511001P/J/Z-85, TC511001P/J/Z-10
TC511001P/J/Z-12

DESCRIPTION

The TC511001P/J/Z is the new generation dynamic RAM organized 1,048,576 words by 1 bit. The TC511001P/J/Z utilizes TOSHIBA's CMOS Silicon gate process technology as well as advanced circuit techniques to provide wide operating margins, both internally and to the system user. Multiplexed address inputs permit the TC511001P/J/Z to be packaged in a standard 18 pin plastic DIP, 26/20 pin plastic SOJ and 20/19 pin plastic ZIP. The package size provides high system bit densities


FEATURES

- 1,048,576 word by 1 bit organization
- Fast access time and cycle time

		TC511001P/J/Z-85-10-12		
t _{TRAC}	RAS Access Time	85ns	100ns	120ns
t _{AA}	Column Address Access Time	45ns	50ns	60ns
t _{CAC}	CAS Access Time	30ns	35ns	40ns
t _{RC}	Cycle Time	165ns	190ns	220ns
t _{TNCAC}	Nibble Mode Access Time	20ns	20ns	25ns
t _{TNC}	Nibble Mode Cycle Time	40ns	40ns	50ns

- Single power supply of 5V ± 10% with a built-in V_{BB} generator

PIN CONNECTION (TOP VIEW)

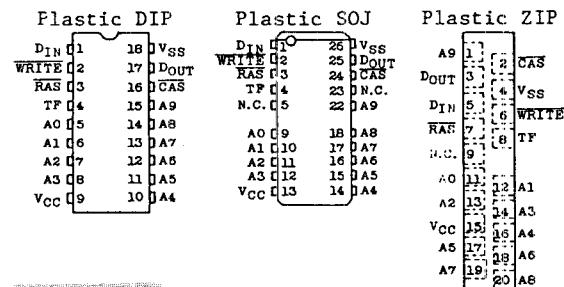


PIN NAMES

A0 ~ A9	Address Inputs
CAS	Column Address Strobe
D _{IN}	Data In
D _{OUT}	Data Out
RAS	Row Address Strobe
WRITE	Read/Write Input
V _{CC}	Power (+5V)
V _{SS}	Ground
TF	Test Function
N.C.	No Connection

and is compatible with widely available automated testing and insertion equipment. System oriented features include single power supply of 5V ± 10% tolerance, direct interfacing capability with high performance logic families such as Schottky TTL. The special feature of TC511001P/J/Z is nibble mode, allowing the user to serially access 4 bits of data at a high data rate. "Test Mode" function is implemented from Revision C.

- Low Power:
385mW MAX. Operating (TC511001P/J/Z-85)
330mW MAX. Operating (TC511001P/J/Z-10)
275mW MAX. Operating (TC511001P/J/Z-12)
5.5mW MAX. Standby
- Output unlatched at cycle end allows two-dimensional chip selection
- Common I/O capability using "EARLY WRITE" operation
- Read-Modify-Write, CAS before RAS refresh, RAS-only refresh, Hidden refresh, Nibble Mode and Test Mode capability
- All inputs and output TTL compatible
- 512 refresh cycles/8ms
- Packing Plastic DIP : TC511001P
Plastic SOJ : TC511001J
Plastic ZIP : TC511001Z

BLOCK DIAGRAM

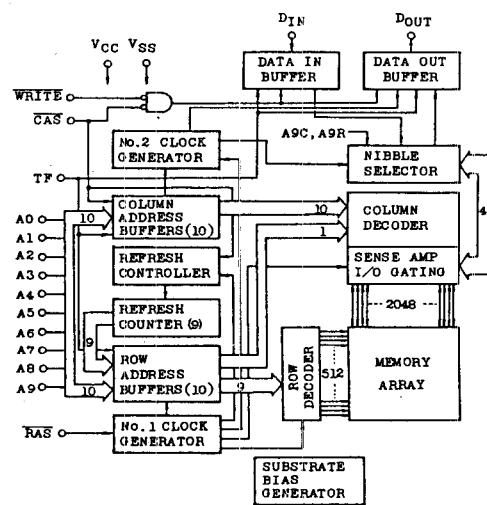

TC511001P/J/Z-85, TC511001P/J/Z-10 TC511001P/J/Z-12

ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	RATING	UNITS	NOTES
Input Voltage	V_{IN}	-1 ~ 7	V	1
Test Mode Input Voltage	$V_{IN(TF)}$	-1 ~ 10.5	V	1
Output Voltage	V_{OUT}	-1 ~ 7	V	1
Power Supply Voltage	V_{CC}	-1 ~ 7	V	1
Operating Temperature	T_{OPR}	0 ~ 70	°C	1
Storage Temperature	T_{STG}	-55 ~ 150	°C	1
Soldering Temperature•Time	T_{SOLDER}	260•10	°C•sec	1
Power Dissipation	P_D	600	mW	1
Short Circuit Output Current	I_{OUT}	50	mA	1

RECOMMENDED DC OPERATING CONDITIONS (Ta = 0 ~ 70°C)

SYMBOL	PARAMETER	MIN.	TYP.	MAX.	UNIT	NOTES
V_{CC}	Supply Voltage	4.5	5.0	5.5	V	2
V_{IH}	Input High Voltage	2.4	—	6.5	V	2
V_{IL}	Input Low Voltage	-1.0	—	0.8	V	2
$V_{IH(TF)}$	Test Enable Input High Voltage	$V_{CC} + 4.5$	—	10.5	V	2
$V_{IL(TF)}$	Test Disable Input Low Voltage	-1.0	—	$V_{CC} + 1.0$	V	2

DC ELECTRICAL CHARACTERISTICS (V_{CC} = 5 ± 10%, Ta = 0 ~ 70°C)

SYMBOL	PARAMETER	MIN.	MAX.	UNITS	NOTES
I_{CC1}	OPERATING CURRENT	TC511001P/J/Z-85	—	70	mA
	Average Power Supply Operating Current (RAS, CAS, Address Cycling: $t_{RC} = t_{RC\ MIN.}$)	TC511001P/J/Z-10	—	60	mA
		TC511001P/J/Z-12	—	50	mA
I_{CC2}	STANDBY CURRENT Power Supply Standby Current (RAS = CAS = V_{IH})	—	2	mA	3
I_{CC3}	RAS ONLY REFRESH CURRENT	TC511001P/J/Z-85	—	70	mA
	Average Power Supply Current, RAS Only Mode (RAS Cycling, CAS = V_{IH} : $t_{RC} = t_{RC\ MIN.}$)	TC511001P/J/Z-10	—	60	mA
		TC511001P/J/Z-12	—	50	mA
I_{CC4}	NIBBLE MODE CURRENT	TC511001P/J/Z-85	—	50	mA
	Average Power Supply Current, Nibble Mode (RAS = V_{IL} , CAS Cycling: $t_{NC} = t_{NC\ MIN.}$)	TC511001P/J/Z-10	—	40	mA
		TC511001P/J/Z-12	—	30	mA
I_{CC5}	STANDBY CURRENT Power Supply Standby Current (RAS = CAS = $V_{CC} - 0.2V$)	—	1	mA	
I_{CC6}	CAS BEFORE RAS REFRESH CURRENT	TC511001P/J/Z-85	—	70	mA
	Average Power Supply Current, CAS Before RAS Mode (RAS, CAS Cycling: $t_{RC} = t_{RC\ MIN.}$)	TC511001P/J/Z-10	—	60	mA
		TC511001P/J/Z-12	—	50	mA
$I_{I(L)}$	INPUT LEAKAGE CURRENT (any input except TF) Input Leakage Current, any input ($0V \leq V_{IN} \leq 6.5V$, All Other Pins Not Under Test = 0V)	-10	10	μA	
$I_{ITF(L)}$	INPUT LEAKAGE CURRENT (only TF) ($0V \leq V_{IN(TF)} \leq V_{CC} + 0.5V$, All Other Pins Not Under Test = 0V)	-10	10	μA	
$I_{O(L)}$	OUTPUT LEAKAGE CURRENT (DOUT is disabled, $0V \leq V_{OUT} \leq 5.5V$)	-10	10	μA	
I_{TF}	TEST FUNCTION INPUT CURRENT ($V_{CC} + 4.5V \leq V_{IN(TF)} \leq 10.5V$)	—	1	mA	
V_{OH}	OUTPUT LEVEL Output "H" Level Voltage ($I_{OUT} = -5mA$)	2.4	—	V	
V_{OL}	OUTPUT LEVEL Output "L" Level Voltage ($I_{OUT} = 4.2mA$)	—	0.4	V	

**TC511001P/J/Z-85, TC511001P/J/Z-10
TC511001P/J/Z-12**

ELECTRICAL CHARACTERISTICS AND RECOMMENDED AC OPERATING CONDITIONS

($V_{CC} = 5V \pm 10\%$, $T_a = 0 \sim 70^\circ C$) (Notes 5, 6, 7)

SYMBOL	PARAMETER	TC511001P/ J/Z-85		TC511001P/ J/Z-10		TC511001P/ J/Z-12		UNIT	NOTES
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
t_{RC}	Random Read or Write Cycle Time	165	—	190	—	220	—	ns	
t_{RWC}	Read-Write Cycle Time	190	—	220	—	255	—	ns	
t_{NC}	Nibble Mode Cycle Time	40	—	40	—	50	—	ns	
t_{NRMW}	Nibble Mode Read-Write Cycle Time	65	—	65	—	80	—	ns	
t_{RAC}	Access Time from \overline{RAS}	—	85	—	100	—	120	ns	8, 13
t_{CAC}	Access Time from \overline{CAS}	—	30	—	35	—	40	ns	8, 13
t_{AA}	Access Time from Column Address	—	45	—	50	—	60	ns	8, 14
t_{NCAC}	Nibble Mode Access Time	—	20	—	20	—	25	ns	8
t_{CLZ}	CAS to Output in Low-Z	5	—	5	—	5	—	ns	8
t_{OFF}	Output Buffer Turn-Off Delay	0	30	0	30	0	35	ns	9
t_T	Transition Time (Rise and Fall)	3	50	3	50	3	50	ns	7
t_{RP}	\overline{RAS} Precharge Time	70	—	80	—	90	—	ns	
t_{RAS}	\overline{RAS} Pulse Width	85	10,000	100	10,000	120	10,000	ns	
t_{RSH}	\overline{RAS} Hold Time	30	—	35	—	40	—	ns	
t_{CSH}	\overline{CAS} Hold Time	85	—	100	—	120	—	ns	
t_{CAS}	\overline{CAS} Pulse Width	30	10,000	35	10,000	40	10,000	ns	
t_{RCD}	\overline{RAS} to \overline{CAS} Delay Time	25	55	25	65	25	80	ns	13
t_{RAD}	\overline{RAS} to Column Address Delay Time	20	40	20	50	20	60	ns	14
t_{CRP}	\overline{CAS} to \overline{RAS} Precharge Time	10	—	10	—	10	—	ns	
t_{CPN}	\overline{CAS} Precharge Time	15	—	15	—	20	—	ns	
t_{ASR}	Row Address Set-Up Time	0	—	0	—	0	—	ns	
t_{RAH}	Row Address Hold Time	15	—	15	—	15	—	ns	
t_{ASC}	Column Address Set-Up Time	0	—	0	—	0	—	ns	
t_{CAH}	Column Address Hold Time	20	—	20	—	25	—	ns	
t_{AR}	Column Address Hold Time referenced to \overline{RAS}	65	—	75	—	90	—	ns	
t_{RAL}	Column Address to \overline{RAS} Lead Time	45	—	50	—	60	—	ns	
t_{RCS}	Read Command Set-Up Time	0	—	0	—	0	—	ns	
t_{RCH}	Read Command Hold Time referenced to \overline{CAS}	0	—	0	—	0	—	ns	10
t_{RRH}	Read Command Hold Time referenced to \overline{RAS}	0	—	0	—	0	—	ns	10
t_{WCH}	Write Command Hold Time	20	—	20	—	25	—	ns	
t_{WCR}	Write Command Hold Time referenced to \overline{RAS}	65	—	75	—	90	—	ns	
t_{WP}	Write Command Pulse Width	20	—	20	—	25	—	ns	
t_{RWL}	Write Command to \overline{RAS} Lead Time	20	—	25	—	30	—	ns	
t_{CWL}	Write Command to \overline{CAS} Lead Time	20	—	25	—	30	—	ns	
t_{DS}	Data-In Set-Up Time	0	—	0	—	0	—	ns	11
t_{DH}	Data-In Hold Time	20	—	20	—	25	—	ns	11
t_{DHR}	Data-In Hold Time referenced to \overline{RAS}	65	—	75	—	90	—	ns	
t_{REF}	Refresh Period	—	8	—	8	—	8	ms	

**TC511001P/J/Z-85, TC511001P/J/Z-10
TC511001P/J/Z-12**

ELECTRICAL CHARACTERISTICS AND RECOMMENDED AC OPERATING CONDITIONS (Continued)

SYMBOL	PARAMETER	TC511001P/ J/Z-85		TC511001P/ J/Z-10		TC511001P/ J/Z-12		UNITS	NOTES
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
t_{WCS}	Write Command Set-Up Time	0	—	0	—	0	—	ns	12
t_{CWD}	\overline{CAS} to \overline{WRITE} Delay Time	30	—	35	—	40	—	ns	12
t_{RWD}	\overline{RAS} to \overline{WRITE} Delay Time	85	—	100	—	120	—	ns	12
t_{AWD}	Column Address to \overline{WRITE} Delay Time	45	—	50	—	60	—	ns	12
t_{CSR}	\overline{CAS} Set-Up Time (\overline{CAS} before \overline{RAS})	10	—	10	—	10	—	ns	
t_{CHR}	\overline{CAS} Hold Time (\overline{CAS} before \overline{RAS})	30	—	30	—	30	—	ns	
t_{RPC}	\overline{RAS} Precharge to \overline{CAS} Active Time	0	—	0	—	0	—	ns	
t_{CPT}	\overline{CAS} Precharge Time (\overline{CAS} before \overline{RAS} Counter Test)	50	—	50	—	60	—	ns	
t_{NCAS}	Nibble Mode Pulse Width	20	—	20	—	25	—	ns	
t_{NCP}	Nibble Mode \overline{CAS} Precharge Time	10	—	10	—	15	—	ns	
t_{NRSH}	Nibble Mode \overline{RAS} Hold Time	20	—	20	—	25	—	ns	
t_{NCWD}	Nibble Mode \overline{CAS} to \overline{WRITE} Delay Time	20	—	20	—	25	—	ns	
t_{NRWL}	Nibble Mode \overline{WRITE} Command to \overline{RAS} Lead Time	20	—	20	—	25	—	ns	
t_{NCWL}	Nibble Mode \overline{WRITE} Command to \overline{CAS} Lead Time	20	—	20	—	25	—	ns	
t_{TES}	Test Mode Enable Set-Up Time referenced to \overline{RAS}	0	—	0	—	0	—	ns	
t_{TEHR}	Test Mode Enable Hold Time referenced to \overline{RAS}	0	—	0	—	0	—	ns	
t_{TEHC}	Test Mode Enable Hold Time referenced to \overline{CAS}	0	—	0	—	0	—	ns	

CAPACITANCE ($V_{CC} = 5V \pm 10\%$, $f = 1MHz$, $T_a = 0 \sim 70^\circ C$)

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
C_{I1}	Input Capacitance ($A_0 \sim A_9$, D_{IN})	—	5	pF
C_{I2}	Input Capacitance (\overline{RAS} , \overline{CAS} , \overline{WRITE} , TF)	—	7	pF
C_O	Output Capacitance (D_{OUT})	—	7	pF


NOTES:

1. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device.
2. All Voltages are referenced to V_{SS} .
3. I_{CC1} , I_{CC3} , I_{CC4} , I_{CC6} depend on cycle rate.
4. I_{CC1} , I_{CC4} depend on output loading. Specified values are obtained with the output open.
5. An initial pause of $200\mu s$ is required after power-up followed by any 8 \overline{RAS} cycles before proper device operation is achieved. In case of using internal refresh counter, a minimum of 8 \overline{CAS} before \overline{RAS} initialization cycles instead of 8 \overline{RAS} cycles are required.
6. AC measurements assume $t_T = 5ns$.
7. V_{IH} (min.) and V_{IL} (max.) are reference levels for measuring timing of input signals. Also, transition times are measured between V_{IH} and V_{IL} .
8. Measured with a load equivalent to 2 TTL loads and $100pF$.
9. t_{OFF} (max.) define the time at which the output achieves the open circuit condition and is not referenced to output voltage levels.
10. Either t_{RCH} or t_{RRH} must be satisfied for a read cycle.
11. These parameters are referenced to \overline{CAS} leading edge in early write cycles and to \overline{WRITE} leading edge in read-write cycles.
12. t_{WCS} , t_{RWD} , t_{CWD} and t_{AWD} are not restrictive operating parameters. They are included in the data sheet as electrical characteristics only. If $t_{WCS} \geq t_{WCS}$ (min.), the cycle is an early write cycle and data out pin will remain open circuit (high impedance) throughout the entire cycle; If $t_{RWD} \geq t_{RWD}$ (min.), $t_{CWD} \geq t_{CWD}$ (min.) and $t_{AWD} \geq t_{AWD}$ (min.), the cycle is a read-write cycle and the data out will contain data read from the selected cell; If neither of the above sets of conditions is satisfied, the condition of the data out (at access time) is indeterminate.
13. Operation within the t_{RCD} (max.) limit insures that t_{RAC} (max.) can be met. t_{RCD} (max.) is specified as a reference point only: If t_{RCD} is greater than the specified t_{RCD} (max.) limit, then access time is controlled by t_{CAC} .
14. Operation within the t_{RAD} (max.) limit insures that t_{RAC} (max.) can be met. t_{RAD} (max.) is specified as a reference point only: If t_{RAD} is greater than the specified t_{RAD} (max.) limit, then access time is controlled by t_{AA} .


TC511001P/J/Z-85, TC511001P/J/Z-10 TC511001P/J/Z-12

TIMING WAVEFORMS

- READ CYCLE

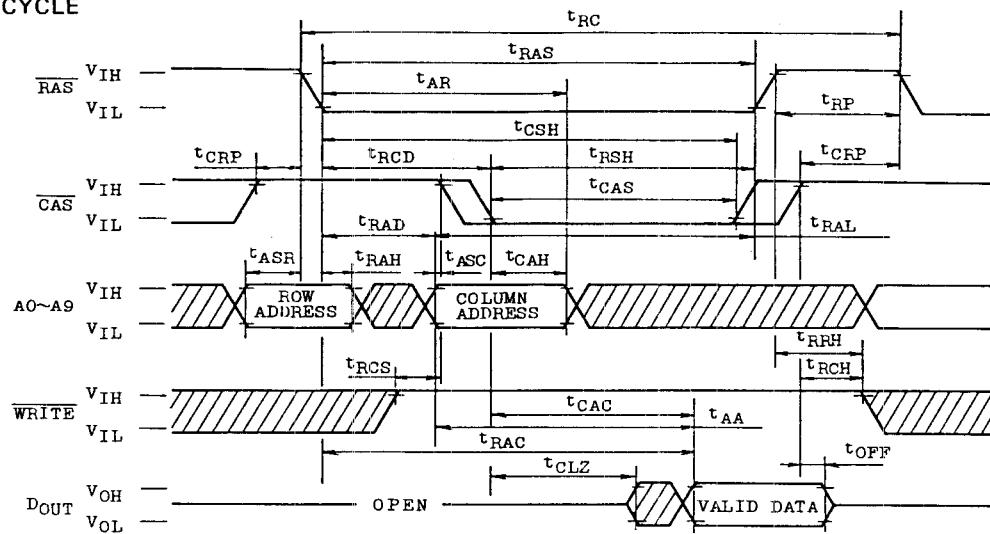


- WRITE CYCLE (EARLY WRITE)

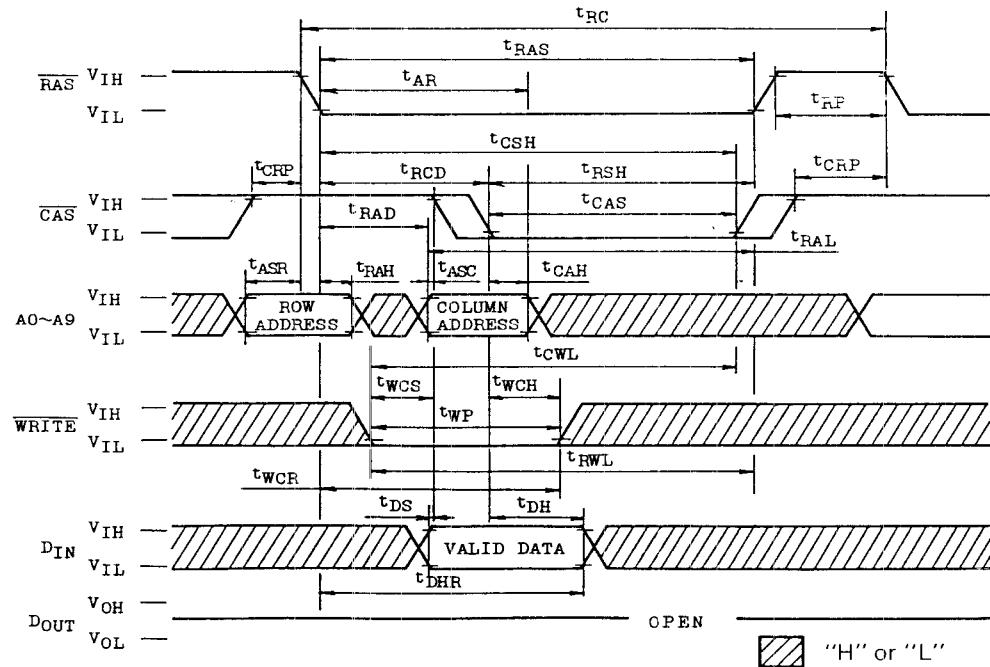

NOTE: "TF" pin should be connected to $V_{IL(TF)}$ level or open, if "Test Mode" is not used.

**TC511001P/J/Z-85, TC511001P/J/Z-10
TC511001P/J/Z-12**

- READ-WRITE CYCLE

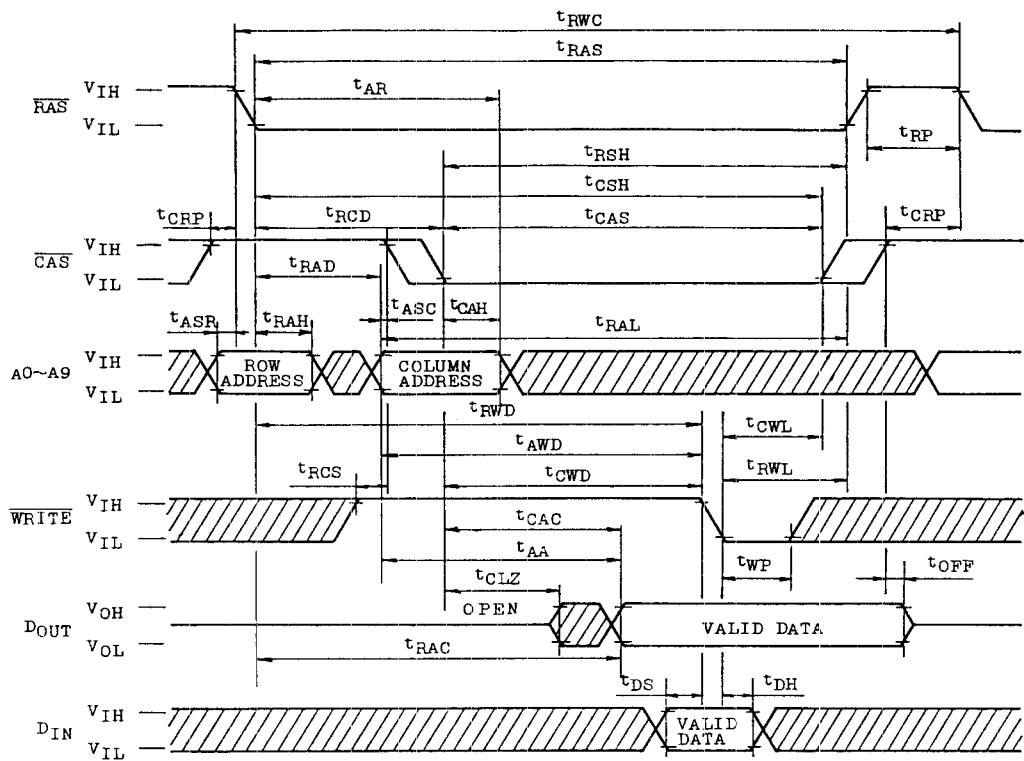


 : "H" or "L"

NOTE: "TF" pin should be connected to $V_{IL(TF)}$ level or open, if "Test Mode" is not used.


TC511001P/J/Z-85, TC511001P/J/Z-10 TC511001P/J/Z-12

- RAS ONLY REFRESH CYCLE

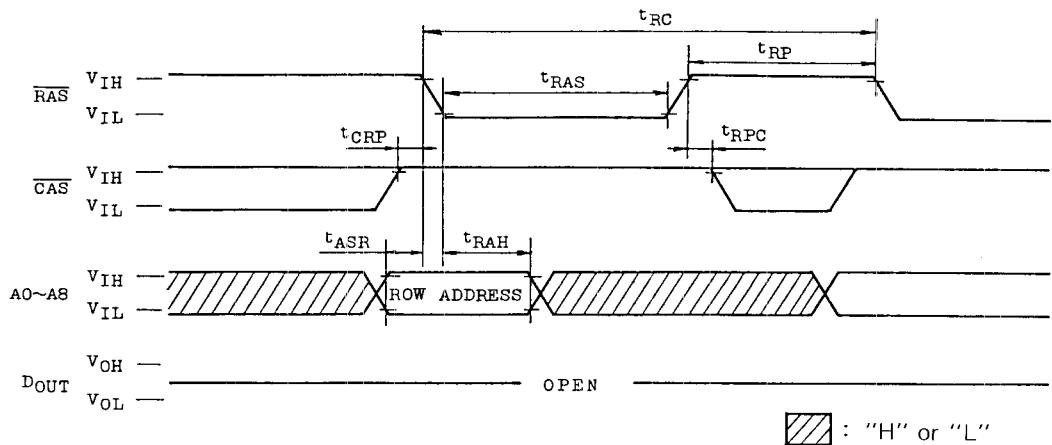

NOTE: WRITE = "H" or "L", A9 = "H" or "L"


- CAS BEFORE RAS REFRESH CYCLE

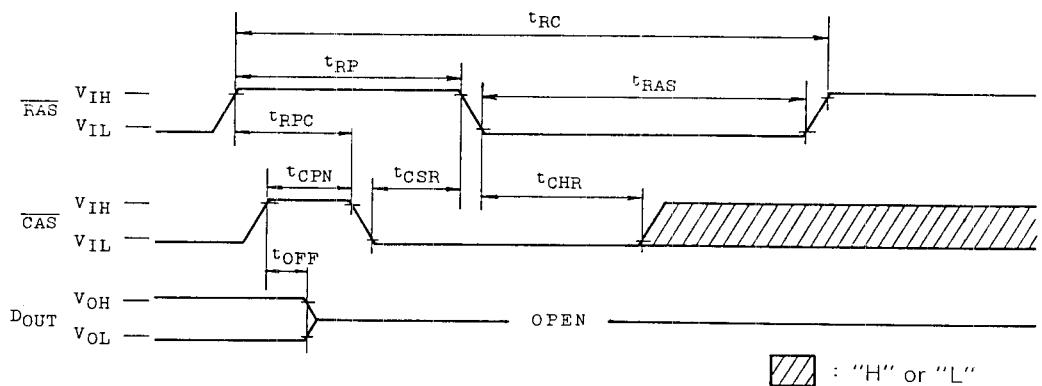

NOTE: WRITE = "H" or "L", A0 ~ A9 = "H" or "L"

"TF" pin should be connected to $V_{IL(TF)}$ level or open, if "Test Mode" is not used.

• CAS BEFORE RAS REFRESH COUNTER TEST CYCLE

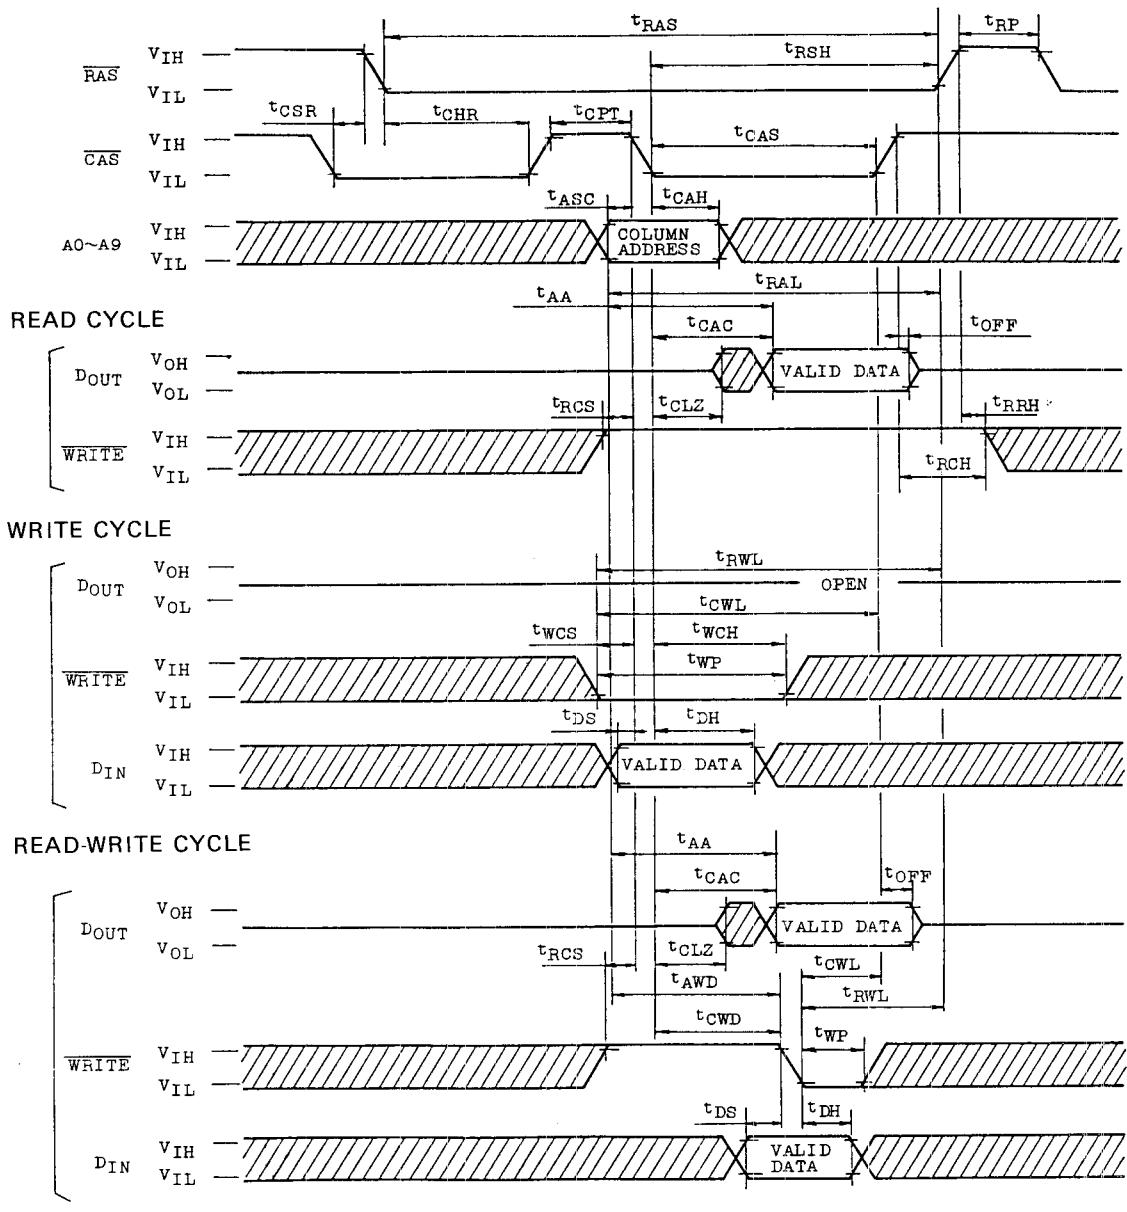


■ : "H" or "L"


NOTE: "TF" pin should be connected to $V_{IL(TF)}$ level or open, if "Test Mode" is not used.

TC511001P/J/Z-85, TC511001P/J/Z-10 TC511001P/J/Z-12

- HIDDEN REFRESH CYCLE (READ)

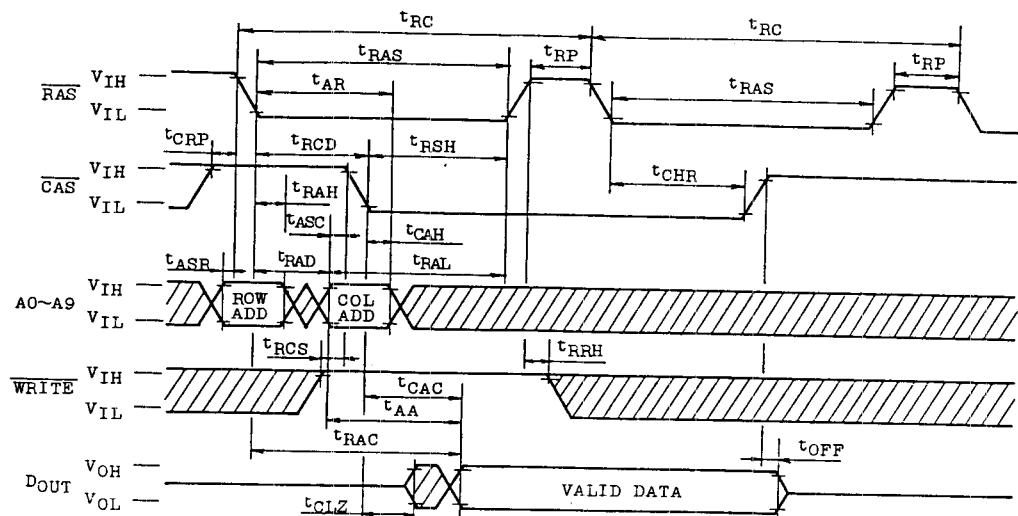

- HIDDEN REFRESH CYCLE (WRITE)

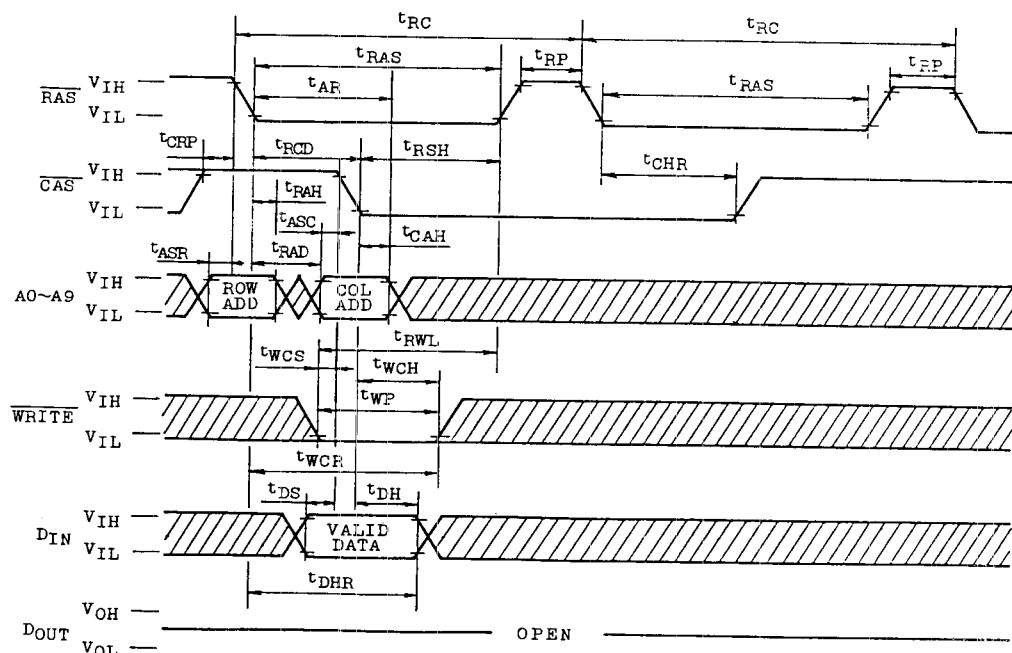

■ : "H" or "L"

NOTE: "TF" pin should be connected to V_{IL(TF)} level or open, if "Test Mode" is not used.

APPLICATION INFORMATION

ADDRESSING

The 20 address bits required to decode 1 of the 1,048,576 cell locations within the TC511001P/J/Z are multiplexed onto the 10 address inputs and latched into the on-chip address latches by externally applying two negative going TTL-level clocks.

The first clock, the Row Address Strobe (RAS), latches the 10 row address bits into the chip. The second clock, the Column Address Strobe (CAS), subsequently latches the 10 column address bits into the chip. Each of these signals, RAS, and CAS, triggers a sequence of events which are controlled by different delayed internal clocks.

The two clock chains are linked together logically in such a way that the address multiplexing operation is done outside of the critical path timing sequence for read data access. The later events in the CAS clock sequence are inhibited until the occurrence of a delayed signal derived from the RAS clock chain. This "gated CAS" feature allows the CAS clock to be externally activated as soon as the Row Address Hold Time specification (t_{RAH}) has been satisfied and the address inputs have been changed from Row address to Column address information.

DATA INPUT/OUTPUT

Data to be written into a selected cell is latched into an on-chip register by a combination of WRITE and CAS while RAS is active. The later of the signals (WRITE or CAS) to make its negative transition is the strobe for the Data In (D_{IN}) register. This permits several options in the write cycle timing. In a write cycle, if the WRITE input is brought low (active) prior to CAS, the D_{IN} is strobed by CAS and the set-up and hold times are referenced to CAS. If the input data is not available at CAS time or if it is desired that the cycle is a read-write cycle, the WRITE signal will be delayed until after CAS has made its negative transition. In this "delayed write cycle" the data input set-up and hold times are referenced to the negative edge of WRITE rather than CAS. (To illustrate this feature, D_{IN} is referenced to WRITE in the timing diagrams depicting the read-write and nibble mode write cycles while the "early write" cycle diagram shows D_{IN} referenced to CAS).

Data is retrieved from the memory in a read cycle by maintaining WRITE in the inactive or high state throughout the portion of the memory cycle in which


CAS is active(low). Data read from the selected cell will be available at the output within the specified access time.

DATA OUTPUT CONTROL

The normal condition of the Data Output (D_{OUT}) of the TC511001P/J/Z is the high impedance (open circuit) state. This is to say, anytime CAS is at a high level, the D_{OUT} pin will be floating. The only time the output will turn on and contain either a logic 0 or logic 1 is at access time during a read cycle. D_{OUT} will remain valid from access time until CAS is taken back to the inactive (high level) condition.

NIBBLE MODE

Nibble mode operation allows faster successive data operation on 4 bits. The first of 4 bits is accessed in the usual manner with read data coming out at t_{CAC} time. By keeping RAS low, CAS can be cycled up and then down, to read or write the next three pages at high data rate (faster than t_{CAC}). Row and column addresses need only be supplied for the first access of the cycles. From then on, the falling edge of CAS will activate the next bit. After four bits have been accessed, the next bit will be the same as the first bit accessed (wrap-around method).



Address A9 determines the starting point of the circular 4 bits nibble. Row A9 and column A9 provide the two binary bits needed to select one of four bits. From then on, successive bits come out in a binary fashion; $00 \rightarrow 01 \rightarrow 10 \rightarrow 11$ with A9 row being the least significant address.

A nibble cycle can be a read, write, or delayed write cycle. Any combinations of reads and writes or late writes will be allowed. In addition, the circular wrap-around will continue for as long as RAS is kept low.

RAS ONLY REFRESH

Refresh of the dynamic cell matrix is accomplished by performing a memory cycle at each of the 512 row address ($A_0 \sim A_8$) within each 8 millisecond time interval. Although any normal memory cycle

TC511001P/J/Z-85, TC511001P/J/Z-10 TC511001P/J/Z-12

will perform the refresh operation, this function is most easily accomplished with "RAS-only" cycles.


CAS BEFORE RAS REFRESH

CAS before RAS refreshing available on the TC511001P/J/Z offers an alternate refresh method. If CAS is held on low for the specified period (t_{CSR}) before RAS goes to low, on chip refresh control clock generators and the refresh address counter are enabled, and an internal refresh operation takes place. After the refresh operation is performed, the refresh address counter is automatically incremented in

preparation for the next CAS before RAS refresh operation.

HIDDEN REFRESH

An optional feature of the TC511001P/J/Z is that refresh cycles may be performed while maintaining valid data at the output pin. This referred to as Hidden Refresh. Hidden Refresh is performed by holding CAS at V_{IL} and taking RAS high and after a specified precharge period (t_{RP}), executing a CAS before RAS refresh cycle. (see Figure below)

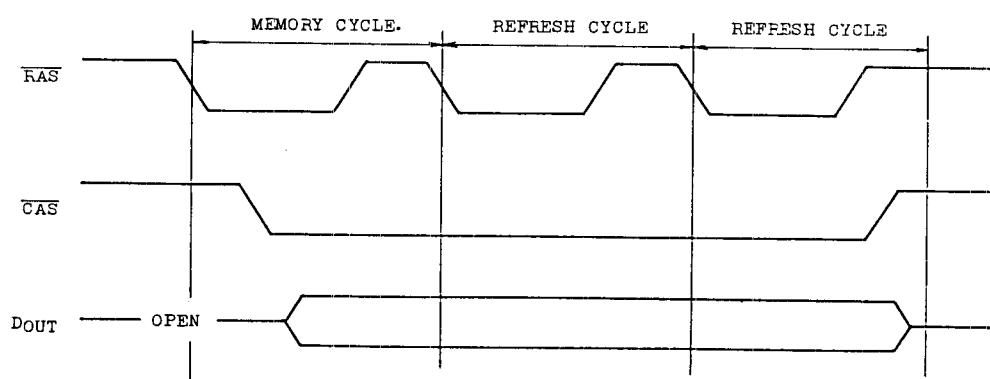

This feature allows a refresh cycle to be "hidden" among data cycles without affecting the data availability.

CAS BEFORE RAS REFRESH COUNTER TEST

The internal refresh operation of TC511001P/J/Z can be tested by CAS BEFORE RAS REFRESH COUNTER TEST. This cycle performs READ/ WRITE operation taking the internal counter address as row address and the input address as column address.

The test is performed after a minimum of 8 CAS before RAS cycles as initialization cycles. The test procedure is as follows.

- ① Write "0" into all the memory cells at normal

write mode.

- ② Select one certain column address and read "0" out and write "1" in each cell by performing CAS BEFORE RAS REFRESH COUNTER TEST (READ-WRITE CYCLE). Repeat this operation 512 times.
- ③ Check "1" out of 512 bits at normal read mode, which was written at ②.
- ④ Using the same column as ②, read "1" out and write "0" in each cell performing CAS BEFORE RAS REFRESH COUNTER TEST. Repeat this operation 512 times.
- ⑤ Check "0" out of 512 bits at normal read mode, which was written at ④.
- ⑥ Perform the above ① to ⑤ the complement data.


TEST MODE

The TC511001P/J/Z is the RAM organized 1,048,576 words by 1 bit, it is internally organized 262,144 words by 4 bits. In "Test Mode", data would be written into a number of sectors (4 sectors) in parallel and retrieved the same way. If, upon reading, all bits are equal (all "H" or "L"), the data output pin indicates a same data as all bits. In this case, the data output pin indicates an expected data for good

parts, the data output pin indicates a complementary data for bad parts. And also, if any of the bits differed, the data output pin would indicate a high impedance state for bad parts. Fig. 1 shows the block diagram of TC511001P/J/Z including its truth table when "Test Mode" is used.

In test mode, 1MDRAM can be tested as if it were 256K DRAM by the following method.

Block Diagram in Test Mode

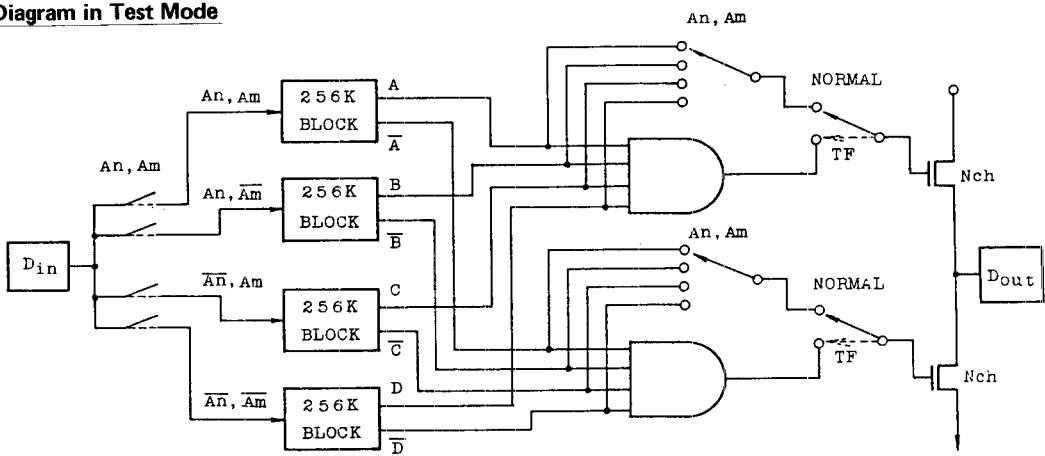

TF Pin = Super Voltage; Test Mode

TF Pin = $V_{IL(TF)}$ level or Hi-Z; Normal

Truth Table in Test Mode Function

A	B	C	D	DOUT
0	0	0	0	0
1	1	1	1	1
Otherwise				Hi-Z

Fig. 1

TC511001P/J/Z-85, TC511001P/J/Z-10 TC511001P/J/Z-12

"Test Mode" function is performed on any of the timing cycles except Nibble mode when "TF" pin is held on "super voltage ($V_{CC} + 4.5V$ ($V_{CC} = 5V \pm 10\%$), max. voltage = $10.5V$)" for the specified period (t_{TES} , t_{TEHR} and t_{TEHC} ; see Fig. 2). The address input of A9 is ignored in the "Test Mode".

On the other hand, normal operation requires the "TF" pin be connected to $V_{IL(TF)}$ level, or left unconnected on the printed wiring board. The "Test Mode" function reduces test times (1/4; in case of using N test pattern). This "Test Mode" function is implemented from Revision "C".

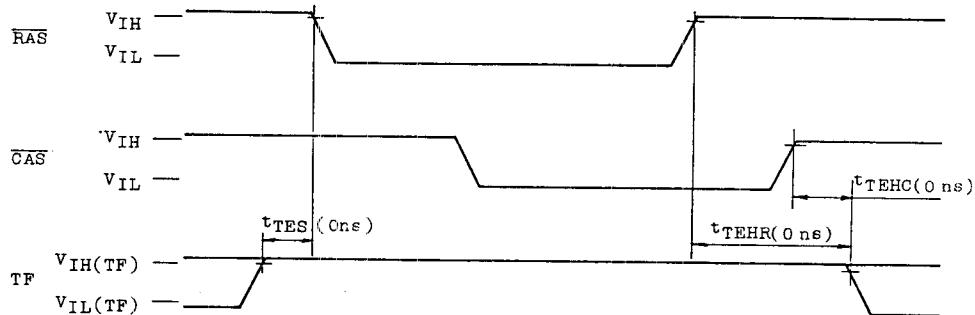





Fig. 2 Test Mode Cycle

TC511001P/J/Z-85, TC511001P/J/Z-10 TC511001P/J/Z-12

OUTLINE DRAWINGS

- Plastic DIP

Unit: in mm

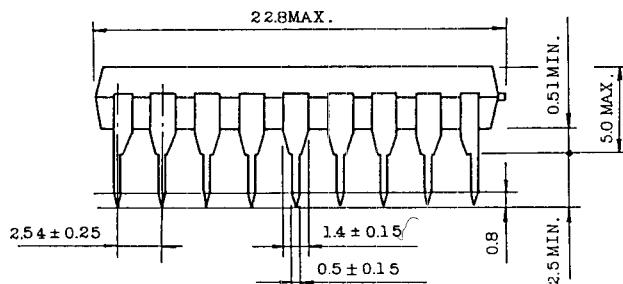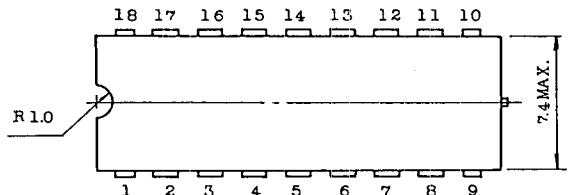


NOTE: Each lead pitch is 2.54mm.

All leads are located within 0.25mm of their true longitudinal position with respect to No. 1 and No. 18 leads.


All dimensions are in millimeters.

TC511001P/J/Z-85, TC511001P/J/Z-10 TC511001P/J/Z-12

● Plastic SOJ

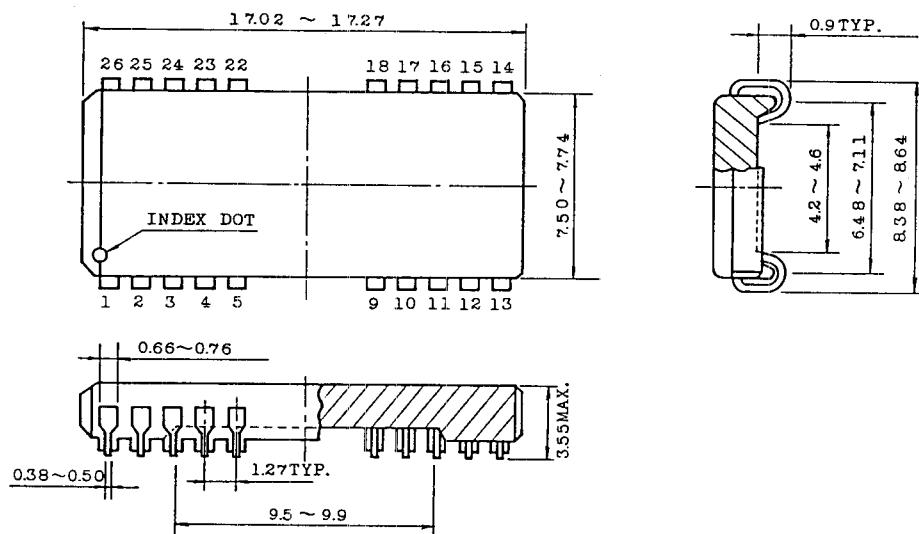

● Plastic ZIP

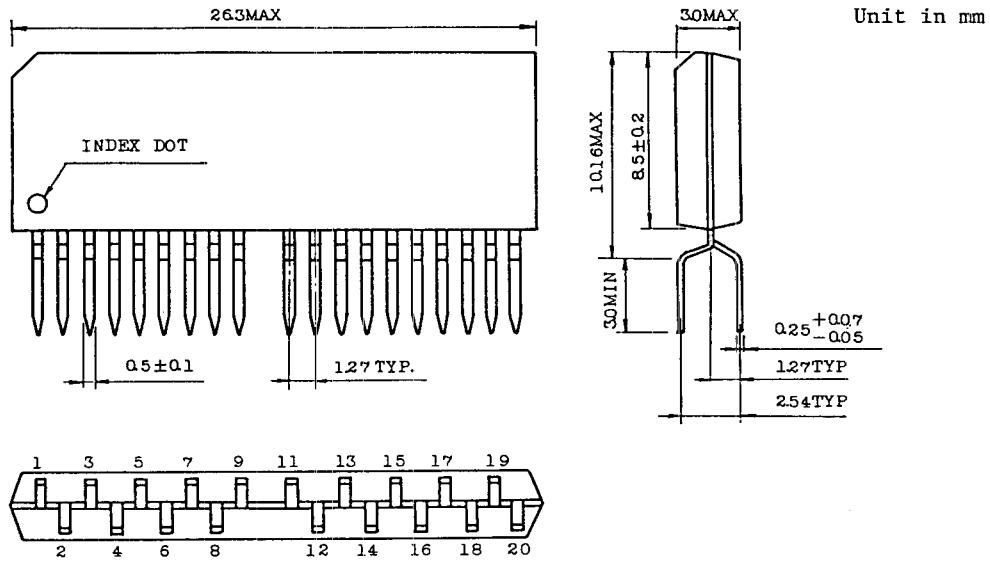

NOTE: Each lead pitch is 1.27mm.

All dimensions are in millimeters.

Toshiba does not assume any responsibility for use of any circuitry described; no circuit patent licenses are implied, and Toshiba reserves the right, at any time without notice, to change said circuitry.