


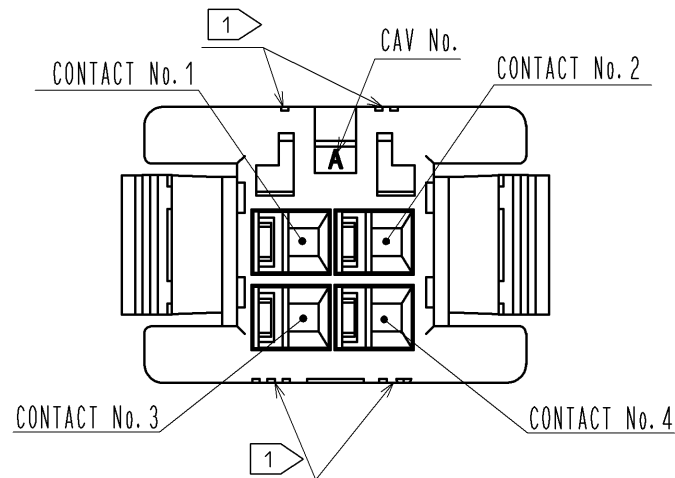
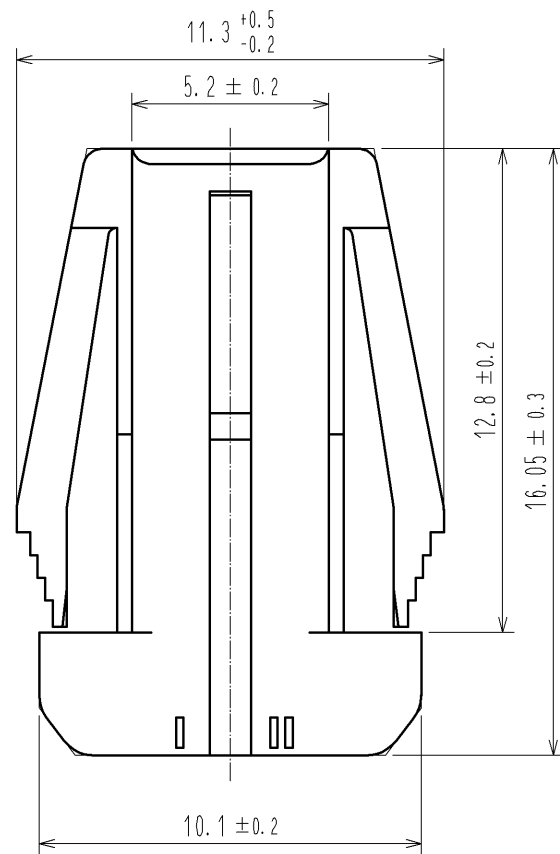


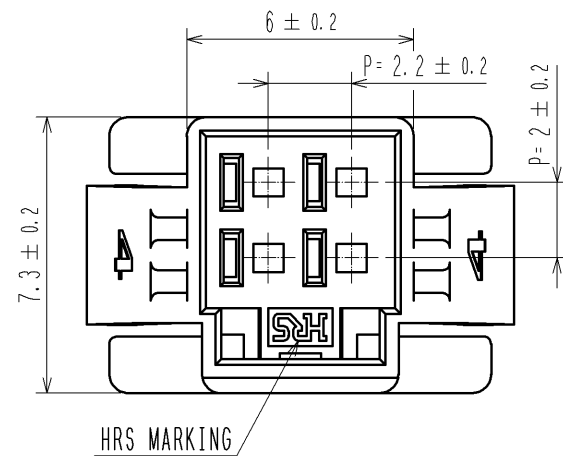


NUMBER OF POS.

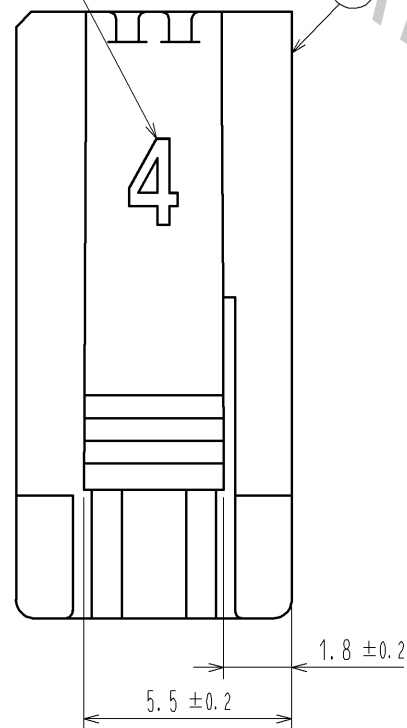


1 FIGURE-1 CONTACT No. MARKING (10:1)

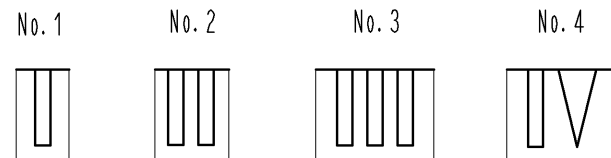


7 MATING FIGURE (PANEL MOUNTED)

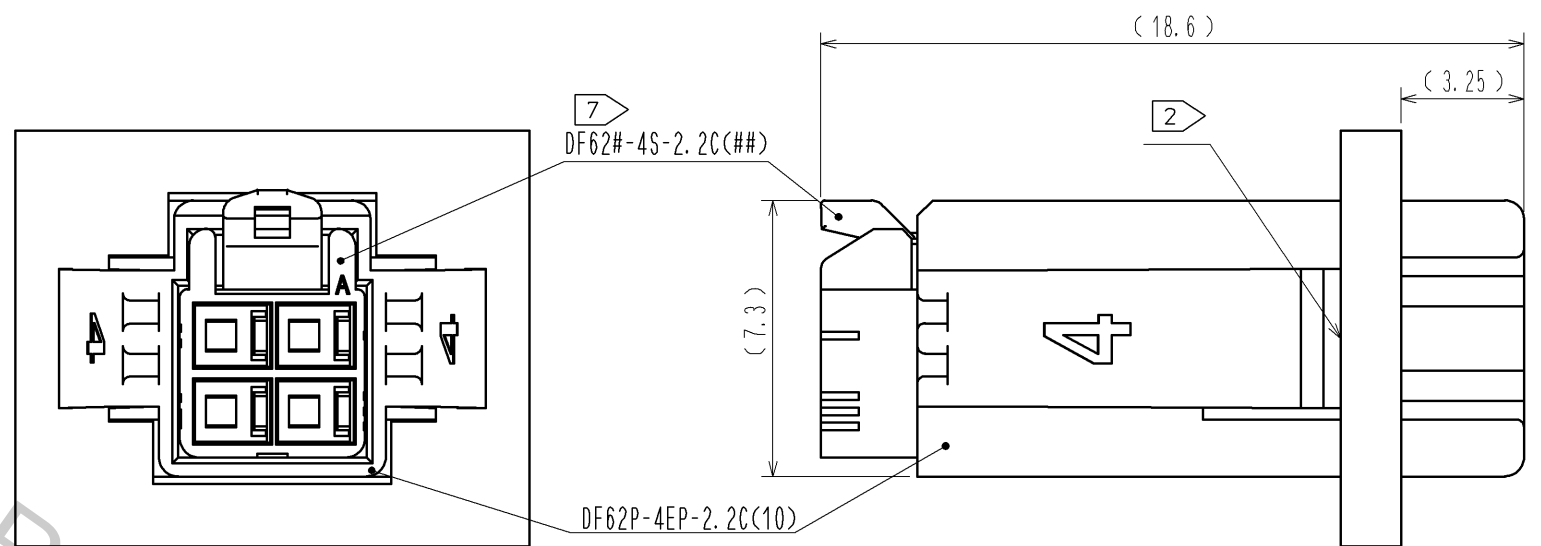

3 4 RECOMMENDED PANEL CUTOUT DIMENSION

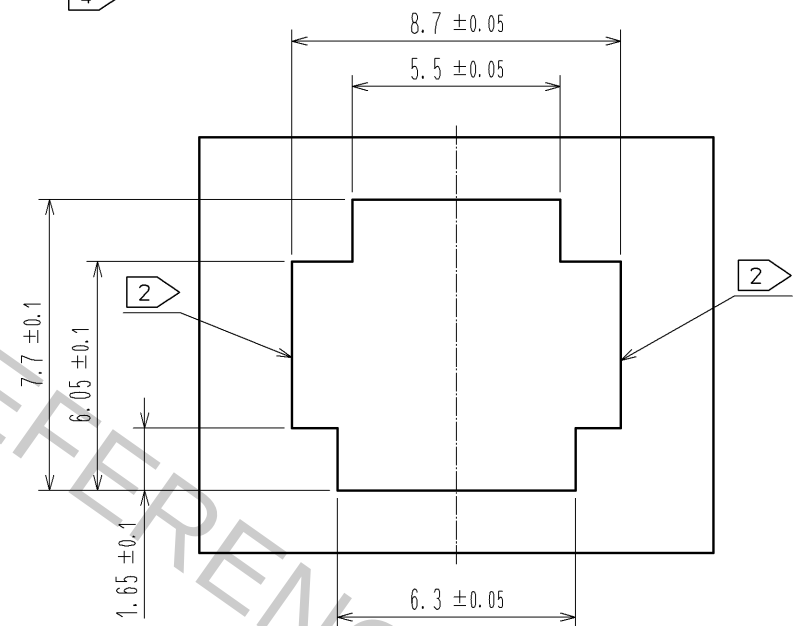

- NOTE. 1 MARKINGS AT THE INDICATED POSITIONS ARE CONTACT NO. MARKING, AND SHAPES ARE SHOWN IN FIGURE-1.
2 PLEASE USE THE NON-RADIUS SIDE FOR THE PANEL HOOKING AREA.
3 APPLICABLE PANEL THICKENESS IS 2.3 TO 0.5mm.
4 CONSULT HIROSE FOR THE OTHER PANEL CUTOUT DESIGNS THAN THE RECOMMENDED ONE.
5. PER PACK : 100 PIECES.
6. THE DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.
7 THIS FIGURE SHOWS THE MATED CONDITION WITH DF62B-4S-2.2C.

			1		PBT		UL94V-0<WHITE>					
NO.	MATERIAL		FINISH . REMARKS			NO.	MATERIAL		FINISH . REMARKS			
UNITS mm			SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS			DESIGNED		CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.			APPROVED : KI. AKIYAMA			14. 03. 10		DRAWING NO.		EDC3-349137-01		
			CHECED : HK. UMEHARA			14. 03. 10		PART NO.		DF62P-4EP-2. 2C<10>		
			DESIGNED : TS. KUMAZAWA			14. 03. 07		CODE NO.		CL544-0545-7-10		
			DRAWN : TS. KUMAZAWA			14. 03. 07				 1/1		