

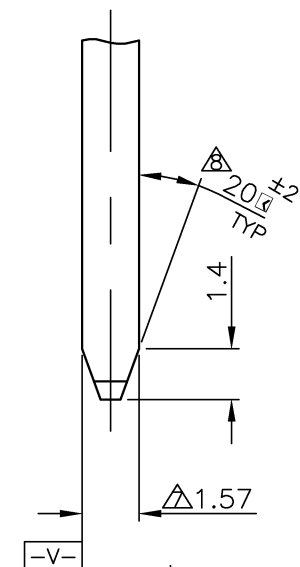


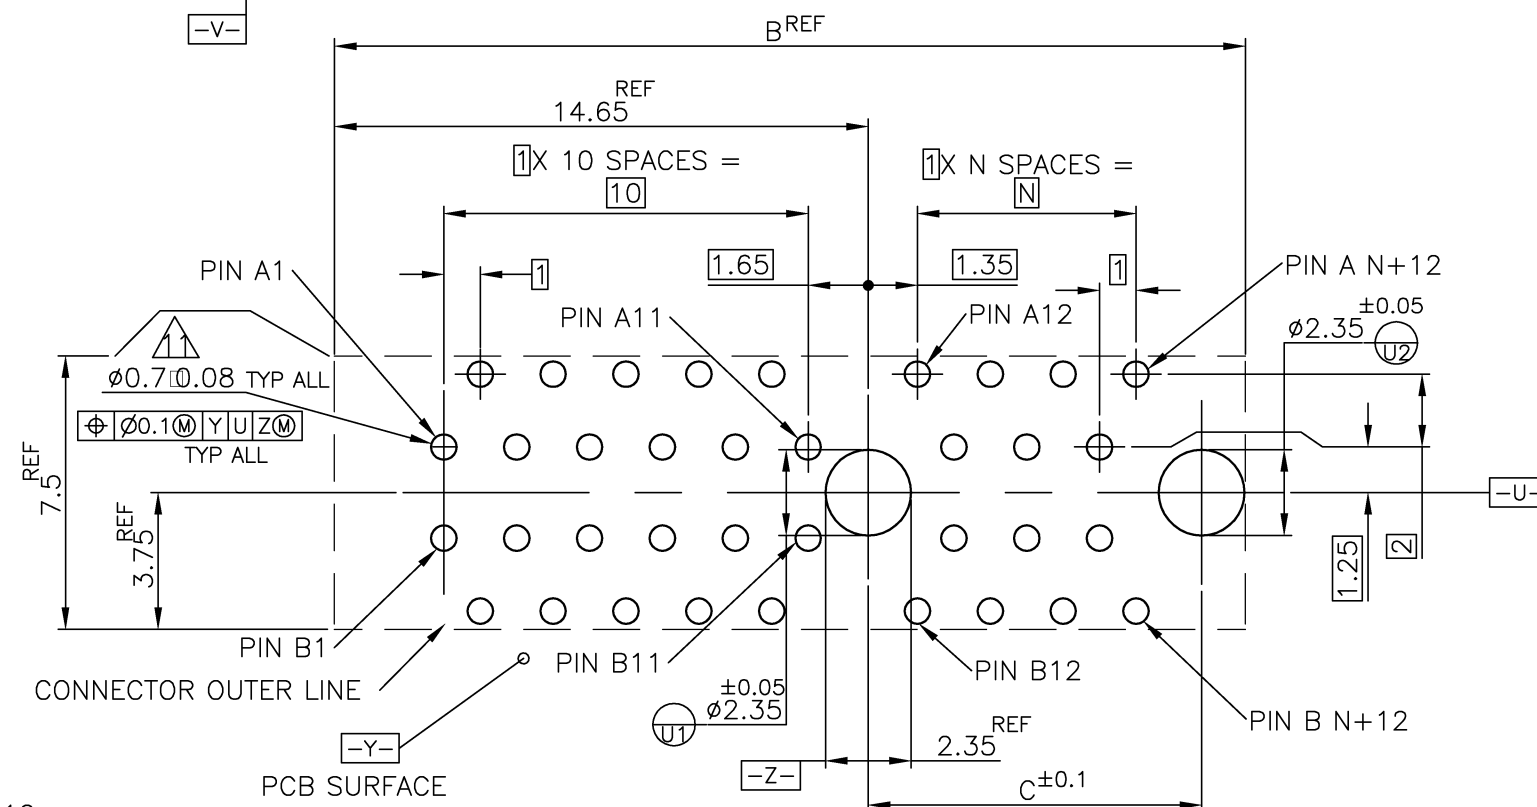

 THIS DIMENSION IS ONLY APPLIED TO PRSNT PINS.
 CARD THICKNESS APPLIES ACROSS TABS AND INCLUDES
 PLATING AND/OR METALIZATION.
 CHAMFER EDGES MUST BE FREE OF CUTTING BURRS.
 9 NO TIE BAR PERMITTED FROM CARD EDGE TO LEADING EDGE
 OF PAD FOR PRSNT PIN.
 10 APPLICATION NOTE;
 GOLD CONTACT PAD : ELECTROLESS GOLD PLATING 0.05μm MIN.
 OVER ELECTROLESS Ni PLATING 2μm MIN.
 DRILLED HOLE DIA.: 0.77 TO 0.83
 COPPER PLATING: 0.025 TO 0.075mm.
 FINISHED HOLE DIA. AFTER PLATING: 0.62 TO 0.78 DIA.

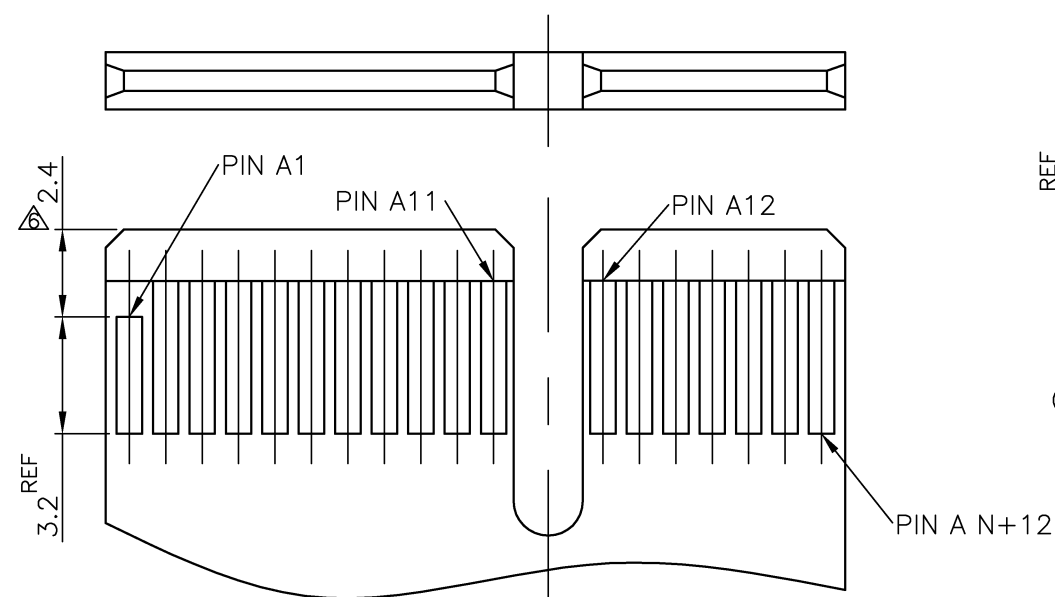

PCB PATTERN LAYOUT (THICKNESS : 1.6mm MIN)

THIS DRAWING IS A CONTROLLED DOCUMENT.

A1,B17,B31,B48,B81,B139	130.15	131.15	147	128	280	
A1,B17,B31,B48,B81	72.15	73.15	89	70	164	16
A1,B17,B31,B48	39.15	40.15	56	37	98	8
A1,B17,B31	22.15	23.15	39	20	64	4
A1,B17	8.15	9.15	25	6	36	1
PRSNT PIN	E	C	B	N	POS.	PORT

0 PLC	$\pm$ —	± 0.13
1 PLC	$\pm$ —	± 1
2 PLC	$\pm$ —	
3 PLC	$\pm$ —	
4 PLC	$\pm$ —	
ANGLES	$\pm$ —	

ANGLES	
FINISH	
仕上	

CUSTOMER DRAWING

REV	
-----	--