
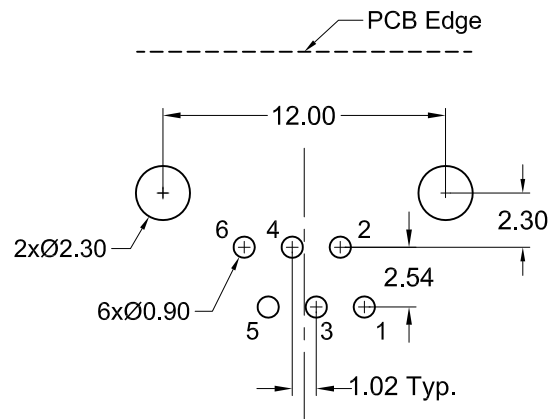
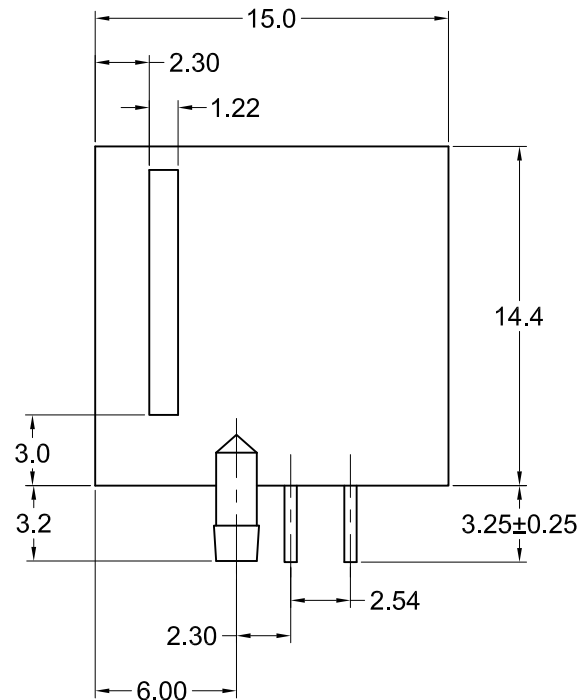


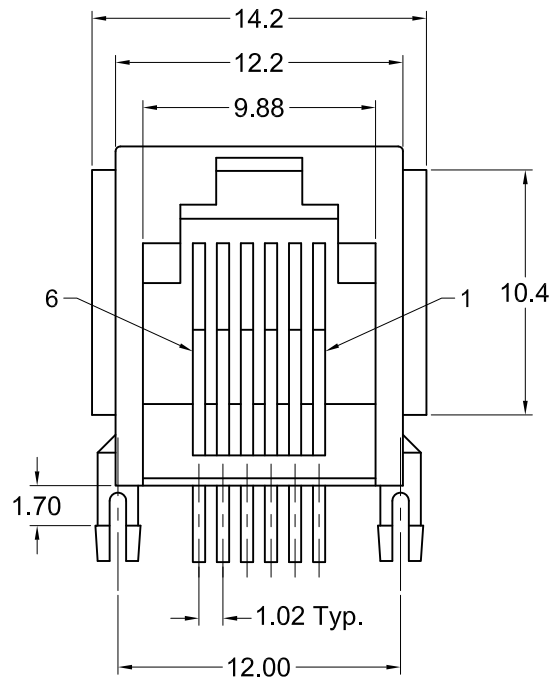

Recommended PCB Layout
(Bottom View)

Part Number	Contact Area Plating Finish	Color
GLX-A-66	Gold Flash (standard)	Grey
GLX-A-66-15	15u" Gold (15 option)	Grey
GLX-A-66-50	50u" Gold (50 option)	Grey
GLX-A-66-BLK	Gold Flash (standard)	Black

Materials and Finish

Housing Material-
PBT thermoplastic
UL 94V-0 rated

Contact Material-
phosphor bronze

Contact Plating Options-

Standard: gold flash over
nickel on entire contact

15: 15u" gold over
nickel on entire contact

50: 50u" gold over
nickel on entire contact to
comply with FCC Requirements
under No. 47 C.F.R. Part 68,
Subpart F

Electrical Characteristics

Current Rating-
1.5 Amps

Voltage Rating-
125V DC

Insulation Resistance-
500 Megohms min.

Dielectric Withstanding Voltage-
1000V rms, 60Hz

Contact Resistance-
20 milliohms max.

RoHS COMPLIANT
EU Directive 2002/95/EC

UL
E134345

SP
LR78160

Tolerances
X.X ± 0.35
X.XX ± 0.25
Unless Stated
Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	2/7/08	ECO # 08-001	R. Aguirre	H. MA	R. Aguirre	9/16/05
A2	02/27/09	ECO #09-023	S. Vien	H. MA		
A3	07/30/09	ECO #09-055	S. Vien	H. MA		
A4	05/13/10	ECO #10-025	S. Vien	H. MA		
A5	12/07/11	ECO #11-081	S. Vien	H. MA		
A6	12/12/13	ECO #13-091	D. Gih	H. MA		

GLX-A-66

Right Angle Modular Jack, Through Hole, .570" Ht.

6 Position, 6 Contacts, Panel Stops, RoHS Compliant



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kycon:](#)

[GLX-A-66-50](#) [GLX-A-66](#)