



a. Part as supplied

342A124-3-G02

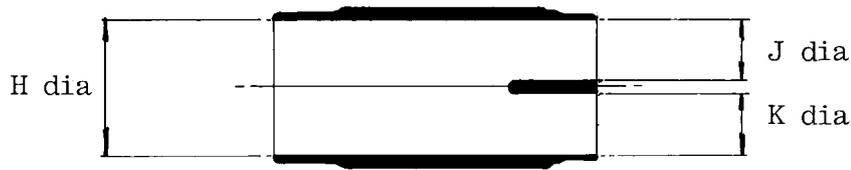

b. Part as supplied.

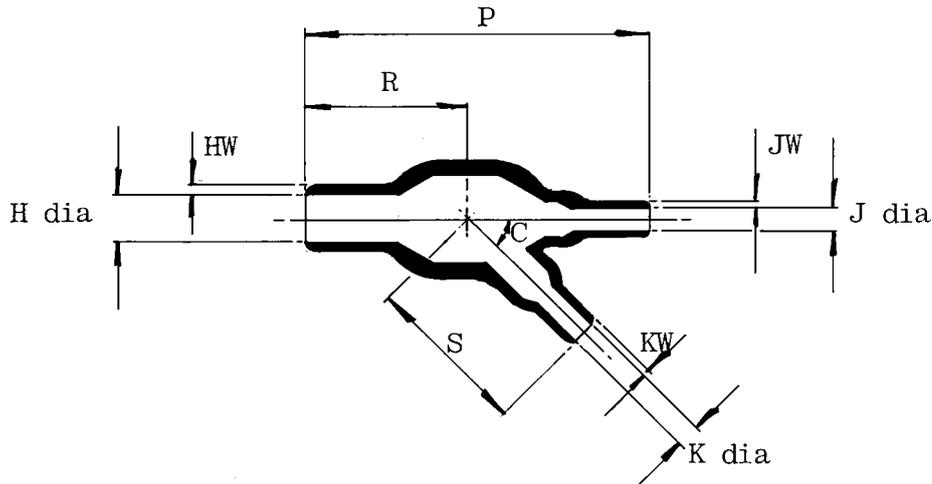

Dimensions (in millimetres)

Part No.	H		J & K		P	R	S	HW	JW & KW	C
	min a	max b	min a	max b	$\pm 10\%$ b	$\pm 10\%$ b	$\pm 10\%$ b	$\pm 20\%$ b	$\pm 20\%$ b	$\pm 5^\circ$ b
342A124-3 -G02	27	12,4	16	6,1	90	42	43	2,5	1,5	45°

Drawn G. Evans Checked *W. Ellis* Issue 1 Date December 1981


Approval

Design *KEW*


MKTG *FRD*

O.C. *[Signature]*

Conforms to ISO Recommendations
3rd Angle Projection
Not to scale



Ordering Information

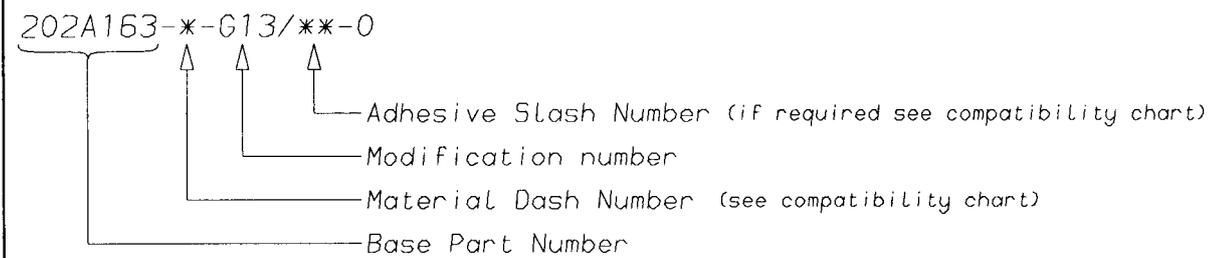

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42, /86
-4	POLYOLEFIN, FLEXIBLE	/42, /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
 Electronics OEM Division Europe
 Swindon, Wiltshire, England.
 Telephone: (01793) 528171 Fax: 573923