

FEATURES

- * 0.39 INCH (10.0 mm) DIGIT HEIGHT.
- * CONTINUOUS UNIFORM SEGMENTS.
- * LOW POWER REQUIREMENT.
- * EXCELLENT CHARACTERS APPEARANCE.
- * HIGH BRIGHTNESS & HIGH CONTRAST.
- * WIDE VIEWING ANGLE.
- * SOLID STATE RELIABILITY.
- * CATEGORIZED FOR LUMINOUS INTENSITY.


DESCRIPTION

The LTS-4801P is a 0.39 inch (10.0 mm) height seven-segment display. This device utilizes bright red LED chips, which are made from GaP on GaP substrate, and has a gray face and white segments.

DEVICE


| PART NO. | DESCRIPTION |
|------------|------------------|
| BRIGHT RED | Common Anode |
| LTS-4801P | Rt. Hand Decimal |

PACKAGE DIMENSIONS

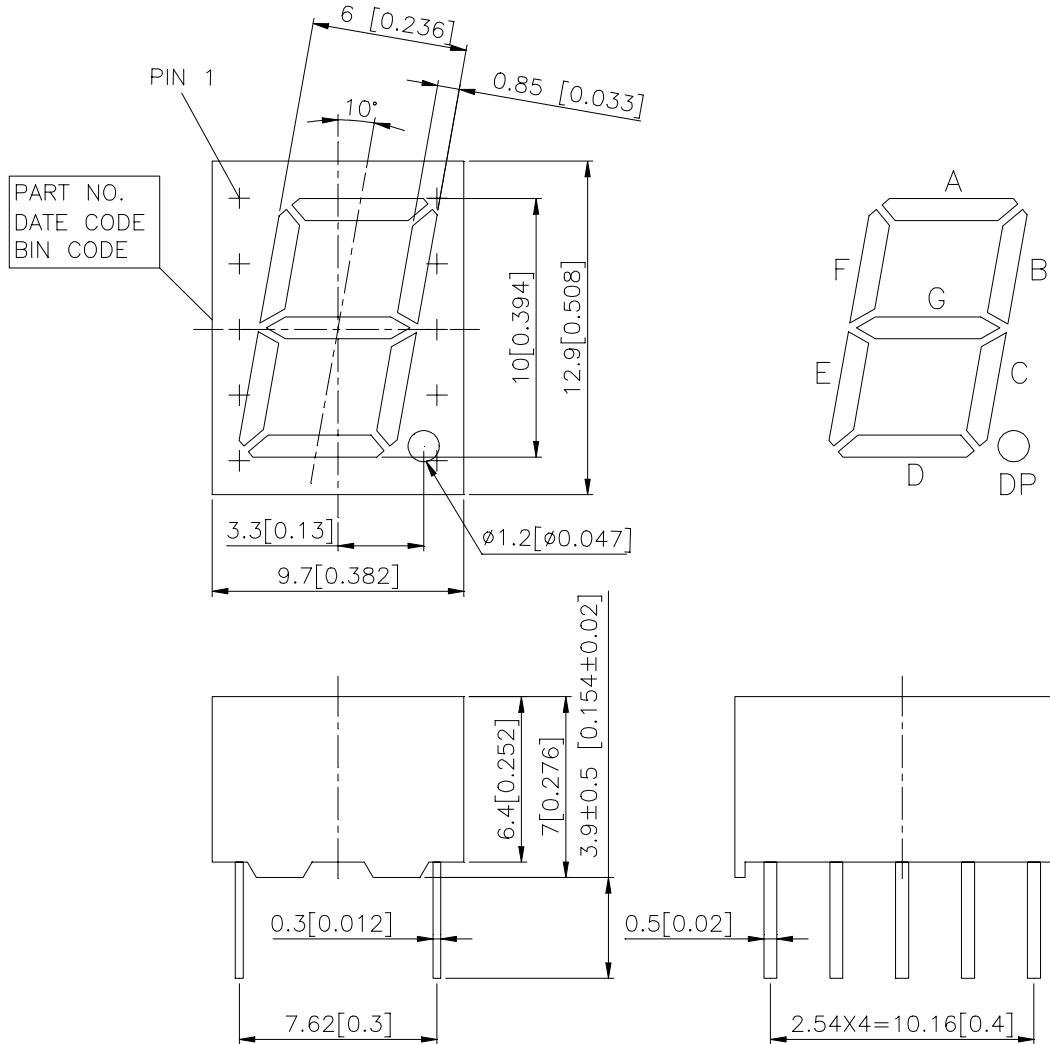

NOTES: All dimensions are in millimeters. Tolerance: $\pm 0.25\text{-mm}$ (0.01") unless otherwise noted.

INTERNAL CIRCUIT DIAGRAM

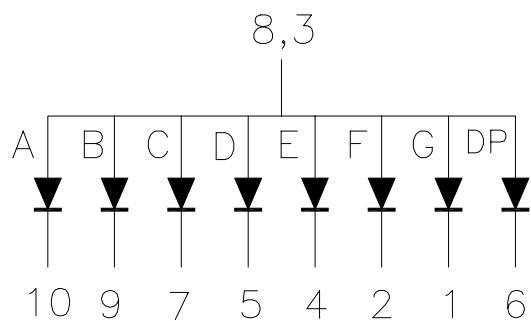

PIN CONNECTION

| No. | CONNECTION |
|-----|--------------|
| 1 | CATHODE G |
| 2 | CATHODE F |
| 3 | COMMON ANODE |
| 4 | CATHODE E |
| 5 | CATHODE D |
| 6 | CATHODE D.P. |
| 7 | CATHODE C |
| 8 | COMMON ANODE |
| 9 | CATHODE B |
| 10 | CATHODE A |

NOTE::PIN 3 & 8 ARE INTERNALLY CONNECTED.

ABSOLUTE MAXIMUM RATING AT Ta=25°C

| PARAMETER | MAXIMUM RATING | UNIT |
|--|----------------|-------|
| Power Dissipation Per Segment | 40 | mW |
| Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width) | 60 | mA |
| Continuous Forward Current Per Segment | 15 | mA |
| Derating Linear From 25°C Per Segment | 0.2 | mA/°C |
| Reverse Voltage Per Segment | 5 | V |
| Operating Temperature Range | -35°C to +85°C | |
| Storage Temperature Range | -35°C to +85°C | |
| Solder Temperature 1/16 inch Below Seating Plane for 3 Seconds at | 260°C | |

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25°C

| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT | TEST CONDITION |
|-------------------------------------|------------------|------|------|------|------|----------------------|
| Average Luminous Intensity | I _v | 320 | 800 | | μcd | I _F =10mA |
| Peak Emission Wavelength | λ _p | | 697 | | nm | I _F =20mA |
| Spectral Line Half-Width | Δλ | | 90 | | nm | I _F =20mA |
| Dominant Wavelength | λ _d | | 657 | | nm | I _F =20mA |
| Forward Voltage Per Segment or D.P. | V _F | | 2.1 | 2.6 | V | I _F =20mA |
| Reverse Current Per Segment or D.P. | I _R | | | 100 | μA | V _R =5V |
| Luminous Intensity Matching Ratio | I _{v-m} | | | 2:1 | | I _F =10mA |

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (commision internationale DE L'clairage) eye-response curve.

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

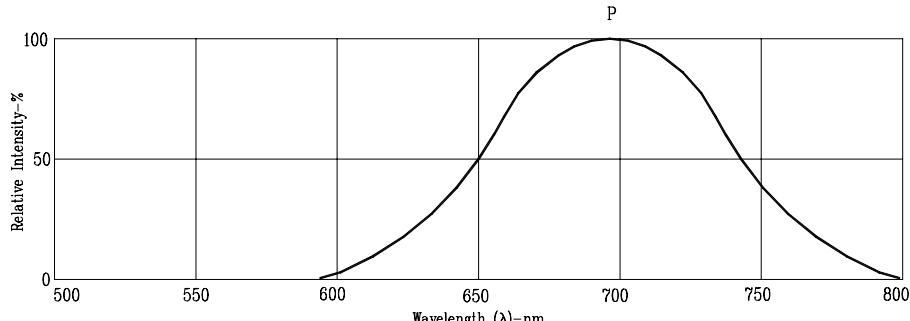







Fig1. RELATIVE INTENSITY VS. WAVELENGTH

Fig2. RELATIVE LUMINOUS EFFICIENCY
(LUMINOUS INTENSITY PER UNIT
CURRENT) VS. PEAK CURRENT
(REFRESH RATE 1KHz)Fig3. FORWARD CURRENT VS.
FORWARD VOLTAGEFig4. RELATIVE LUMINOUS INTENSITY
VS. FORWARD CURRENTFig5. MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE.Fig6. MAX. PEAK CURRENT VS.
DUTY CYCLE %
(REFRESH RATE 1KHz)

NOTE: P=BRIGHT RED