

1. High Frequency Use (Non Magnetic Core) RF, RE, ND, NC, NA




■ Features

- High frequency capability due to its non magnetic core.
- Capable of being Re-flow or flow soldered.
- Wide line-up from 1005 to 3225 case sizes.
- Good for mounting.
- RoHS compliant

■ Recommended Applications

- RF circuitry for cellular phones and wireless communication equipment.

■ Explanation of Part Numbers

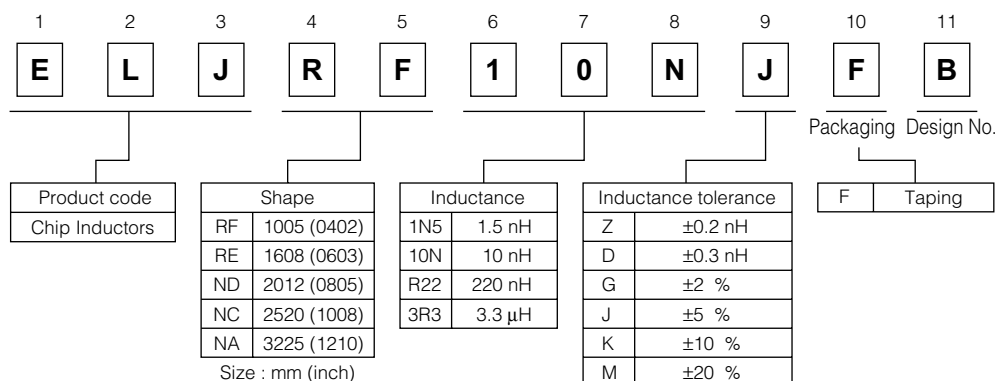

■ Storage Conditions

- Package : Normal temperature (−5 to 35 °C), normal humidity (85 %RH max.), shall not be exposed to direct sunlight and harmful gases and care should be taken so as not to cause dew.
- Operating Temperature : −20 to +85 °C

■ Storage Period

- Solderability may be reduced due to the conditions of high temperature and high humidity which causes the oxidation of tin-plated terminals. Even if storage conditions are within specified limits, solderability may be reduced with the passage of time. Therefore, please control the storage conditions and try to use the product within 6 months of receipt.


■ Packaging Methods Please see Page 127

■ Soldering Conditions Please see Page 128


■ Safety Precautions Please see Page 129

■ RF Type 1005 (0402)

● Dimensions in mm (not to scale)



● Recommended Land Pattern in mm (not to scale)

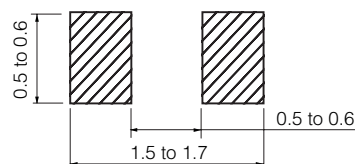

■ Standard Packing Quantity

● 10000 pcs./Reel

■ Standard Parts (E12 series)

Part No.	Inductance			Q		SRF *1 (MHz) min.	R _{DC} *2 (Ω) max.	DC Current (mA) max.	
	(nH)	Tolerance (%)	Test Freq. (MHz)	min.	Test Freq. (MHz)				
ELJRF1N0□FB	1.0	D : ±0.3 nH	Z : ±0.2 nH	100	8	100	6000	0.05	400
ELJRF1N2□FB	1.2						6000	0.06	400
ELJRF1N5□FB	1.5						6000	0.07	400
ELJRF1N8□FB	1.8						6000	0.08	400
ELJRF2N2□FB	2.2						6000	0.09	400
ELJRF2N7□FB	2.7						5500	0.10	400
ELJRF3N3□FB	3.3						5500	0.12	400
ELJRF3N9□FB	3.9						5200	0.15	360
ELJRF4N7□FB	4.7						4800	0.17	360
ELJRF5N6□FB	5.6						4600	0.19	340
ELJRF6N8□FB	6.8	J : ±5 %	G : ±2 %	100	8	100	4000	0.30	320
ELJRF8N2□FB	8.2						3500	0.35	320
ELJRF10N□FB	10						2800	0.41	320
ELJRF12N□FB	12						2800	0.45	320
ELJRF15N□FB	15						2500	0.60	240
ELJRF18N□FB	18						2200	0.70	240
ELJRF22N□FB	22						2000	0.80	200
ELJRF27N□FB	27						1800	1.20	200
ELJRF33N□FB	33						1800	1.40	170
ELJRF39N□FB	39						1800	1.70	150
ELJRF47N□FB	47	1800	2.10	140					
ELJRF56N□FB	56	1500	2.50	130					
ELJRF68N□FB	68	1500	4.00	120					
ELJRF82N□FB	82	1400	4.50	110					
ELJRFR10□FB	100	1200	5.50	90					

□ : Symbol of Tolerance *1 : Self Resonant Frequency *2 : DC Resistance

■ Standard Parts (E24 series)

Part No.	Inductance			Q		SRF *1 (MHz) min.	R _{DC} *2 (Ω) max.	DC Current (mA) max.	
	(nH)	Tolerance (%)	Test Freq. (MHz)	min.	Test Freq. (MHz)				
ELJRF2N0□FB	2.0	D : ±0.3 nH	Z : ±0.2 nH	100	8	100	6000	0.08	400
ELJRF2N4□FB	2.4						6000	0.09	400
ELJRF3N0□FB	3.0						5500	0.11	400
ELJRF3N6□FB	3.6						5300	0.14	380
ELJRF4N3□FB	4.3						5000	0.16	360
ELJRF5N1□FB	5.1						4700	0.18	350
ELJRF6N2□FB	6.2	J : ±5 %	G : ±2 %	100	8	100	4300	0.25	330
ELJRF7N5□FB	7.5						3700	0.33	320
ELJRF9N1□FB	9.1						3100	0.38	320
ELJRF11N□FB	11						2800	0.43	320
ELJRF13N□FB	13						2600	0.53	280
ELJRF16N□FB	16						2300	0.65	240
ELJRF20N□FB	20						2100	0.75	220
ELJRF24N□FB	24						1900	1.00	200
ELJRF30N□FB	30						1800	1.30	190
ELJRF36N□FB	36	1800	1.60	160					
ELJRF43N□FB	43						1800	1.90	150


□ : Symbol of Tolerance *1 : Self Resonant Frequency *2 : DC Resistance

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Sep. 2010

■ ELJRF Type

■ Typical Characteristics

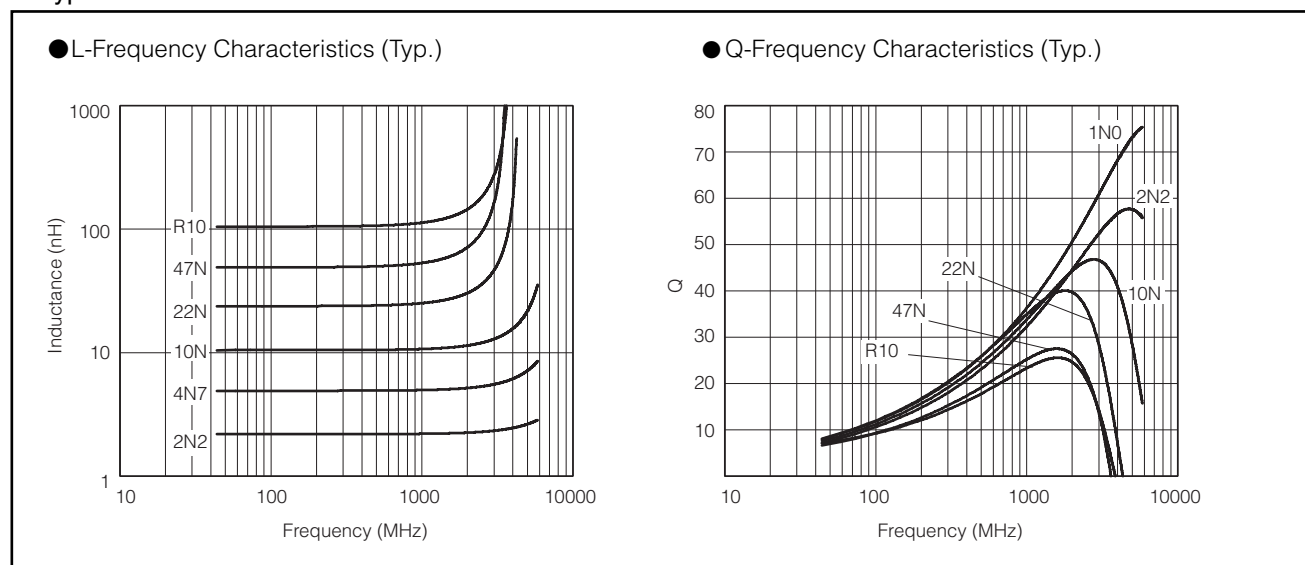


■ Reference Date

Part No	Inductance (nH)(Typ.)					Q(Typ.)				
	800MHz	900MHz	1.8GHz	2.0GHz	2.4GHz	800MHz	900MHz	1.8GHz	2.0GHz	2.4GHz
ELJRF1N0□FB	0.95	0.95	0.96	0.96	0.97	31.8	33.8	47.2	49.6	54.0
ELJRF1N2□FB	1.23	1.24	1.24	1.25	1.25	31.0	33.0	43.4	45.6	49.7
ELJRF1N5□FB	1.51	1.51	1.53	1.53	1.54	32.9	34.9	48.6	50.9	55.4
ELJRF1N8□FB	1.85	1.85	1.87	1.88	1.90	31.1	33.1	45.9	48.1	52.1
ELJRF2N2□FB	2.11	2.12	2.15	2.16	2.19	28.3	30.1	41.6	43.6	47.2
ELJRF2N7□FB	2.63	2.63	2.68	2.70	2.73	28.0	28.7	39.6	41.4	44.7
ELJRF3N3□FB	3.27	3.28	3.35	3.37	3.42	29.9	31.7	43.7	45.7	49.2
ELJRF3N9□FB	3.73	3.74	3.82	3.85	3.91	29.7	31.5	43.4	45.4	48.8
ELJRF4N7□FB	4.77	4.78	4.92	4.96	5.07	33.9	35.9	49.0	51.1	54.6
ELJRF5N6□FB	5.70	5.70	5.80	5.90	6.20	30.0	31.0	40.0	41.0	42.8
ELJRF6N8□FB	6.91	6.93	7.21	7.29	7.51	28.9	30.7	41.3	42.7	45.0
ELJRF8N2□FB	8.31	8.33	8.73	8.86	9.19	31.0	32.9	43.9	45.3	47.4
ELJRF10N□FB	10.21	10.25	10.77	10.94	11.37	29.8	31.6	42.1	43.5	45.6
ELJRF12N□FB	12.3	12.3	13.1	13.3	14.0	30.8	32.6	42.9	44.1	45.4
ELJRF15N□FB	15.3	15.4	16.5	16.9	17.9	28.8	30.4	39.5	40.4	41.2
ELJRF18N□FB	18.4	18.6	20.2	20.8	22.3	31.1	32.8	41.6	42.1	41.7
ELJRF22N□FB	23.7	23.9	27.5	28.8	32.5	31.3	32.9	39.6	39.4	37.2
ELJRF27N□FB	28.3	28.5	32.8	34.4	38.8	28.4	29.9	36.0	35.8	33.7
ELJRF33N□FB	34.6	35.1	43.4	46.8	57.5	28.4	29.7	33.7	32.9	29.2
ELJRF39N□FB	40.8	41.4	49.9	53.2	63.3	25.6	26.9	31.1	30.5	27.5
ELJRF47N□FB	49.6	50.3	62.1	66.8	81.8	22.7	23.8	26.9	26.2	23.2
ELJRF56N□FB	58.4	59.1	69.9	74.1	86.2	23.8	25.0	28.9	28.3	25.6
ELJRF68N□FB	71.9	72.9	90.4	97.5	119.9	22.3	23.3	25.4	24.3	20.4
ELJRF82N□FB	86.6	87.8	107.8	115.7	140.6	21.9	22.9	25.5	24.6	21.3
ELJRFR10□FB	105.5	106.8	128.2	136.5	161.3	21.0	21.9	25.0	24.4	21.9


□ : Symbol of Tolerance

RE Type 1608 (0603)

● Dimensions in mm (not to scale)

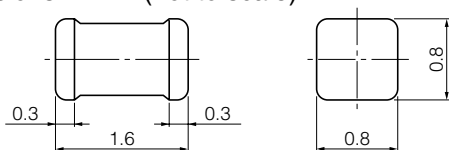

● Recommended Land Pattern in mm (not to scale)



Standard Packing Quantity

● 3000 pcs./Reel


Standard Parts (E12 series)

Part No.	Inductance			Q		SRF ^{#1} (MHz) min.	R _{DC} ^{#2} (Ω) max.	DC Current (mA) max.																							
	(nH)	Tolerance (%)	Test Freq. (MHz)	min.	Test Freq. (MHz)																										
ELJRE1N0□FA	1.0	D : ±0.3 nH	Z : ±0.2 nH	100	7	100	6000	0.05	500																						
ELJRE1N2□FA	1.2						6000	0.06	500																						
ELJRE1N5□FA	1.5						8	6000	0.07	500																					
ELJRE1N8□FA	1.8							6000	0.08	500																					
ELJRE2N2□FA	2.2							6000	0.09	500																					
ELJRE2N7□FA	2.7							6000	0.10	500																					
ELJRE3N3□FA	3.3	J : ±5 %	G : ±2 %	100	9	100	5500	0.12	500																						
ELJRE3N9□FA	3.9						5500	0.15	450																						
ELJRE4N7□FA	4.7						4800	0.17	450																						
ELJRE5N6□FA	5.6						4600	0.18	430																						
ELJRE6N8□FA	6.8						3550	0.20	430																						
ELJRE8N2□FA	8.2						3500	0.28	400																						
ELJRE10N□FA	10		10	2800	0.32	400																									
ELJRE12N□FA	12						2800	0.35	400																						
ELJRE15N□FA	15									2500	0.41	350																			
ELJRE18N□FA	18												2300	0.45	350																
ELJRE22N□FA	22															2000	0.50	300													
ELJRE27N□FA	27																		2000	0.55	300										
ELJRE33N□FA	33	1800																				0.60	300								
ELJRE39N□FA	39																							1800	0.80	300					
ELJRE47N□FA	47																										1800	0.95	250		
ELJRE56N□FA	56																													1800	1.20
ELJRE68N□FA	68		1500	1.30	250																										
ELJRE82N□FA	82					1500	1.50	250																							
ELJRER10□FA	100								1300	1.80	200																				
ELJRER12□FA	120											25.2	5	25.2	1200																
ELJRER15□FA	150														1100	4.50	100														
ELJRER18□FA	180														1000	6.50	80														
ELJRER22□FA	220	900													7.50	70															

□ : Symbol of Tolerance *1 : Self Resonant Frequency *2 : DC Resistance

■ ELJRE Type

■ Typical Characteristics

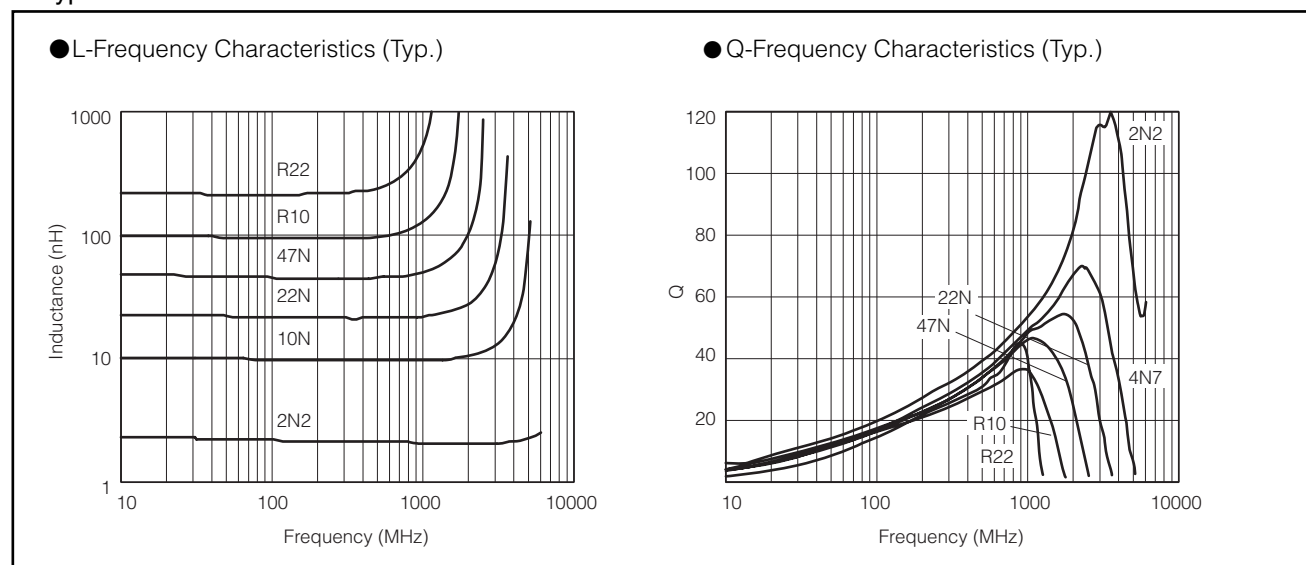

■ Reference Date

Part No	Inductance (nH)(Typ.)					Q(Typ.)				
	800MHz	900MHz	1.8GHz	2.0GHz	2.4GHz	800MHz	900MHz	1.8GHz	2.0GHz	2.4GHz
ELJRE1N0□FA	1.01	1.01	0.99	0.98	0.98	71.2	76.8	116.8	129.6	155.8
ELJRE1N2□FA	1.19	1.19	1.18	1.17	1.17	65.1	69.8	102.7	113.9	136.9
ELJRE1N5□FA	1.41	1.41	1.39	1.39	1.38	52.7	56.2	79.6	88.0	103.3
ELJRE1N8□FA	1.86	1.86	1.84	1.84	1.84	55.9	59.6	86.7	97.5	117.0
ELJRE2N2□FA	2.10	2.09	2.07	2.07	2.07	48.6	51.3	74.8	83.6	98.6
ELJRE2N7□FA	2.59	2.59	2.58	2.59	2.60	48.6	51.3	71.1	78.1	89.9
ELJRE3N3□FA	3.09	3.08	3.08	3.09	3.11	49.6	52.7	78.5	88.6	105.8
ELJRE3N9□FA	3.61	3.61	3.63	3.65	3.69	50.2	53.0	70.5	77.1	87.0
ELJRE4N7□FA	4.42	4.42	4.48	4.52	4.60	46.3	49.4	69.4	76.6	86.1
ELJRE5N6□FA	5.39	5.39	5.49	5.55	5.66	49.5	52.8	75.4	84.0	94.3
ELJRE6N8□FA	6.59	6.60	6.79	6.89	7.08	49.3	52.8	78.1	86.7	97.0
ELJRE8N2□FA	7.97	7.99	8.33	8.51	8.83	49.0	52.4	75.4	82.6	89.1
ELJRE10N□FA	9.60	9.63	10.22	10.51	11.07	44.2	47.0	63.4	68.0	69.7
ELJRE12N□FA	11.7	11.8	12.7	13.2	14.1	44.6	47.7	64.7	68.5	67.8
ELJRE15N□FA	14.6	14.6	16.2	17.1	18.7	42.4	45.4	58.4	59.5	56.9
ELJRE18N□FA	17.6	17.8	20.2	21.5	24.2	45.9	49.4	64.6	65.0	58.8
ELJRE22N□FA	21.7	21.9	26.0	28.3	33.3	43.0	45.8	54.2	52.2	43.8
ELJRE27N□FA	27.2	27.6	34.6	38.9	49.3	43.9	47.0	52.4	49.2	38.1
ELJRE33N□FA	33.3	33.9	45.5	53.2	75.2	41.8	44.4	45.2	39.3	26.2
ELJRE39N□FA	39.8	40.7	58.6	71.9	117.0	42.2	44.9	40.4	33.1	18.8
ELJRE47N□FA	48.3	49.6	79.8	107.1	260.7	42.6	45.3	34.1	24.0	8.8
ELJRE56N□FA	59.2	61.1	112.8	176.3	735.5	42.0	44.5	25.1	15.2	0.8
ELJRE68N□FA	73.9	77.0	185.9	459.7		41.8	44.0	21.5	9.5	
ELJRE82N□FA	94.0	99.6	494.3			39.7	41.5	7.7		
ELJRER10□FA	115.2	123.5	2141.2			35.3	36.7	1.6		
ELJRER12□FA	143.4	156.9				35.2	35.7			
ELJRER15□FA	188.5	210.6				40.6	41.5			
ELJRER18□FA	242.9	280.4				39.0	39.8			
ELJRER22□FA	337.9	416.6				43.2	45.3			

□ : Symbol of Tolerance



Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Sep. 2010

■ ND Type 2012 (0805)

● Dimensions in mm (not to scale)

● Recommended Land Pattern in mm (not to scale)

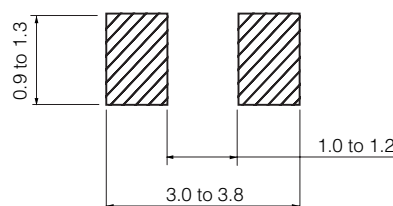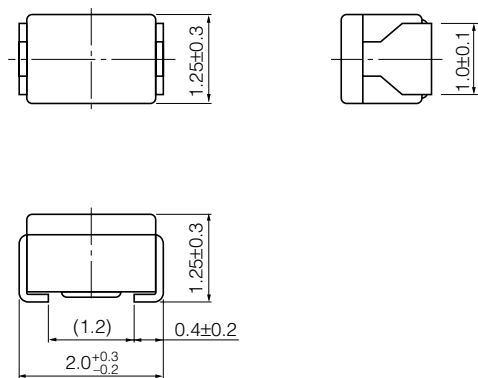

■ Standard Packing Quantity

● 3000 pcs./Reel

■ Standard Parts



Part No.	Inductance			Q		SRF *1 (MHz) min.	R _{DC} *2 (Ω) max.	DC Current (mA) max.		
	(nH)	Tolerance (%)	Test Freq. (MHz)	min.	Test Freq. (MHz)					
ELJND10N□F	10	K : ±10 %	100	10	100	3300	0.18	540		
ELJND12N□F	12			12		3300	0.24	535		
ELJND15N□F	15					3000	0.24	520		
ELJND18N□F	18					3000	0.29	480		
ELJND22N□F	22					2600	0.29	465		
ELJND27N□F	27					15	2500	0.34	455	
ELJND33N□F	33	25.2	2050	0.39	395					
ELJND39N□F	39		2000	0.41	390					
ELJND47N□F	47		1650	0.46	385					
ELJND56N□F	56		1550	0.51	360					
ELJND68N□F	68		1450	0.57	340					
ELJND82N□F	82		K : ±10 % or J : ± 5 %	25.2	10	25.2	1100	0.63	330	
ELJNDR10□F	100	8					25.2	800	0.86	285
ELJNDR12□F	120							600	0.99	275
ELJNDR15□F	150							600	1.47	230
ELJNDR18□F	180							600	1.61	195
ELJNDR22□F	220							500	1.84	170
ELJNDR27□F	270							300	1.95	165
ELJNDR33□F	330							200	2.16	160
ELJNDR39□F	390							150	2.37	150
ELJNDR47□F	470							150	2.56	145
ELJNDR56□F	560							100	2.69	140
ELJNDR68□F	680							100	3.02	130
ELJNDR82□F	820	80	3.38	125						
ELJND1R0□F	1000		7.96	8	7.96	80	3.88	120		

□ : Symbol of Tolerance *1 : Self Resonant Frequency *2 : DC Resistance

■ NC Type 2520 (1008)

● Dimensions in mm (not to scale)

● Recommended Land Pattern in mm (not to scale)

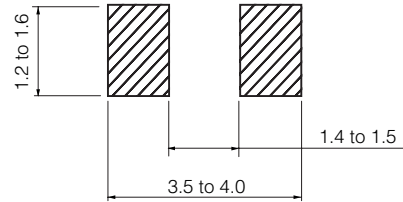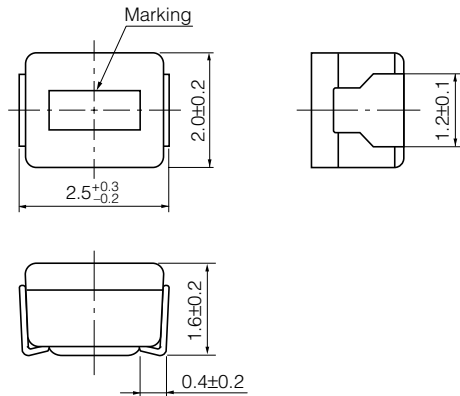

■ Standard Packing Quantity

● 2000 pcs./Reel


■ Standard Parts

Part No.	Inductance			Q		SRF *1 (MHz) min.	R _{DC} *2 (Ω) max.	DC Current (mA) max.
	(nH)	Tolerance (%)	Test Freq. (MHz)	min.	Test Freq. (MHz)			
ELJNC10N□F	10	K : ±10 %	100	10	100	2500	0.32	280
ELJNC12N□F	12					2200	0.34	270
ELJNC15N□F	15					1800	0.38	255
ELJNC18N□F	18					1550	0.40	250
ELJNC22N□F	22					1350	0.43	240
ELJNC27N□F	27					1150	0.47	230
ELJNC33N□F	33	K : ±10 % or J : ±5 %	100	15	100	1000	0.51	220
ELJNC39N□F	39					890	0.55	215
ELJNC47N□F	47					770	0.59	205
ELJNC56N□F	56					670	0.63	200
ELJNC68N□F	68					590	0.68	190
ELJNC82N□F	82					520	0.73	185
ELJNCR10□F	100		25.2	10	25.2	460	0.80	175
ELJNCR12□F	120					400	0.87	170
ELJNCR15□F	150					340	0.98	160
ELJNCR18□F	180					300	1.05	155
ELJNCR22□F	220					260	1.15	145
ELJNCR27□F	270					230	1.25	140
ELJNCR33□F	330					200	1.37	135
ELJNCR39□F	390					180	1.47	130
ELJNCR47□F	470					160	1.58	125
ELJNCR56□F	560					145	1.70	120
ELJNCR68□F	680					130	1.85	110
ELJNCR82□F	820					100	2.10	100


□ : Symbol of Tolerance *1 : Self Resonant Frequency *2 : DC Resistance

■ NA Type 3225 (1210)

● Dimensions in mm (not to scale)

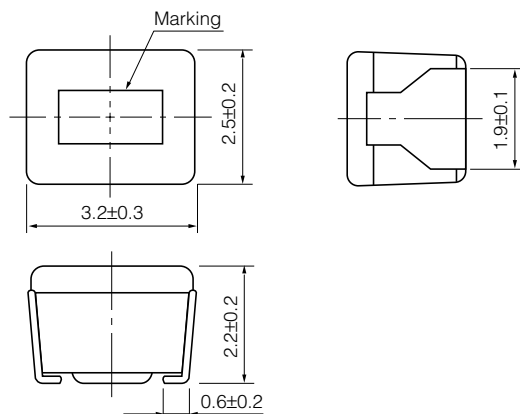

● Recommended Land Pattern in mm (not to scale)

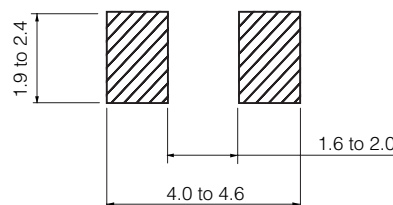

■ Standard Packing Quantity

● 2000 pcs./Reel

■ Standard Parts

Part No.	Inductance			Q		SRF *1 (MHz) min.	R _{DC} *2 (Ω) max.	DC Current (mA) max.		
	(nH)	Tolerance (%)	Test Freq. (MHz)	min.	Test Freq. (MHz)					
ELJNA47N□F	47	M : ±20 %	100	10	100	680	0.20	450		
ELJNA56N□F	56					600	0.22	420		
ELJNA68N□F	68					540	0.25	400		
ELJNA82N□F	82					500	0.27	380		
ELJNAR10□F	100		450		0.30	360				
ELJNAR12□F	120		25.2		25.2	400	0.67	240		
ELJNAR15□F	150					350	0.72	230		
ELJNAR18□F	180					320	0.81	220		
ELJNAR22□F	220	280				0.90	210			
ELJNAR27□F	270	250	1.0			200				
ELJNAR33□F	330	K : ±10 % or J : ± 5 %	13			7.96	220	1.1	190	
ELJNAR39□F	390						200	1.2	180	
ELJNAR47□F	470						180	1.4	175	
ELJNAR56□F	560				160		1.5	170		
ELJNAR68□F	680				150		1.7	155		
ELJNAR82□F	820				135		1.9	145		
ELJNA1R0□F	1000			J : ± 5 %	1		7.96	120	2.1	125
ELJNA1R2□F	1200							110	2.3	120
ELJNA1R5□F	1500	95				2.7		115		
ELJNA1R8□F	1800	85				3.0		110		
ELJNA2R2□F	2200	80				3.2		110		
ELJNA2R7□F	2700	70				3.6		105		
ELJNA3R3□F	3300	62				4.2		100		
ELJNA3R9□F	3900	57				4.4		95		
ELJNA4R7□F	4700	52				7.7		70		
ELJNA5R6□F	5600	46				8.7		65		
ELJNA6R8□F	6800	42	10			60				
ELJNA8R2□F	8200	38	11			60				

□ : Symbol of Tolerance *1 : Self Resonant Frequency *2 : DC Resistance

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Sep. 2010