

ZEC 1,5/ 7-LPV-7,5 C2

Order No.: 1898428

The figure shows a 10-position version of the product



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1898428>

Printed circuit board connector, Nominal current: 10 A, Rated voltage (III/2): 630 V, Pitch: 7.5 mm, Color: green, Metal surface: Sn, Assembly: PCB connector

Commercial data

GTIN (EAN)	4017918167134
Note	Made-to-order
sales group	E116
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.0077 KG
Catalog page information	Page 299 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Pitch	7.5 mm
Dimension a	52.5 mm
Number of positions	7

Technical data

Insulating material group	I
Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	6 kV
Rated surge voltage (II/2)	6 kV
Rated voltage (III/2)	630 V
Rated voltage (II/2)	1000 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	10 A
Nominal voltage U_N	400 V
Maximum load current	10 A
Insulating material	PA
Inflammability class acc. to UL 94	V0

Certificates / Approvals



Certification

CB, CUL, UL, VDE-PZI

CUL

Nominal voltage U_N	300 V
Nominal current I_N	10 A


UL

Nominal voltage U_N	300 V
Nominal current I_N	10 A


Diagrams/Drawings

Drilling plan/solder pad geometry

Size of the PCB: 1.6 ± 0.2 mm

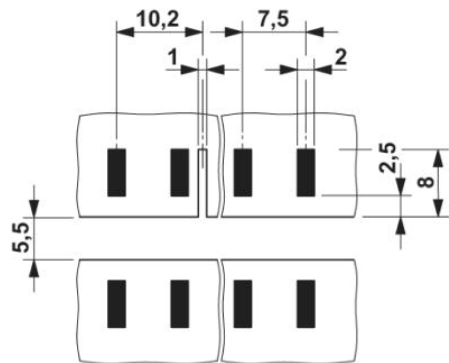

Dimensioned drawing

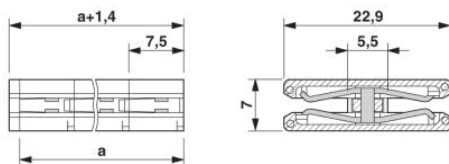

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;