


NOTES:

1. PLATING MUST CONFORM TO AMPHENOL SPEC. 349-50560.
CONTACT IS GOLD PLATED, OTHER METAL PARTS ARE NICKEL PLATED.
2. FOR ASSEMBLY INSTRUCTIONS SEE AMPHENOL SPEC. 349-50521 SHEET 2.
3. DO NOT SCALE THIS DRAWING.

903-401P-51S1		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. 	A	OFFICIAL ENG. RELEASE TO MFG.	1/16/98	42310	PB/

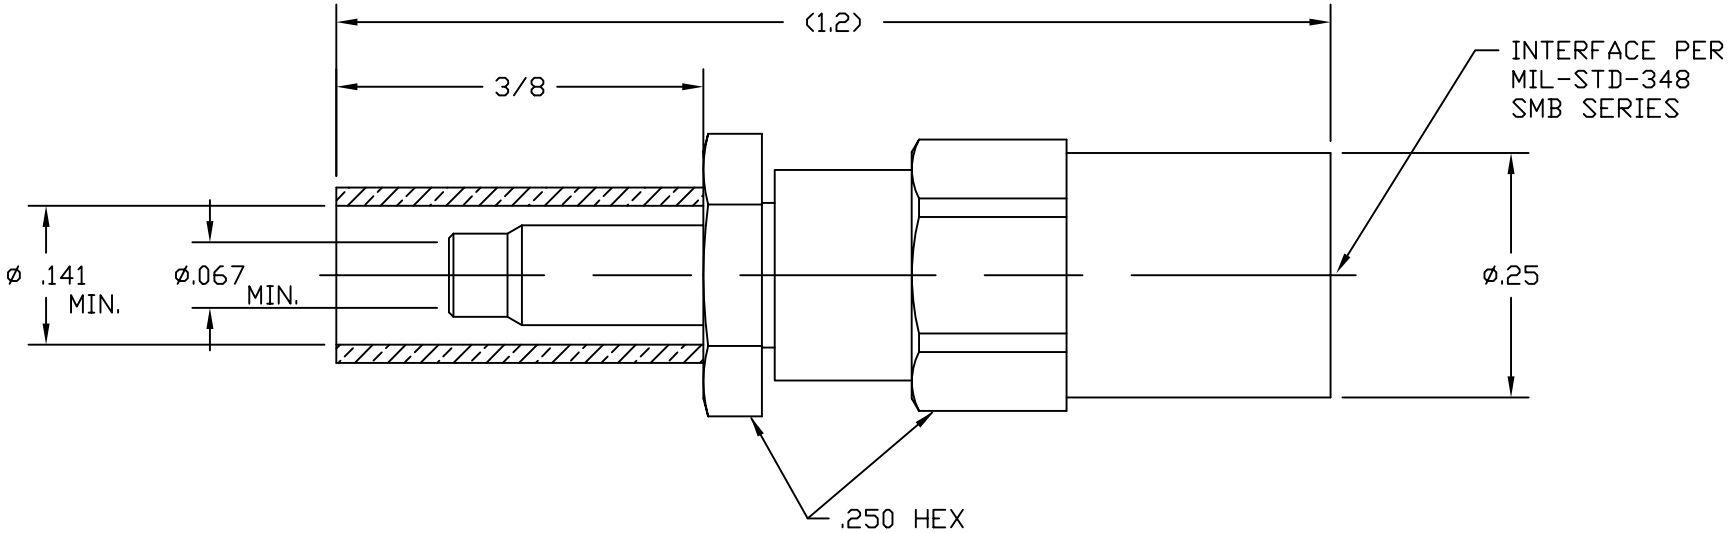

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL	DRAWN P. BRENZEL	DATE 16 JAN 98	TITLE SMB 50 OHM PLUG CRIMP FOR RD-316 DBL SHIELD		Amphenol Amphenol Corporation RF/Microwave Operations Danbury, Conn. U.S.A. 06810	
		ENGINEER P. BRENZEL	DATE 16 JAN 98				
	REFERENCE EAR 102-966868 0	APPROVED T. AUBIN	DATE 16 JAN 98				
		CAD FILE H:\PETE\SMB\903\ASSY\401P5S1C		CODE ID 74868	DWG SIZE B	DRAWING NO. 903-401P-51S1	ISSUE A