


NDT-03C

Recommened Solder Conditions


Reflow condition profile

Infrared reflow soldering


- Recommend temperature profile for Tin-lead solder

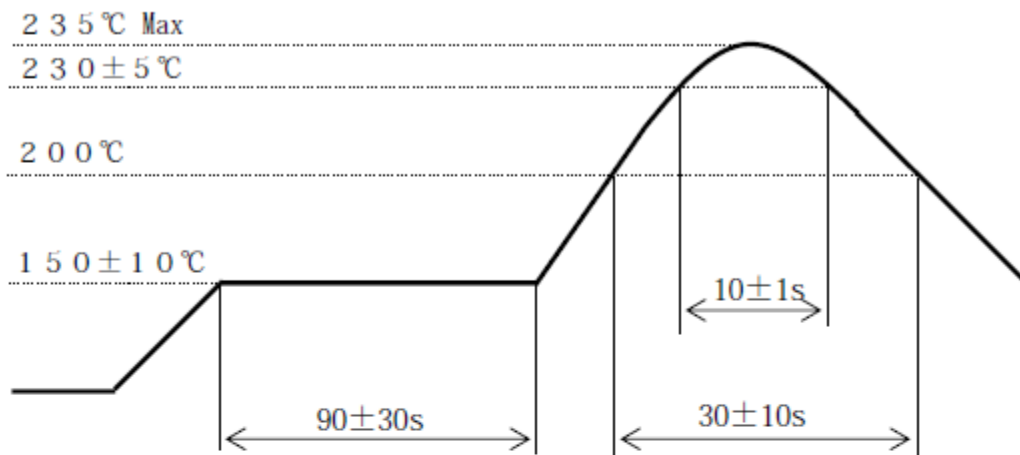

- Recommend temperature profile for lead-free solder

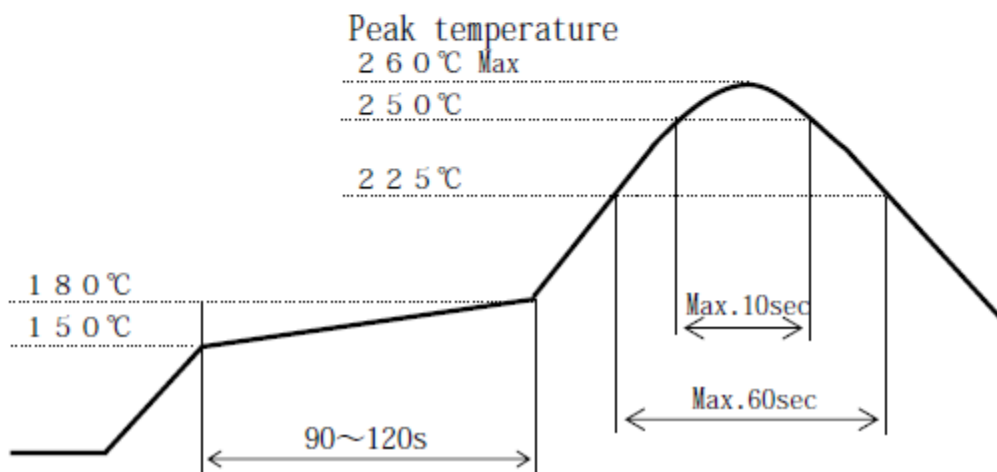

Unit [mm]

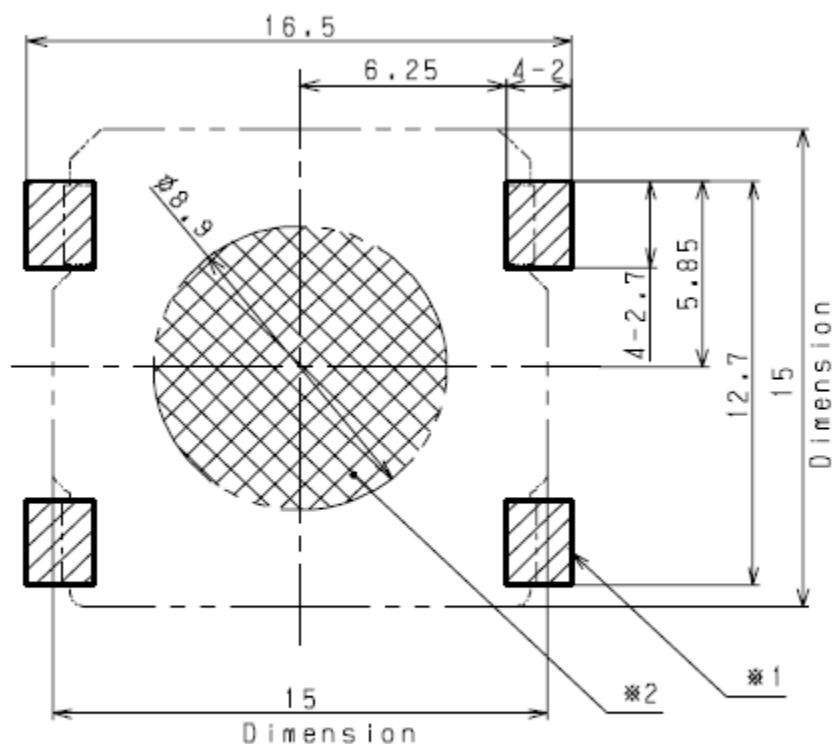

2) Avoid any pattern on the shade area(※2) of PC board is highly recommended.



Star Micronics America, Inc.
10 North Martingale road, Suite 400
Schaumburg, IL 60173
Phone: 1-800-782-7636
audiosales@starmicronics.com