


NTS Series / NTF Series

Temperature cycle : 1000 cycles



◆FEATURES


1. Large capacitance by small size.
2. Excellent noise absorption.
3. High permissible ripple current capability.
4. NTF: Temperature cycle : 1000 cycles.

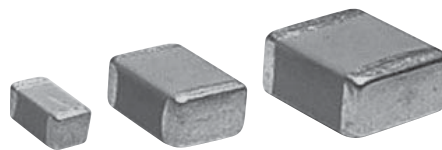

◆APPLICATIONS

1. Smoothing circuit of DC-DC converters.
2. On-board power supplies.
3. Voltage regulators for computers.
3. Noise suppressor for various kinds of equipments.
4. High reliability equipments.

◆CONSTRUCTION

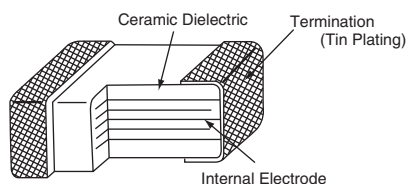

◆RATINGS



1. Category Temperature Range	-55 to +125°C
2. Rated Voltage Range	25, 50, 100, 250V _{dc}
3. Rated Capacitance Range	0.033 to 33μF
4. Rated Capacitance Tolerance	M (±20%) : Standard, K (±10%)
5. Temperature Characteristics	X7R
6. Rated Ripple Current	See No.5 on the following table

◆SPECIFICATIONS

No.	Items	Specification	Test Condition												
1	Withstand Voltage	No abnormality.	250% of rated voltage shall be applied for 5 seconds. (Only 250V _{dc} product : 475V)												
2	Insulation Resistance	100/C _R (MΩ) or 4000(MΩ) whichever is less.	Rated voltage shall be applied for 60±5 seconds at temperature 25±2℃.												
3	Rated Capacitance	Within specified tolerance.		C _R ≤10μF	C _R >10μF										
			Temperature	25±2℃											
4	Dissipation Factor	5.0% maximum.	Frequency	1±0.1kHz	120±12Hz										
			Voltage	1±0.2V _{rms}	0.5±0.2V _{rms}										
5	Rated Ripple Current	<table><tr><td>Size code</td><td>31</td><td>32</td><td>43</td><td>55</td></tr><tr><td>Arms</td><td>0.3</td><td>0.5</td><td>1.0</td><td>2.0</td></tr></table>	Size code	31	32	43	55	Arms	0.3	0.5	1.0	2.0	10kHz~1MHz (sine curve) Ripple voltage V _p shall be less than the rated voltage.		
Size code	31	32	43	55											
Arms	0.3	0.5	1.0	2.0											

NTS Series / NTF Series

◆SPECIFICATIONS

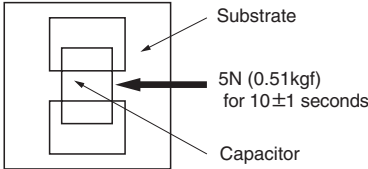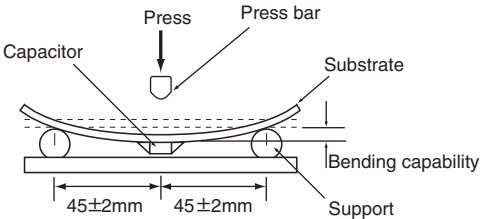No.	Items	Specification	Test Condition															
6	Adhesion	No visible damage.	 Substrate 5N (0.51kgf) for 10±1 seconds Capacitor															
7	Bend strength of the face plating	Appearance : No visible damage. ΔC/C : ±15%	The substrate shall be bend at a rate of 1mm/s for 5 seconds.  Press Press bar Substrate Capacitor Bending capability* Support 45±2mm 45±2mm *Bending capability NTS : 1mm NTF : 1mm or 2mm															
8	Solderability	Min. 75% of surface of the termination shall be covered with new solder	<table><tr><td>Solder</td><td>Pb Free</td><td>Eutectic</td></tr><tr><td>Solder Temperature</td><td>245±5℃</td><td>235±5℃</td></tr><tr><td>Dipping Time</td><td colspan="2">2±0.5sec.</td></tr></table>	Solder	Pb Free	Eutectic	Solder Temperature	245±5℃	235±5℃	Dipping Time	2±0.5sec.							
Solder	Pb Free	Eutectic																
Solder Temperature	245±5℃	235±5℃																
Dipping Time	2±0.5sec.																	
9	Resistance to Soldering Heat	Appearance : No visible damage. ΔC/C : ±15% D.F. : To meet the initial specification. I.R. : To meet the initial specification.	Solder Temperature : 260±5℃ Dipping Time : 2±0.5 seconds															
10	Temperature Cycle	Appearance : No visible damage. ΔC/C : ±15% D.F. : To meet the initial specification. I.R. : To meet the initial specification.	<table><tr><th>Step</th><th>Temperature (℃)</th><th>(min.)</th></tr><tr><td>1</td><td>Min. Category temperature ±3</td><td>30±3</td></tr><tr><td>2</td><td>Room temperature</td><td>3 max.</td></tr><tr><td>3</td><td>Max. Category temperature ±3</td><td>30±3</td></tr><tr><td>4</td><td>Room temperature</td><td>3 max.</td></tr></table> For above temperature cycle. NTS : For 5 cycles NTF : For 1000 cycles	Step	Temperature (℃)	(min.)	1	Min. Category temperature ±3	30±3	2	Room temperature	3 max.	3	Max. Category temperature ±3	30±3	4	Room temperature	3 max.
Step	Temperature (℃)	(min.)																
1	Min. Category temperature ±3	30±3																
2	Room temperature	3 max.																
3	Max. Category temperature ±3	30±3																
4	Room temperature	3 max.																
11	Humidity Load Life	Appearance : No abnormality. ΔC/C : ±15% D.F. : 10% maximum I.R. : 25/C _R (MΩ) or 1000(MΩ) whichever is less.	Temperature : 40±2℃ Humidity : 90 to 95%RH Voltage : Rated voltage Time : 500± ²⁴ ₀ hours															
12	Endurance	Appearance : No abnormality. ΔC/C : ±15% D.F. : 10% maximum I.R. : 50/C _R (MΩ) or 1000(MΩ) whichever is less.	Temperature : 125±3℃ Voltage : Rated voltage Time : 1000± ⁴⁸ ₀ hours															


*C_R : Rated Capacitance(μF)

◆STANDARD RATINGS


Rated voltage (Vdc)	Rated Capacitance (μF)	Dimensions(mm)				Maximum ripple current (Arms)	Part Number	Previous Part Number (Just for your reference)
		L	W	Tmax.	a			
25	1.0	3.2±0.2	1.6±0.2	1.8	0.5±0.3	0.3	KTS250B105M31N0T00	NTS30X7R1E105MT
	1.5						KTS250B155M31N0T00	NTS30X7R1E155MT
	2.2						KTS250B225M31N0T00	NTS30X7R1E225MT
	3.3						KTS250B335M32N0T00	NTS40X7R1E335MT
	4.7	3.2±0.4	2.5±0.3	2.6	0.6±0.3	0.5	KTS250B475M32N0T00	NTS40X7R1E475MT
	6.8						KTS250B685M32N0T00	NTS40X7R1E685MT
	10						KTS250B106M43N0T00	NTS50X7R1E106MT
	15	4.5±0.4	3.2±0.4	2.8	0.6±0.3	1.0	KTS250B156M43N0T00	NTS50X7R1E156MT
	22						KTS250B226M55N0T00	NTS60X7R1E226MT
	33						KTS250B336M55N0T00	NTS60X7R1E336MT
50	0.33	3.2±0.2	1.6±0.2	1.8	0.5±0.3	0.3	KTS500B334M31N0T00	NTS30X7R1H334MT
	0.47						KTS500B474M31N0T00	NTS30X7R1H474MT
	0.68						KTS500B684M31N0T00	NTS30X7R1H684MT
	1.0						KTS500B105M31N0T00	NTS30X7R1H105MT
	1.5	3.2±0.4	2.5±0.3	2.6	0.6±0.3	0.5	KTS500B155M32N0T00	NTS40X7R1H155MT
	2.2						KTS500B225M32N0T00	NTS40X7R1H225MT
	3.3						KTS500B335M32N0T00	NTS40X7R1H335MT
	4.7	4.5±0.4	3.2±0.4	2.8	0.6±0.3	1.0	KTS500B475M43N0T00	NTS50X7R1H475MT
	6.8						KTS500B685M43N0T00	NTS50X7R1H685MT
	10						KTS500B106M55N0T00	NTS60X7R1H106MT
	15	5.7±0.4	5.0±0.4	2.8	0.8±0.5	2.0	KTS500B156M55N0T00	NTS60X7R1H156MT
	0.1						KTS101B104M31N0T00	NTS30X7R2A104MT
	0.15						KTS101B154M31N0T00	NTS30X7R2A154MT
	0.22						KTS101B224M31N0T00	NTS30X7R2A224MT
100	0.33	3.2±0.2	1.6±0.2	1.8	0.5±0.3	0.3	KTS101B334M31N0T00	NTS30X7R2A334MT
	0.47						KTS101B474M31N0T00	NTS30X7R2A474MT
	0.68						KTS101B684M31N0T00	NTS30X7R2A684MT
	1.0						KTS101B105M32N0T00	NTS40X7R2A105MT
	1.5	3.2±0.4	2.5±0.3	2.6	0.6±0.3	0.5	KTS101B155M32N0T00	NTS40X7R2A155MT
	2.2						KTS101B225M32N0T00	NTS40X7R2A225MT
	3.3						KTS101B335M32N0T00	NTS50X7R2A335MT
	4.7						KTS101B475M43E0T00	—
	6.8	4.5±0.4	3.2±0.4	2.8	0.6±0.3	1.0	KTS101B685M43N0T00	NTS50X7R2A685MT
	10						KTS101B106M55N0T00	NTS60X7R2A106MT
	15						KTS101B156M55N0T00	NTS60X7R2A156MT
	22						KTS101B226M55N0T00	NTS60X7R2A226MT
	33	5.7±0.4	5.0±0.4	2.8	0.8±0.5	2.0	KTS101B336M55N0T00	NTS60X7R2A336MT
	47						KTS101B476M55N0T00	NTS60X7R2A476MT
	68						KTS101B686M55N0T00	NTS60X7R2A686MT
	100						KTS101B107M55N0T00	NTS60X7R2A107MT
250	0.033	3.2±0.2	1.6±0.2	1.8	0.5±0.3	0.3	KTS251B333M31N0T00	NTS30X7R2E333MT
	0.047						KTS251B473M31N0T00	NTS30X7R2E473MT
	0.068						KTS251B683M31N0T00	NTS30X7R2E683MT
	0.1						KTS251B104M31N0T00	NTS30X7R2E104MT
	0.15	3.2±0.4	2.5±0.3	2.6	0.6±0.3	0.5	KTS251B154M32N0T00	NTS40X7R2E154MT
	0.22						KTS251B224M32N0T00	NTS40X7R2E224MT
	0.33						KTS251B334M32N0T00	NTS40X7R2E334MT
	0.47	4.5±0.4	3.2±0.4	2.8	0.6±0.3	1.0	KTS251B474M43N0T00	NTS50X7R2E474MT
	0.68						KTS251B684M43N0T00	NTS50X7R2E684MT
	1.0						KTS251B105M55N0T00	NTS60X7R2E105MT
	1.5	5.7±0.4	5.0±0.4	2.8	0.8±0.5	2.0	KTS251B155M55N0T00	NTS60X7R2E155MT
	2.2						KTS251B225M55N0T00	NTS60X7R2E225MT
	3.3						KTS251B335M55N0T00	NTS60X7R2E335MT
	4.7						KTS251B475M55N0T00	NTS60X7R2E475MT

※Please consult with us when you consider the rating other than a standard table.

◆PART NUMBERING SYSTEM

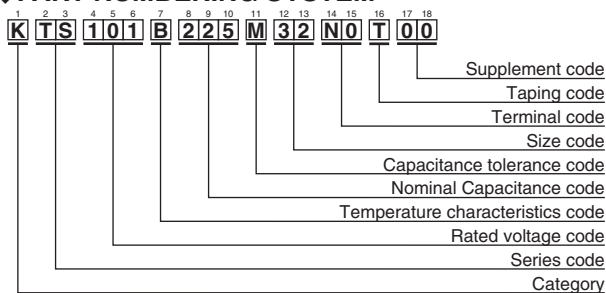

◆DIMENSIONS




Please refer to "Part Numbering System" of the beginning of a catalog for the details.

◆STANDARD RATINGS


Rated voltage (Vdc)	Rated Capacitance (μF)	Dimensions(mm)				Maximum ripple current (Arms)	Part Number
		L	W	Tmax.	a		
25	1.0	3.2±0.3	1.6±0.2	1.8	0.7±0.2	0.3	KTF250B105M31NLT00
	1.5						KTF250B155M31NLT00
	2.2						KTF250B225M31NLT00
	3.3						KTF250B335M32NHT00
	4.7	3.2±0.4	2.5±0.3	2.6	0.7±0.2	0.5	KTF250B475M32NHT00
	6.8						KTF250B685M32NHT00
	10						KTF250B106M43NHT00
	15	4.5±0.4	3.2±0.4	2.8	0.7±0.2	1.0	KTF250B156M43NHT00
	22						KTF250B226M55NHT00
	33						KTF250B336M55NHT00
50	0.33	3.2±0.3	1.6±0.2	1.8	0.7±0.2	0.3	KTF500B334M31NLT00
	0.47						KTF500B474M31NLT00
	0.68						KTF500B684M31NLT00
	1.0						KTF500B105M31NLT00
	1.5	3.2±0.4	2.5±0.3	2.6	0.7±0.2	0.5	KTF500B155M32NHT00
	2.2						KTF500B225M32NHT00
	3.3						KTF500B335M32NHT00
	4.7						KTF500B475M43NHT00
	6.8	4.5±0.4	3.2±0.4	2.8	0.7±0.2	1.0	KTF500B685M43NHT00
	10						KTF500B106M55NHT00
	15						KTF500B156M55NHT00
	0.1	3.2±0.3	1.6±0.2	1.8	0.7±0.2	0.3	KTF101B104M31NLT00
	0.15						KTF101B154M31NLT00
	0.22						KTF101B224M31NLT00
	0.33						KTF101B334M31NLT00
100	0.47	3.2±0.4	2.5±0.3	2.6	0.7±0.2	0.5	KTF101B474M31NLT00
	0.68						KTF101B684M31NLT00
	1.0						KTF101B105M32NHT00
	1.5						KTF101B155M32NHT00
	2.2	4.5±0.4	3.2±0.4	2.8	0.7±0.2	1.0	KTF101B225M32NHT00
	3.3						KTF101B335M43JHT00
	4.7						KTF101B475M43EHT00
	6.8						KTF101B685M55FHT00
	0.033	3.2±0.3	1.6±0.2	1.8	0.7±0.2	0.3	KTF251B333M31NLT00
	0.047						KTF251B473M31NLT00
	0.068						KTF251B683M31NLT00
	0.1						KTF251B104M31NLT00
250	0.15	3.2±0.4	2.5±0.3	2.6	0.7±0.2	0.5	KTF251B154M32NLT00
	0.22						KTF251B224M32NLT00
	0.33						KTF251B334M32NLT00
	0.47	4.5±0.4	3.2±0.4	2.8	0.7±0.2	1.0	KTF251B474M43NLT00
	0.68						KTF251B684M43NLT00
	1.0						KTF251B105M55NLT00
	1.5	5.7±0.4	5.0±0.4	2.8	1.0±0.4	2.0	KTF251B155M55NLT00
	0.033						KTF251B333M31NLT00
	0.047						KTF251B473M31NLT00
	0.068						KTF251B683M31NLT00

※Please consult with us when you consider the rating other than a standard table.

◆PART NUMBERING SYSTEM

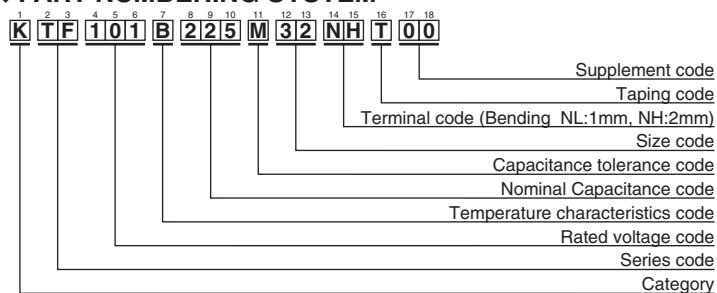

◆DIMENSIONS



Please refer to "Part Numbering System" of the beginning of a catalog for the details.