


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC INDUSTRIES INC. IT IS THE PROPERTY OF POSITRONIC INDUSTRIES INC. AND IS TO BE USED FOR THE PURPOSES SPECIFIED IN THE ORDER. THE DATA ON THIS DRAWING IS GIVEN FREE OF CHARGE, SINCE THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC INDUSTRIES INC. ASSUMES NO LIABILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK10756

DATE	REV	REVISION RECORD	APP	DR	CK
8-09	NC	ECO 31055	RCW	BS	TK

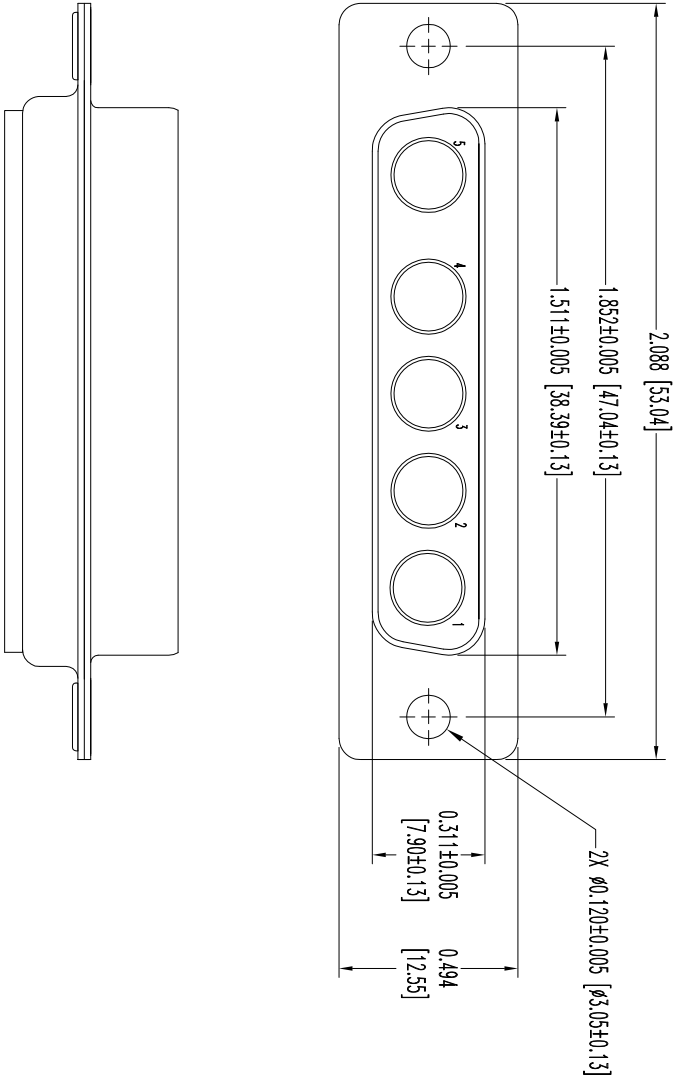


- NOTES:
1. MATERIAL AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519 UL 94V-0, BLUE COLOR.
SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
 2. ELECTRICAL CHARACTERISTICS:
INSULATOR RESISTANCE: 5 G OHMS.
WORKING VOLTAGE: 300 V r.m.s.
 3. WORKING TEMPERATURE: -55°C TO +125°C.
 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

FSCM 28198



DECIMAL TOL.
± 0.015 [0.38]

ANGULAR TOL.
± 5°

CBM SERIES

N.T.S.

DRAWN BY B SHELLBY
APPROVED BY R WILLIAMS

CBM5W5S00000

DATE
8-05-09

DRAWING NUMBER
SK10756

REV.
NC