

50W Series

Single Output Adaptor Switching Power Supply



Features

- Universal Input from 90-264VAC
- Built-in Class B EMI filter
- Overvoltage and Short Circuit Protection
- Light Weight

Applications

- Microcomputers
- Desktop Peripherals
- Printers
- Instruments

Safety Approvals

- UL 1950
- CSA 22.2 223 or 1402C Level 3
- TUV EN 60950 (IEC 950)

Mechanical Characteristics

- Dimensions:
- Length: 166mm (6.54in)
 - Width: 80mm (3.15in)
 - Height: 56.5mm (2.23in)
 - Weight: 0.55 Kgs (1.22lbs)

Output Specifications

Model	DC Output Voltage	Load		Ripple P-P	Total Tolerance	Safety Comments
		Min.	Max.			
PSA-124 (P)*	12V	0.1A	4.2A	150mV	+0.5VDC	Listed
PSA-153 (P)*	15V	0.1A	3.6A	150mV	+0.5VDC	
PSA-183 (P)*	18V	0.1A	3.0A	150mV	+0.5VDC	
PSA-242 (P)*	24V	0.1A	2.2A	200mV	+0.5VDC	Listed

(1) *Suffix(P) for output connector center polarity positive.

(2) Black color is standard, other colors, please contact us.

(3) 2.5mm inner diameter connector is alternative.

GN01F2

ISO 9001 • BABT • MITI
Facility Approvals



ENTERPRISE CO., LTD.

16, Lane 530, Chung Cheng N. Rd.
Sanchung City, Taipei
Taiwan 24103, R.O.C.
Phone: 886-2-988-2126
886-2-980-5255
Fax: 886-2-981-7086
886-2-983-3222

PHIHONG USA CORPORATION

U.S. Headquarters:
48607 Warm Springs Blvd.
Fremont, CA 94539
Phone: (510) 445-0100
Fax: (510) 445-1678
Email: usasales@phihongusa.com
Internet: <http://www.phihongusa.com>

Eastern Office:
3005 Brodhead Road
Bethlehem, PA 18017
Phone: (610) 866-9911
Fax: (610) 866-9920

Southwestern Office:
3325 Cochran St., Suite 200
Simi Valley, CA 93063
Phone: (805) 520-8177
Fax: (805) 520-3907

50W Series

Single Output Adaptor Switching Power Supply

Characteristics

Ac Input Voltage

90VAC-264VAC

AC Frequency

47 to 63Hz

AC Input Current

1.0A(rms) for 120VAC

0.5A(rms) for 240VAC

AC Inrush Current

40A at cold start (230V)

Humidity

20-90% Non-condensing

Efficiency

70% min. at max. load

Hold-up Time

16msec. min. at full load @110V

Switching Frequency

25KHz typical

Overvoltage Protection

At 110-130% of rated voltage

Overcurrent Protection

Output is equipped with short circuit protection

Operation Temperature

0 to +40°C

Storage Temperature

-40 to +70°C

Temperature Coefficient

0.05% per °C

MTBF

Calculated

Greater than 100,000 hours,
(MIL-HDBK-217)

EMI Requirements

FCC Class B rules

VDE 0871 Class B rules


AC Connector

IEC EN60302/C13

DC Connector

2.1mm Coaxial power plug

Dimension Diagram Unit: mm (inch)

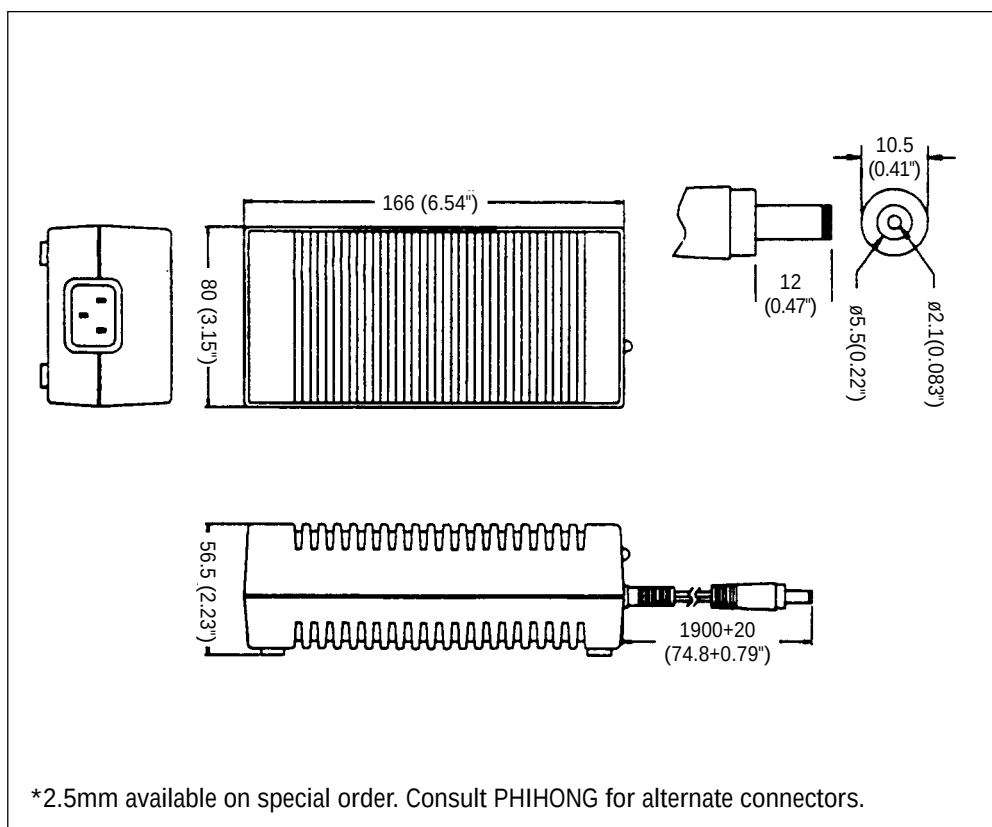

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phihong:](#)

[PSA-124](#) [PSA-153](#) [PSA183P](#) [PSA-242P](#)